



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-Z-U100 style)



FC2A COUPLING FOR JOINING PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING AND 316 STAINLESS STEEL HARDWARE

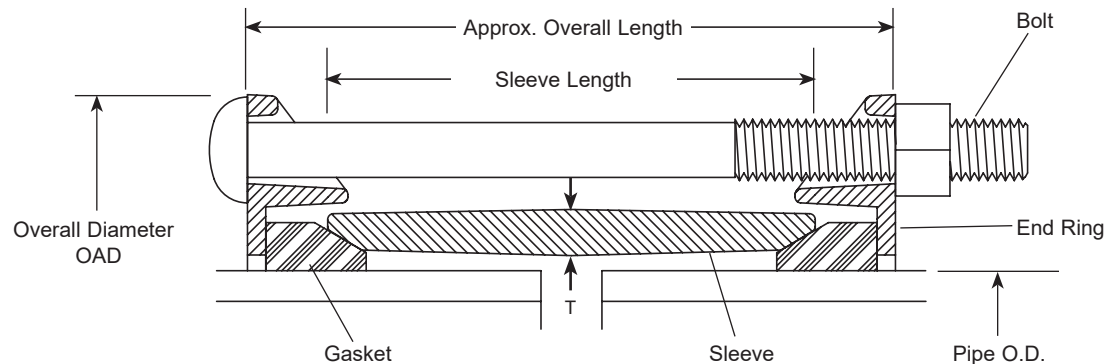

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. # (In.)	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. # (In.)	END RING COLOR	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.					
14"	15.30 - 15.70	Blk	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	21"	83	FC2A-1570-1570-Z-U100	
	15.30 - 15.70	Blk		16.00 - 16.35	Red									FC2A-1570-1635-Z-U100	
	15.30 - 15.70	Blk		16.40 - 16.88	Wht/Gry									FC2A-1570-1688-Z-U100	
	16.00 - 16.35	Red		16.00 - 16.35	Red									FC2A-1635-1635-Z-U100	
	16.00 - 16.35	Red		16.40 - 16.88	Wht/Gry									FC2A-1635-1688-Z-U100	
	16.40 - 16.88	Wht/Gry		16.40 - 16.88	Wht/Gry									FC2A-1688-1688-Z-U100	
16"	17.40 - 17.80	Blk	X	17.40 - 17.80	Blk	7"	1/2"	5/8"	10-1/2"	10	8-1/8"	23-5/16"	91	FC2A-1780-1780-Z-U100	
	17.40 - 17.80	Blk		18.45 - 18.97	Wht/Gry									FC2A-1780-1897-Z-U100	
	17.40 - 17.80	Blk		18.90 - 19.20	Wht/Gry									FC2A-1780-1920-Z-U100	
	18.45 - 18.97	Wht/Gry		18.45 - 18.97	Wht/Gry									FC2A-1897-1897-Z-U100	
	18.45 - 18.97	Wht/Gry		18.90 - 19.20	Wht/Gry									FC2A-1897-1920-Z-U100	
	18.90 - 19.20	Wht/Gry		18.90 - 19.20	Wht/Gry									FC2A-1920-1920-Z-U100	
18"	19.50 - 20.00	Blk	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	24-1/2"	117	FC2A-2000-2000-Z-U100	
20"	21.60 - 22.06	Blk	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	26-13/16"	137	FC2A-2206-2206-Z-U100	
24"	25.80 - 26.32	Blk	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	31-1/8"	211	FC2A-2632-2632-Z-U100	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12) or carbon steel per ASTM A36
- End Rings - Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194
- Finish - Fusion bonded epoxy. Applied per AWWA C213
- Gasket - SBR rubber per ASTM D2000
- Certified to NSF/ANSI 61
- Complies with AWWA C219 standards
- 150 psi rated working pressure
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/01/24

Submitted By: