



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-Z-U100 style)



10" & 12" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S WITH EPOXY COATING AND 316 STAINLESS STEEL HARDWARE

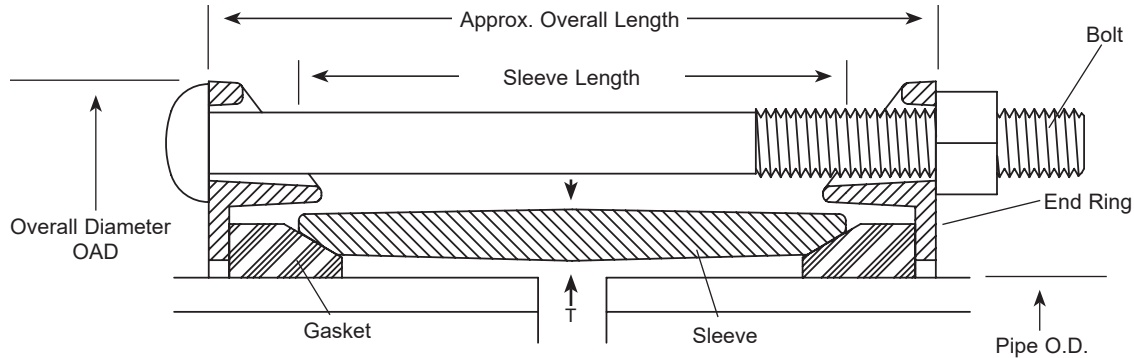

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. # (IN.)	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. # (IN.)	END RING COLOR	CENTER SLEEVE LGTH.	APPROX. (THICKNESS)	BOLTS DIA.	LGTH.	QTY.	APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
10"	10.75	Red	X	10.75	Red	6"	7/16"	5/8"	9"	6	7-1/8"	15-11/16"	48	FC2A-1075-1075-Z-U100	
	10.75	Red		11.10 - 11.40	Blk									FC2A-1075-1140-Z-U100	
	10.75	Red		11.42 - 11.77	Blk									FC2A-1075-1177-Z-U100	
	10.75	Red		11.77 - 12.12	Wht/Gry									FC2A-1075-1212-Z-U100	
	11.10 - 11.40	Blk		11.10 - 11.40	Blk									FC2A-1140-1140-Z-U100	
	11.10 - 11.40	Blk		11.42 - 11.77	Blk									FC2A-1140-1177-Z-U100	
	11.10 - 11.40	Blk		11.77 - 12.12	Wht/Gry									FC2A-1140-1212-Z-U100	
	11.42 - 11.77	Blk		11.42 - 11.77	Blk									FC2A-1177-1177-Z-U100	
	11.42 - 11.77	Blk		11.77 - 12.12	Wht/Gry									FC2A-1177-1212-Z-U100	
	11.77 - 12.12	Wht/Gry		11.77 - 12.12	Wht/Gry									FC2A-1212-1212-Z-U100	
12"	12.00	Blk	X	12.75	Blk	6"	1/2"	5/8"	9"	7	7-1/8"	18"	56	FC2A-1200-1275-Z-U100	
	12.00	Blk		13.20 - 13.50	Blk									FC2A-1200-1350-Z-U100	
	12.75	Blk		12.75	Blk									FC2A-1275-1275-Z-U100	
	12.75	Blk		13.20 - 13.50	Blk									FC2A-1275-1350-Z-U100	
	12.75	Blk		13.69 - 14.04	Wht/Gry									FC2A-1275-1404-Z-U100	
	12.75	Blk		14.03 - 14.38	Wht/Gry									FC2A-1275-1438-Z-U100	
	13.20 - 13.50	Blk		13.20 - 13.50	Blk									FC2A-1350-1350-Z-U100	
	13.20 - 13.50	Blk		13.69 - 14.04	Wht/Gry									FC2A-1350-1404-Z-U100	
	13.20 - 13.50	Blk		14.03 - 14.38	Wht/Gry									FC2A-1350-1438-Z-U100	
	13.69 - 14.04	Wht/Gry		13.69 - 14.04	Wht/Gry									FC2A-1404-1404-Z-U100	
	13.69 - 14.04	Wht/Gry		14.03 - 14.38	Wht/Gry									FC2A-1404-1438-Z-U100	
	14.03 - 14.38	Wht/Gry		14.03 - 14.38	Wht/Gry									FC2A-1438-1438-Z-U100	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12)
- End Rings - Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194
- Coating - Fusion-bonded epoxy. Applied per AWWA C213
- Certified to ANSI/NSF 61
- Gasket - Molded SBR rubber per ASTM D2000
- Complies with AWWA C219
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

12/13/22

Submitted By: