


SUBMITTAL INFORMATION


Steel Coupling - (FC3-xxx-xx style)



STEEL COUPLINGS WITH DUCTILE IRON END RINGS

NOM. PIPE SIZE (IN.)	PIPE O.D. (IN.)	SLEEVE LENGTH (IN.)	CATALOG NUMBER	NUMBER OF BOLTS	BOLT DIA. & LENGTH (IN.)	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
1/2	0.84	5	FC3-084-5	2	1/2 x 7	2	
		7	FC3-084-7	2	1/2 x 9	2	
3/4	1.05	5	FC3-105-5	2	1/2 x 7	2	
		7	FC3-105-7	2	1/2 x 9	3	
1	1.32	12	FC3-105-12	2	1/2 x 14	3	
		5	FC3-132-5	2	1/2 x 7	3	
1-1/4	1.66	7	FC3-132-7	2	1/2 x 9	3	
		12	FC3-132-12	2	1/2 x 14	4	
1-1/2	1.90	5	FC3-166-5	2	1/2 x 7	4	
		7	FC3-166-7	2	1/2 x 9	4	
2	2.38	12	FC3-166-12	2	1/2 x 14	5	
		5	FC3-190-5	2	1/2 x 7	4	
2-1/2	2.88	7	FC3-190-7	2	1/2 x 9	5	
		12	FC3-190-12	2	1/2 x 14	7	
3	3.50	5	FC3-238-5	2	5/8 x 8	7	
		5	FC3-238-5-H	3	5/8 x 8	10	
4	4.50	7	FC3-238-7	2	5/8 x 10-1/2	10	
		7	FC3-238-7-H	3	5/8 x 10-1/2	12	
4	4.80	12	FC3-238-12	2	5/8 x 15	13	
		12	FC3-238-12-H	3	5/8 x 15	14	
6	6.63	5	FC3-288-5	3	5/8 x 8	10	
		7	FC3-288-7	3	5/8 x 10-1/2	11	
6	6.90	12	FC3-288-12	3	5/8 x 15	14	
		24	FC3-288-24	3	5/8 x 27-3/8	24	
8	8.63	5	FC3-350-5	4	5/8 x 8	16	
		7	FC3-350-7	4	5/8 x 10-1/2	17	
8	8.63	12	FC3-350-12	4	5/8 x 15	26	
		24	FC3-350-24	3	5/8 x 27-3/8	35	
10	10.75	5	FC3-450-5	4	5/8 x 8	16	
		7	FC3-450-7	4	5/8 x 10-1/2	17	
10	10.75	12	FC3-450-12	4	5/8 x 15	27	
		16	FC3-450-16	4	5/8 x 20	31	
12	12.75	24	FC3-450-24	4	5/8 x 27-3/8	38	
		5	FC3-480-5	4	5/8 x 9	16	
12	12.75	7	FC3-480-7	4	5/8 x 11	17	
		12	FC3-480-12	4	5/8 x 15	27	
12	12.75	5	FC3-663-5	6	5/8 x 8	25	
		7	FC3-663-7	6	5/8 x 10-1/2	31	
12	12.75	12	FC3-663-12	6	5/8 x 15	50	
		16	FC3-663-16	6	5/8 x 20	65	
12	12.75	24	FC3-663-24	4	5/8 x 27-3/8	38	
		5	FC3-690-5	6	5/8 x 9	25	
12	12.75	16	FC3-690-16	6	5/8 x 19	50	
		5	FC3-863-5	6	5/8 x 8	34	
12	12.75	7	FC3-863-7	6	5/8 x 10-1/2	41	
		12	FC3-863-12	6	5/8 x 15	51	
12	12.75	16	FC3-863-16	6	5/8 x 20	63	
		24	FC3-863-24	6	5/8 x 27-3/8	78	
12	12.75	7	FC3-1075-7	8	5/8 x 11	49	
		5	FC3-1275-5	8	5/8 x 9	47	
		16	FC3-1275-16	8	5/8 x 19	88	

"-H" indicates Three Bolt Style

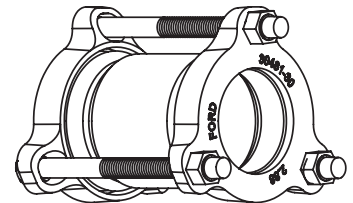

FEATURES

- Center Sleeve - Steel per ASTM A1011 with black Armorguard e-coat (exterior has an additional fusion-bonded epoxy coating)
- End Rings - Ductile iron (Grade 65-45-12) per ASTM A536 with red fusion-bonded epoxy coating
- Gaskets - NBR (Buna-N) per ASTM D2000
- Bolts and Nuts - High strength low alloy steel per ASTM A242
- Rated Working Pressure - 300 psi

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/03/25

Submitted By: