



# SUBMITTAL INFORMATION

## Fabricated Steel Coupling - (FC4-xxxx-AxxD style)



14" - 36" STYLE FC4 COUPLINGS FOR JOINING STEEL SIZE PIPES WITH THE SAME O.D.

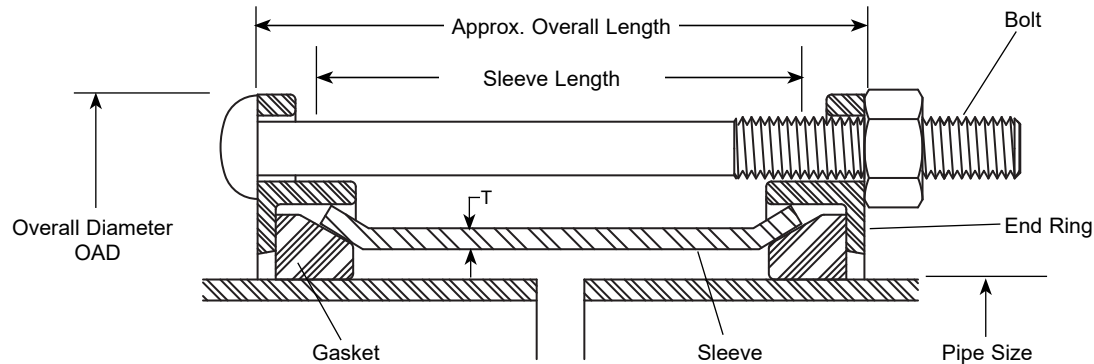

| NOM. PIPE SIZE | PIPE O.D. | CENTER SLEEVE |               | APPROX. OVERALL LGTH. | BOLT |         |      | APPROX. WT. LBS. | OAD     | RATED WORKING PRESSURE | CATALOG NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------|-----------|---------------|---------------|-----------------------|------|---------|------|------------------|---------|------------------------|----------------|---------------------|
|                |           | LGTH.         | (T) THICKNESS |                       | DIA. | LGTH.   | QTY. |                  |         |                        |                |                     |
| 14"            | 14.00     | 5"            | 1/4"          | 6-1/8"                | 5/8" | 8-1/2"  | 9    | 54               | 18-5/8" | 472                    | FC4-1400-A05D  |                     |
|                | 14.00     | 7"            |               | 8-1/8"                |      | 10-1/2" |      | 75               |         |                        | FC4-1400-A07D  |                     |
|                | 14.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 85               |         |                        | FC4-1400-A10D  |                     |
| 16"            | 16.00     | 5"            | 1/4"          | 6-1/8"                | 5/8" | 8-1/2"  | 10   | 62               | 20-5/8" | 416                    | FC4-1600-A05D  |                     |
|                | 16.00     | 7"            |               | 8-1/8"                |      | 10-1/2" |      | 83               |         |                        | FC4-1600-A07D  |                     |
|                | 16.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 96               |         |                        | FC4-1600-A10D  |                     |
| 18"            | 18.00     | 5"            | 1/4"          | 6-1/8"                | 5/8" | 8-1/2"  | 11   | 69               | 22-5/8" | 373                    | FC4-1800-A05D  |                     |
|                | 18.00     | 7"            |               | 8-1/8"                |      | 10-1/2" |      | 94               |         |                        | FC4-1800-A07D  |                     |
|                | 18.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 107              |         |                        | FC4-1800-A10D  |                     |
| 20"            | 20.00     | 7"            | 1/4"          | 8-1/8"                | 5/8" | 10-1/2" | 12   | 101              | 24-5/8" | 337                    | FC4-2000-A07D  |                     |
|                | 20.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 116              |         |                        | FC4-2000-A10D  |                     |
| 24"            | 24.00     | 7"            | 1/4"          | 8-1/8"                | 5/8" | 10-1/2" | 14   | 119              | 28-5/8" | 283                    | FC4-2400-A07D  |                     |
|                | 24.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 116              |         |                        | FC4-2400-A10D  |                     |
| 30"            | 30.00     | 7"            | 1/4"          | 8-1/8"                | 5/8" | 10-1/2" | 16   | 135              | 34-5/8" | 246                    | FC4-3000-A07D  |                     |
|                | 30.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 157              |         |                        | FC4-3000-A10D  |                     |
| 36"            | 36.00     | 7"            | 1/4"          | 8-1/8"                | 5/8" | 10-1/2" | 18   | 158              | 40-5/8" | 205                    | FC4-3600-A07D  |                     |
|                | 36.00     | 10"           |               | 11-1/8"               |      | 13-1/2" |      | 186              |         |                        | FC4-3600-A10D  |                     |

**Note:** Flexible couplings do not restrain axial forces on piping.

## FEATURES

- Center Sleeve: Carbon steel per ASTM A36
- End Rings: Cold rolled carbon steel per AISI 1018-1020
- Bolts and Nuts: 316 stainless steel per ASTM A193 and A194
- Coating: 3M ScotchKote 206N fusion bonded epoxy
- Gasket: Extruded EPDM rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

03/02/17

Submitted By: