


SUBMITTAL INFORMATION





14" - 36" STYLE FC4 COUPLINGS FOR JOINING DUCTILE IRON SIZE PIPES WITH THE SAME O.D.

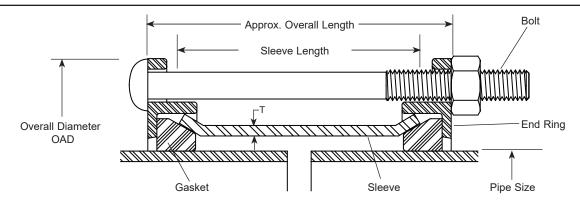

| Nom. Pipe Size | PIPE O.D. (In.) | CENTER SLEEVE | | Approx. | Вогт | | | Approx. | | RATED | | |
|----------------------|-----------------------|---------------|-------------|------------------|------|---------|------|-------------|-----------|------------------------------|-------------------|---------------------|
| | | L GТН. | (T)HICKNESS | OVERALL LGTH. | DIA. | Lgтн. | QTY. | WT. LBS. | OAD | Working Pressure (PSI) | Catalog Number | ✓ SUBMITTED ITEM(S) |
| 14" | 15.30 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 9 | 80 | 19-11/16" | 434 | FC4-1530-A07E-U | |
| | 15.30 | 10" | | 11-1/8" | | 13-1/2" | | 91 | 19-11/10 | | FC4-1530-A10E-U | |
| 16" | 17.40 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 10 | 89 | 22" | 385 | FC4-1740-A07E-U | |
| | 17.40 | 10" | | 11-1/8" | | 13-1/2" | | 102 | 22 | 300 | FC4-1740-A10E-U | |
| 18" | 19.50 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 11 | 99 | 04.4/01 | 345 | FC4-1950-A07E-U | |
| | 19.50 | 10" | | 11-1/8" | | 13-1/2" | | 114 | 24-1/8" | | FC4-1950-A10E-U | |
| 20" | 21.60 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 12 | 107 | 25-1/4" | 313 | FC4-2160-A07E-U | |
| | 21.60 | 10" | | 11-1/8" | | 13-1/2" | | 124 | | | FC4-2160-A10E-U | |
| 24" | 25.80 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 14 | 127 | 30-7/16" | 264 | FC4-2580-A07E-U | |
| | 25.80 | 10" | | 11-1/8" | | 13-1/2" | | 146 | | | FC4-2580-A10E-U | |
| 30" | 32.00 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 16 | 143 | 36-5/8" | 230 | FC4-3200-A07E-U | |
| | 32.00 | 10" | | 11-1/8" | | 13-1/2" | | 166 | | | FC4-3200-A10E-U | |
| 36" | 38.30 | 7" | 1/4" | 8-1/8" | 5/8" | 10-1/2" | 18 | 186 | 42-11/16" | 193 | FC4-3830-A07E-U | |
| | 38.30 | 10" | | 11-1/8" | | 13-1/2" | | 196 | | | FC4-3830-A10E-U | |

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve Carbon steel per ASTM A36
- End Rings Cold rolled carbon steel per AISI 1020
- Bolts and Nuts High strength low alloy steel per ASTM A242 or AWWA C111
- Coating Fusion bonded epoxy NSF61 approved
- Gasket Extruded SBR rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By: