



# SUBMITTAL INFORMATION

## Fabricated Steel Coupling - (FC4-xxxx-BxxA style)



30" - 60" STYLE FC4 COUPLINGS FOR JOINING STEEL SIZE PIPES WITH THE SAME O.D.

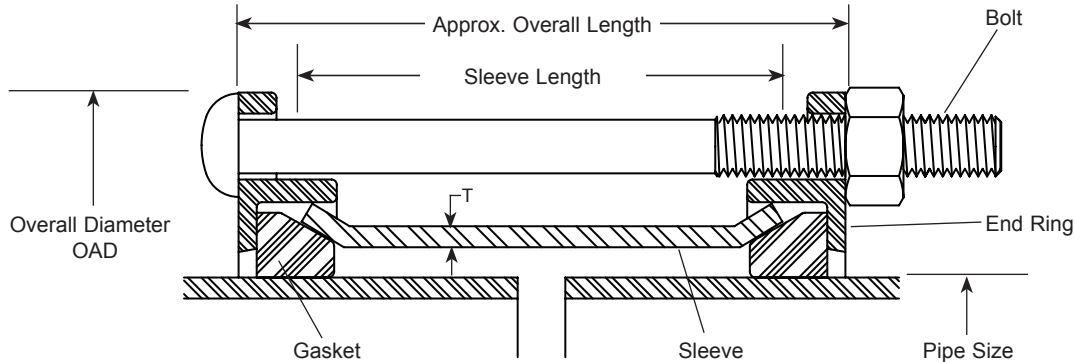

| NOM.<br>PIPE<br>SIZE | PIPE<br>O.D.<br>(IN.) | CENTER SLEEVE |              | APPROX.<br>OVERALL<br>LGTH. | BOLT |         |      | APPROX.<br>Wt.<br>LBS. | OAD     | RATED<br>WORKING<br>PRESSURE<br>(PSI) | CATALOG<br>NUMBER | ✓ SUBMITTED<br>ITEM(S) |
|----------------------|-----------------------|---------------|--------------|-----------------------------|------|---------|------|------------------------|---------|---------------------------------------|-------------------|------------------------|
|                      |                       | LGTH.         | (T)THICKNESS |                             | DIA. | LGTH.   | QTY. |                        |         |                                       |                   |                        |
| 30"                  | 30.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 16   | 159                    | 34-5/8" | 361                                   | FC4-3000-B07A     |                        |
|                      | 30.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 189                    |         |                                       | FC4-3000-B10A     |                        |
| 36"                  | 36.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 18   | 190                    | 40-5/8" | 306                                   | FC4-3600-B07A     |                        |
|                      | 36.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 229                    |         |                                       | FC4-3600-B10A     |                        |
| 42"                  | 42.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 20   | 257                    | 47-1/8" | 263                                   | FC4-4200-B07A     |                        |
|                      | 42.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 302                    |         |                                       | FC4-4200-B10A     |                        |
| 48"                  | 48.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 22   | 294                    | 53-1/8" | 231                                   | FC4-4800-B07A     |                        |
|                      | 48.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 345                    |         |                                       | FC4-4800-B10A     |                        |
| 52"                  | 52.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 22   | 330                    | 56-3/4" | 213                                   | FC4-5200-B07A     |                        |
|                      | 52.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 370                    |         |                                       | FC4-5200-B10A     |                        |
| 54"                  | 54.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 24   | 339                    | 60-1/8" | 213                                   | FC4-5400-B07A     |                        |
|                      | 54.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 398                    |         |                                       | FC4-5400-B10A     |                        |
| 60"                  | 60.00                 | 7"            | 3/8"         | 8-1/8"                      | 5/8" | 10-1/2" | 26   | 373                    | 64-5/8" | 200                                   | FC4-6000-B07A     |                        |
|                      | 60.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 437                    |         |                                       | FC4-6000-B10A     |                        |
|                      | 61.00                 | 7"            |              | 8-1/8"                      |      | 10-1/2" |      | 378                    | 66-1/8" |                                       | FC4-6100-B07A     |                        |
|                      | 61.00                 | 10"           |              | 11-1/8"                     |      | 13-1/2" |      | 444                    |         |                                       | FC4-6100-B10A     |                        |

**Note:** Flexible couplings do not restrain axial forces on piping.

### FEATURES

- Center Sleeve - Carbon steel per ASTM A36
- End Rings - Cold rolled carbon steel per AISI 1020
- Bolts and Nuts - High strength low alloy steel per ASTM A242 or AWWA C111
- Coating - NSF61 approved epoxy
- Gasket - Extruded EPDM rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

11/25/20

Submitted By: