



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-BxxR-BEC style)



30"-60" STYLE FC4 COUPLINGS WITH UNTAPPED END CAP

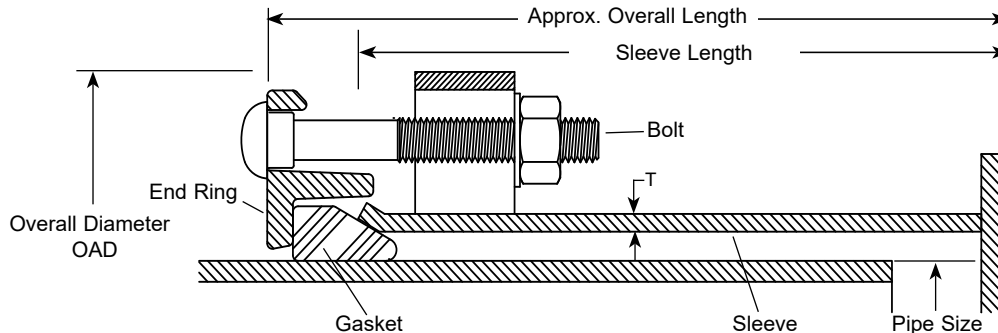

NOM. PIPE SIZE	PIPE O.D.	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T)HICKNESS		DIA.	LGTH.	QTY.					
30"	30.00	7"	3/8"	9-1/8"	5/8"	5"	16	447	34-5/8"	150	FC4-3000-B07R-BEC	
	30.00	10"		12-1/8"							FC4-3000-B10R-BEC	
36"	36.00	7"	3/8"	9-1/8"			18	646	40-5/8"		FC4-3600-B07R-BEC	
	36.00	10"		12-1/8"							FC4-3600-B10R-BEC	
42"	42.00	7"	3/8"	9-1/8"			20	843	47-1/8"		FC4-4200-B07R-BEC	
	42.00	10"		12-1/8"							FC4-4200-B10R-BEC	
48"	48.00	7"	3/8"	9-1/8"			22	970	53-1/8"		FC4-4800-B07R-BEC	
	48.00	10"		12-1/8"							FC4-4800-B10R-BEC	
54"	54.00	7"	3/8"	9-1/8"			24	1095	60-1/8"		FC4-5400-B07R-BEC	
	54.00	10"		12-1/8"							FC4-5400-B10R-BEC	
60"	61.00	7"	3/8"	9-1/8"			26	1250	66-1/8"		FC4-6100-B07R-BEC	
	61.00	10"		12-1/8"							FC4-6100-B10R-BEC	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon steel per ASTM A36
- End Rings: Carbon steel per AISI 1018/1020
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black alkyd enamel shop coat - NSF61 approved
- Gasket: Extruded SBR rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/05/20

Submitted By: