



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-BxxT-U100 style)



14" - 60" STYLE FC4 COUPLINGS WITH 316 STAINLESS STEEL HARDWARE FOR JOINING DUCTILE IRON SIZE PIPES WITH THE SAME O.D.

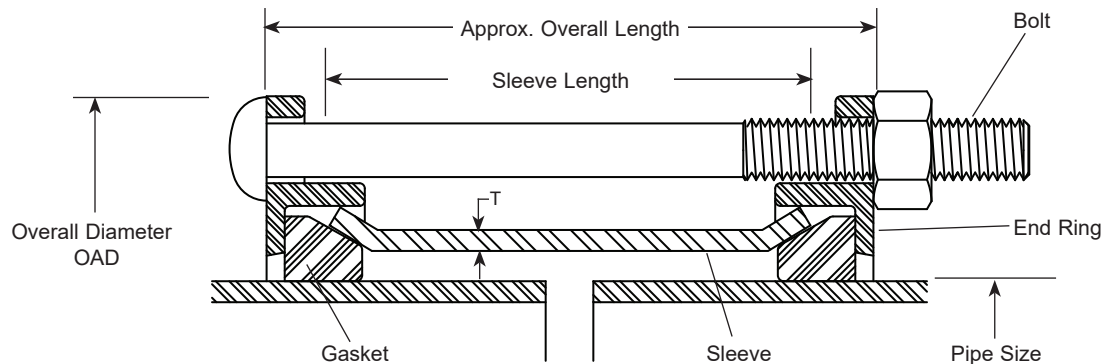

NOM. PIPE SIZE	PIPE O.D. (IN.)	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T) THICKNESS		DIA.	LGTH.	QTY.					
14"	15.30	7"	3/8"	8-1/8"	5/8"	10-1/2"	9	92	19-11/16"	592	FC4-1530-B07T-U100	
	15.30	10"		11-1/8"		13-1/2"		109			FC4-1530-B10T-U100	
16"	17.40	7"	3/8"	8-1/8"	5/8"	10-1/2"	10	103	22"	567	FC4-1740-B07T-U100	
	17.40	10"		11-1/8"		13-1/2"		122			FC4-1740-B10T-U100	
18"	19.50	7"	3/8"	8-1/8"	5/8"	10-1/2"	11	115	24-1/8"	512	FC4-1950-B07T-U100	
	19.50	10"		11-1/8"		13-1/2"		136			FC4-1950-B10T-U100	
20"	21.60	7"	3/8"	8-1/8"	5/8"	10-1/2"	12	125	25-1/4"	463	FC4-2160-B07T-U100	
	21.60	10"		11-1/8"		13-1/2"		148			FC4-2160-B10T-U100	
24"	25.80	7"	3/8"	8-1/8"	5/8"	10-1/2"	14	148	30-7/16"	392	FC4-2580-B07T-U100	
	25.80	10"		11-1/8"		13-1/2"		176			FC4-2580-B10T-U100	
30"	32.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	16	166	36-5/8"	343	FC4-3200-B07T-U100	
	32.00	10"		11-1/8"		13-1/2"		201			FC4-3200-B10T-U100	
36"	38.30	7"	3/8"	8-1/8"	5/8"	10-1/2"	18	226	42-11/16"	289	FC4-3830-B07T-U100	
	38.30	10"		11-1/8"		13-1/2"		267			FC4-3830-B10T-U100	
42"	44.50	7"	3/8"	8-1/8"	5/8"	10-1/2"	20	271	49-5/8"	250	FC4-4450-B07T-U100	
	44.50	10"		11-1/8"		13-1/2"		318			FC4-4450-B10T-U100	
48"	50.80	7"	3/8"	8-1/8"	5/8"	10-1/2"	22	309	55-15/16"	220	FC4-5080-B07T-U100	
	50.80	10"		11-1/8"		13-1/2"		363			FC4-5080-B10T-U100	
54"	57.56	7"	3/8"	8-1/8"	5/8"	10-1/2"	24	353	62-11/16"	200	FC4-5756-B07T-U100	
	57.56	10"		11-1/8"		13-1/2"		414			FC4-5756-B10T-U100	
60"	61.61	7"	3/8"	8-1/8"	5/8"	10-1/2"	26	382	66-3/4"	200	FC4-6161-B07T-U100	
	61.61	10"		11-1/8"		13-1/2"		447			FC4-6161-B10T-U100	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon steel per ASTM A36
- End Rings: Cold rolled carbon steel per AISI 1020
- Bolts and Nuts: Type 316 stainless steel per ASTM A193 and A194
- Coating: Black epoxy - NSF61 approved
- Gasket: Extruded NBR (Buna-N) rubber per ASTM D2000
- Complies with AWWA C219 standards
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/29/20

Submitted By: