



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-BxxX style)



**30" - 60" STYLE FC4 COUPLINGS FOR JOINING STEEL SIZE PIPES WITH THE SAME O.D.
WITH 304 STAINLESS STEEL HARDWARE**

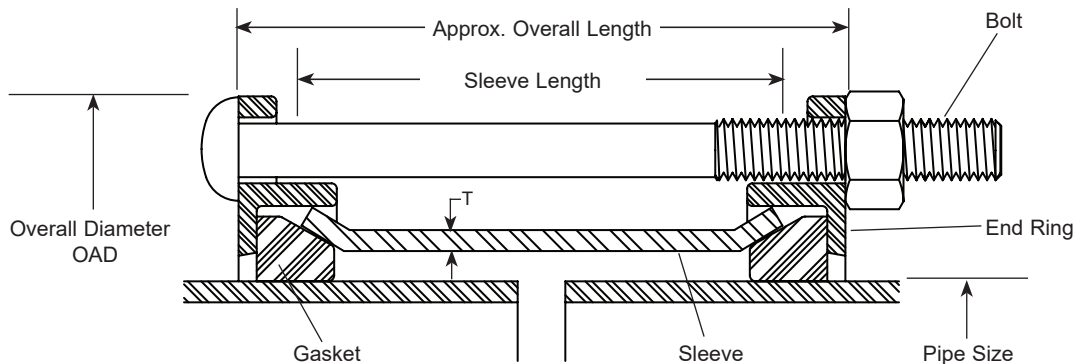

NOM. PIPE SIZE	PIPE O.D.	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T)THICKNESS		DIA.	LGTH.	QTY.					
30"	30.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	16	159	34-5/8"	361	FC4-3000-B07X	
	30.00	10"		11-1/8"		13-1/2"		189			FC4-3000-B10X	
36"	36.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	18	190	40-5/8"	306	FC4-3600-B07X	
	36.00	10"		11-1/8"		13-1/2"		229			FC4-3600-B10X	
42"	42.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	20	257	47-1/8"	263	FC4-4200-B07X	
	42.00	10"		11-1/8"		13-1/2"		302			FC4-4200-B10X	
48"	48.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	22	294	53-1/8"	231	FC4-4800-B07X	
	48.00	10"		11-1/8"		13-1/2"		345			FC4-4800-B10X	
54"	54.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	24	339	60-1/8"	210	FC4-5400-B07X	
	54.00	10"		11-1/8"		13-1/2"		398			FC4-5400-B10X	
60"	61.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	26	378	66-1/8"	200	FC4-6100-B07X	
	61.00	10"		11-1/8"		13-1/2"		444			FC4-6100-B10X	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon steel per ASTM A36
- End Rings: Cold rolled carbon steel per AISI 1020
- Bolts and Nuts: Type 304 stainless steel per ASTM A193 and A194
- Coating: Black alkyd enamel shop coat - NSF61 approved
- Gasket: Extruded SBR rubber per ASTM D2000 M4AA810 with heat bonded joint
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/29/15

Submitted By: