



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-BxxY-U style)



14" - 60" STYLE FC4 COUPLINGS FOR JOINING DUCTILE IRON SIZE PIPES WITH THE SAME O.D.

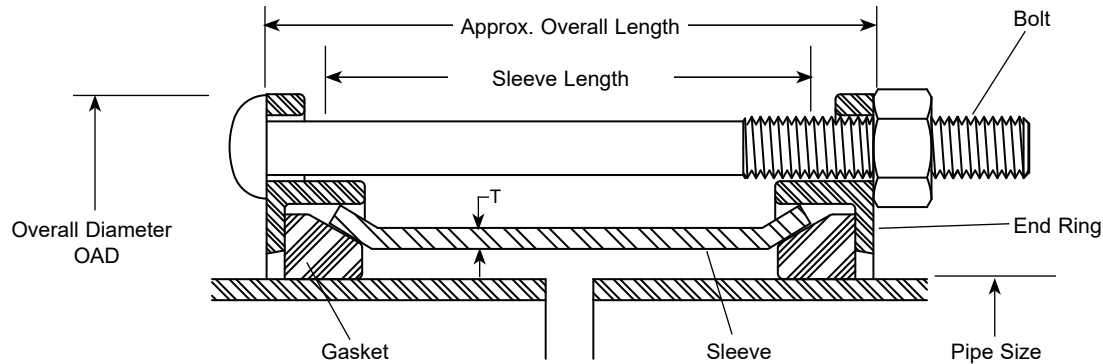

NOM. PIPE SIZE	PIPE O.D. (IN.)	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T)THICKNESS		DIA.	LGTH.	QTY.					
14"	15.30	7"	3/8"	8-1/8"	5/8"	10-1/2"	9	92	19-11/16"	592	FC4-1530-B07Y-U	
	15.30	10"		11-1/8"		13-1/2"		109			FC4-1530-B10Y-U	
16"	17.40	7"	3/8"	8-1/8"	5/8"	10-1/2"	10	103	22"	567	FC4-1740-B07Y-U	
	17.40	10"		11-1/8"		13-1/2"		122			FC4-1740-B10Y-U	
18"	19.50	7"	3/8"	8-1/8"	5/8"	10-1/2"	11	115	24-1/8"	512	FC4-1950-B07Y-U	
	19.50	10"		11-1/8"		13-1/2"		136			FC4-1950-B10Y-U	
20"	21.60	7"	3/8"	8-1/8"	5/8"	10-1/2"	12	125	25-1/4"	463	FC4-2160-B07Y-U	
	21.60	10"		11-1/8"		13-1/2"		148			FC4-2160-B10Y-U	
24"	25.80	7"	3/8"	8-1/8"	5/8"	10-1/2"	14	148	30-7/16"	392	FC4-2580-B07Y-U	
	25.80	10"		11-1/8"		13-1/2"		176			FC4-2580-B10Y-U	
30"	32.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	16	166	36-5/8"	343	FC4-3200-B07Y-U	
	32.00	10"		11-1/8"		13-1/2"		201			FC4-3200-B10Y-U	
36"	38.30	7"	3/8"	8-1/8"	5/8"	10-1/2"	18	226	42-11/16"	289	FC4-3830-B07Y-U	
	38.30	10"		11-1/8"		13-1/2"		267			FC4-3830-B10Y-U	
42"	44.50	7"	3/8"	8-1/8"	5/8"	10-1/2"	20	271	49-5/8"	250	FC4-4450-B07Y-U	
	44.50	10"		11-1/8"		13-1/2"		318			FC4-4450-B10Y-U	
48"	50.80	7"	3/8"	8-1/8"	5/8"	10-1/2"	22	309	55-15/16"	220	FC4-5080-B07Y-U	
	50.80	10"		11-1/8"		13-1/2"		363			FC4-5080-B10Y-U	
54"	57.56	7"	3/8"	8-1/8"	5/8"	10-1/2"	24	353	62-11/16"	200	FC4-5756-B07Y-U	
	57.56	10"		11-1/8"		13-1/2"		414			FC4-5756-B10Y-U	
60"	61.61	7"	3/8"	8-1/8"	5/8"	10-1/2"	26	382	66-3/4"	200	FC4-6161-B07Y-U	
	61.61	10"		11-1/8"		10-1/2"		447			FC4-6161-B10Y-U	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Carbon steel per ASTM A36
- End Rings - Cold rolled carbon steel per AISI 1020
- Bolts and Nuts - 304 stainless steel per ASTM A193 and A194
- Coating - NSF61 approved epoxy
- Gasket - Extruded SBR rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/24/20

Submitted By: