



SUBMITTAL INFORMATION

Fabricated Steel Transition Coupling - (FC5-xxxx-xxxx-A10R style)



STYLE FC5 COUPLINGS FOR JOINING PIPES WITH DIFFERENT O.D.'S

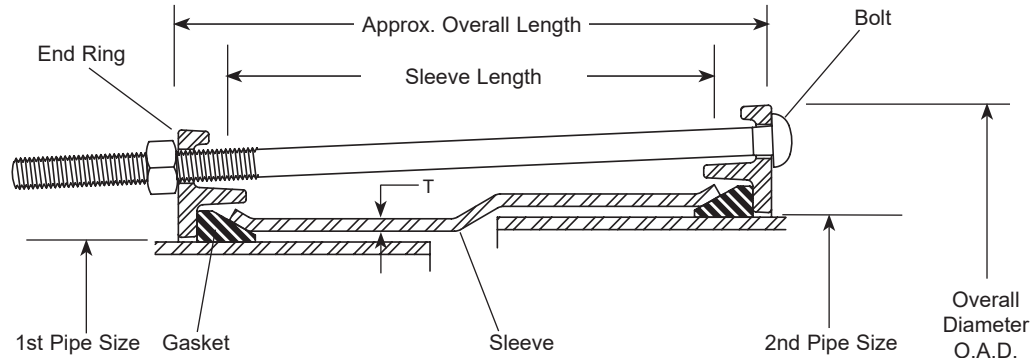

NOM. PIPE SIZE (IN.)	1ST END PIPE O.D. (IN.)	BY	2ND END PIPE O.D. (IN.)	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH. (IN.)	OAD (IN.)	APPROX. WT. LBS.	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
				(T)HICKNESS (IN.)	LGTH. (IN.)	DIA. (IN.)	LGTH. (IN.)	QTY.						
14	14.00		15.30	1/4	10	5/8	13-1/2	9	11-1/8	19-11/16	85	200	FC5-1400-1530-A10R	
	15.30		15.65							20-1/4	91	416	FC5-1530-1565-A10R	
	15.30		15.98							20-5/8	96	416	FC5-1530-1598-A10R	
	15.30		16.22							20-7/8	97	410	FC5-1530-1622-A10R	
16	16.00		17.40	1/4	10	5/8	13-1/2	10	11-1/8	22	96	200	FC5-1600-1740-A10R	
	17.40		17.80							22-7/16	102	372	FC5-1740-1780-A10R	
	17.40		17.94							22-9/16	107	372	FC5-1740-1794-A10R	
	17.40		18.16							22-13/16	107	372	FC5-1740-1816-A10R	
18	18.00		19.50	1/4	10	5/8	13-1/2	11	11-1/8	24-1/8	107	200	FC5-1800-1950-A10R	
	18.70		19.50							24-1/8	107	200	FC5-1870-1950-A10R	
	19.50		19.92							24-9/16	114	337	FC5-1950-1992-A10R	
20	20.00		21.60	1/4	10	5/8	13-1/2	12	11-1/8	25-1/4	116	200	FC5-2000-2160-A10R	
	21.60		22.06							26-11/16	124	313	FC5-2160-2206-A10R	
	21.60		22.50							27-1/8	124	313	FC5-2160-2250-A10R	
24	24.00		25.80	1/4	10	5/8	13-1/2	14	11-1/8	30-7/16	137	200	FC5-2400-2580-A10R	
	25.80		26.32							30-15/16	146	250	FC5-2580-2632-A10R	
	25.80		26.48							31-1/8	146	250	FC5-2580-2648-A10R	
30	30.00		32.00	1/4	10	5/8	13-1/2	16	11-1/8	36-5/8	157	200	FC5-3000-3200-A10R	
	31.74		32.00							36-5/8	165	230	FC5-3174-3200-A10R	
	32.00		32.40							37	166	230	FC5-3200-3240-A10R	
	32.00		32.74							37-3/8	166	230	FC5-3200-3274-A10R	
	32.00		33.73							38-1/2	175	230	FC5-3200-3373-A10R	
36	36.00		38.30	1/4	10	5/8	13-1/2	18	11-1/8	42-11/16	186	193	FC5-3600-3830-A10R	
	37.96		38.30							42-11/16	225	193	FC5-3796-3830-A10R	
	38.30		38.70							43-13/16	230	193	FC5-3830-3870-A10R	
	38.30		39.16							44-15/16	230	193	FC5-3830-3916-A10R	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Carbon steel per ASTM A36
- End Rings - Cold rolled carbon steel per AISI 1020
- Bolts and Nuts - High strength low alloy steel per ASTM A242 or AWWA C111
- Coating - Black alkyd enamel shop coat NSF61 certified
- Gasket - SBR rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/17/24

Submitted By: