



SUBMITTAL INFORMATION

Fabricated Steel Transition Coupling - (FC5-xxxx-xxxx-A24X



STYLE FC5 COUPLINGS FOR JOINING PIPES WITH DIFFERENT O.D.'S WITH 304 STAINLESS STEEL HARDWARE

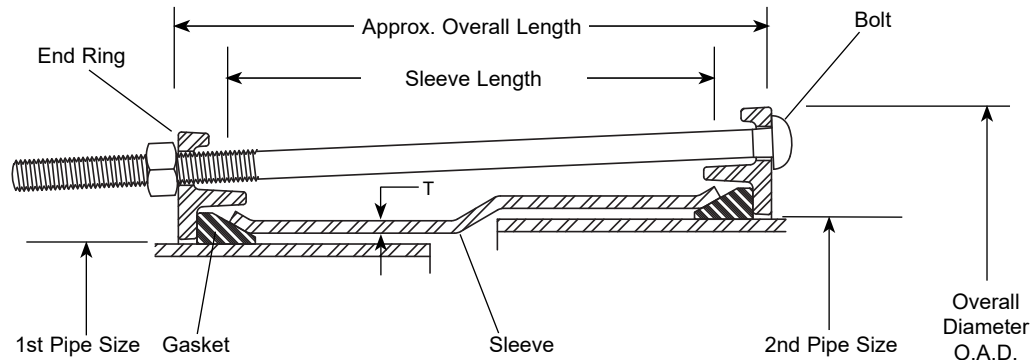

NOM. PIPE SIZE	1ST END PIPE O.D.	BY	2ND END PIPE O.D.	CENTER SLEEVE (T)HICKNESS	LGTH.	BOLTS			APPROX. OVERALL LGTH.		APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
14"	14.00		15.30	1/4"	24"	5/8"	27-1/2"	9	25-1/8"	19-11/16"	149	200	FC5-1400-1530-A24X	
	15.30		15.65							20-1/4"	157	416	FC5-1530-1565-A24X	
	15.30		15.98							20-5/8"	158	416	FC5-1530-1598-A24X	
	15.30		16.22							20-7/8"	159	410	FC5-1530-1622-A24X	
16"	16.00		17.40	1/4"		5/8"		10		22"	165	200	FC5-1600-1740-A24X	
	17.40		17.80							22-7/16"	178	372	FC5-1740-1780-A24X	
	17.40		17.94							22-9/16"	179	372	FC5-1740-1794-A24X	
	17.40		18.16							22-13/16"	179	372	FC5-1740-1816-A24X	
18"	18.00		19.50	1/4"		5/8"		11		24-1/8"	188	200	FC5-1800-1950-A24X	
	19.50		19.92							24-9/16"	197	337	FC5-1950-1992-A24X	
20"	20.00		21.60	1/4"		5/8"		12		25-1/4"	208	200	FC5-2000-2160-A24X	
	21.60		22.06							26-11/16"	219	313	FC5-2160-2206-A24X	
	21.60		22.50		27-1/8"		220		313	FC5-2160-2250-A24X				
24"	24.00		25.80	1/4"	5/8"	14	30-7/16"	253	200	FC5-2400-2580-A24X				
	25.80		26.32				30-15/16"	258	250	FC5-2580-2632-A24X				
	25.80		26.48				31-1/8"	259	250	FC5-2580-2648-A24X				
30"	30.00		32.00	1/4"	5/8"	16	36-5/8"	302	200	FC5-3000-3200-A24X				
	31.74		32.00				36-5/8"	311	230	FC5-3174-3200-A24X				
	32.00		32.40				37"	318	230	FC5-3200-3240-A24X				
	32.00		32.74				37-3/8"	318	230	FC5-3200-3274-A24X				
36"	36.00		38.30	1/4"	5/8"	18	42-11/16"	362	193	FC5-3600-3830-A24X				
	37.96		38.30				42-11/16"	377	193	FC5-3796-3830-A24X				
	38.30		38.70				43-13/16"	379	193	FC5-3830-3870-A24X				
	38.30		39.16				44-15/16"	381	193	FC5-3830-3916-A24X				

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon steel per ASTM A36
- End Rings: Cold rolled carbon steel per AISI 1020
- Bolts and Nuts: 18-8 Type 304 stainless steel per ASTM A193 and A194
- Coating: Black alkyd enamel shop coat - NSF61 Approved
- Gasket: Extruded SBR rubber per ASTM D2000
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

01/24/19

Submitted By: