



SUBMITTAL INFORMATION

Steel Reducing Coupling - (FC6-xxxx-xxxx-R style)



FC6 COUPLING FOR JOINING PIPES WITH DIFFERENT O.D.'S

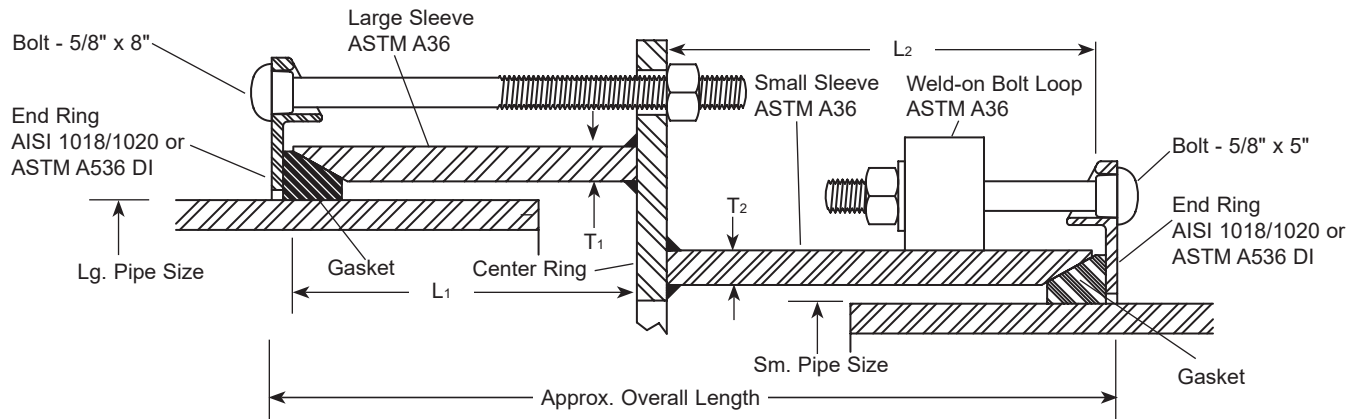

NOM PIPE SIZE (IN.)	LARGE END				BY	NOM PIPE SIZE (IN.)	SMALL END				APPROX. OVERALL LENGTH (IN.)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	GASKET RANGE (IN.)	LENGTH L1 (IN.)	BOLT QTY.	DIM T1			GASKET RANGE (IN.)	LENGTH L2 (IN.)	BOLT QTY.	DIM T2			
12	13.69-14.04	5	7	1/4" or 3/8"		10	10.00	5	6	1/4" or 3/8"	13-1/2	FC6-1404-1000-R	
							10.75					FC6-1404-1075-R	
							11.10-11.46	7				FC6-1404-1146-R	
							11.42-11.77					FC6-1404-1177-R	
							11.77-12.12					FC6-1404-1212-R	
	15.30-15.70	9	9	1/4" or 3/8"		12	12.00	5	7	1/4" or 3/8"	13-1/2	FC6-1570-1200-R	
							12.70					FC6-1570-1275-R	
							13.20-13.56	7				FC6-1570-1356-R	
							13.69-14.04					FC6-1570-1404-R	
							14.04-14.38					FC6-1570-1438-R	
14	16.00-16.35	5	9	1/4" or 3/8"		10	10.00	5	6	1/4" or 3/8"	13-1/2	FC6-1635-1000-R	
							10.75					FC6-1635-1075-R	
							11.10-11.46	7				FC6-1635-1146-R	
							11.42-11.77					FC6-1635-1177-R	
							11.77-12.12					FC6-1635-1212-R	
	16.40-16.88	5	9	1/4" or 3/8"		12	12.00	5	7	1/4" or 3/8"	13-1/2	FC6-1635-1200-R	
							12.75					FC6-1688-1200-R	
							13.20-13.56	7				FC6-1635-1275-R	
							13.69-14.04					FC6-1688-1275-R	
							14.04-14.38					FC6-1635-1356-R	
												FC6-1688-1356-R	
												FC6-1635-1404-R	
												FC6-1688-1404-R	
												FC6-1635-1438-R	
												FC6-1688-1438-R	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeves - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Rings - Ductile iron per ASTM A536 or carbon steel per AISI 1018/1020
- Bolts and Nuts - High strength, low alloy steel per ASTM A242 or AWWA C111
- Gasket - SBR rubber per ASTM D2000
- Finish - Shop coat
- Complies with AWWA C219 standards
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/09/24

Submitted By: