



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxB style)



FCA COUPLING FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

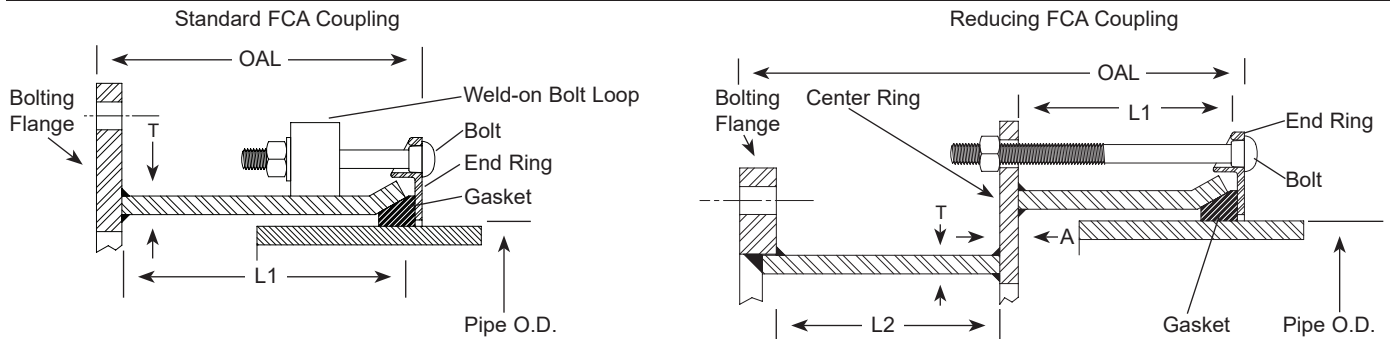

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FLG SIZE	END RING BOLTS	DIMENSION	SLEEVE LGTH	APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
14"	13.69 - 14.04	12"	8"	7	3/8"	5"	107	175	FCA-1404-D12B	
	13.69 - 14.04	14"	8"		3/8"	5"	128	150	FCA-1404-D14B	
	15.30 - 15.70	10"	8"	9	3/8"	5"	133	175	FCA-1570-D10B	
	15.30 - 15.70	12"	8"		3/8"	5"	114	175	FCA-1570-D12B	
	15.30	14"	5"		n/a	10"	108	150	FCA-1530-D14B	
	15.70	14"	5"		n/a	10"	114	150	FCA-1570-D14B	
16"	16.00 - 16.35	14"	8"	10	1/2"	5"	166	150	FCA-1635-D14B	
	16.00	16"	5"		n/a	10"	128	150	FCA-1600-D16B	
	17.40 - 17.80	12"	8"		1/2"	5"	152	175	FCA-1780-D12B	
	17.40	16"	5"		n/a	10"	134	150	FCA-1740-D16B	
	17.80	16"	5"		n/a	10"	135	150	FCA-1780-D16B	
18"	18.00	18"	5"	11	n/a	10"	136	150	FCA-1800-D18B	
	19.50 - 20.00	14"	8"		5/8"	5"	153		FCA-2000-D14B	
	19.50 - 20.00	16"	8"		5/8"	5"	210		FCA-2000-D16B	
	19.50	18"	5"		n/a	10"	140		FCA-1950-D18B	
	19.50 - 20.00	18"	8"		5/8"	5"	192		FCA-2000-D18B	
20"	20.00	20"	5"	12	n/a	10"	160	150	FCA-2000-D20B	
	21.60 - 22.06	16"	8"		5/8"	5"	200		FCA-2206-D16B	
	21.60 - 22.06	18"	8"		5/8"	5"	180		FCA-2206-D18B	
	21.60	20"	5"		n/a	10"	164		FCA-2160-D20B	
	22.06	20"	5"		n/a	10"	169		FCA-2206-D20B	
	24.00	20"	*5"		7/8"	5"	300		FCA-2400-D20B	
24"	24.00	24"	5"	14	n/a	10"	204	150	FCA-2400-D24B	
	24.00	28"	*5"		7/8"	5"	-		FCA-2400-D28B	
	25.80	20"	*5"		7/8"	5"	250		FCA-2580-D20B	
	25.80	24"	5"		n/a	10"	209		FCA-2580-D24B	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and ASTM A194
- Flange - Class D AWWA C207
- Gasket - EPDM rubber per ASTM D2000
- Finish - Fusion bonded epoxy

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

01/18/24

Submitted By: