



# SUBMITTAL INFORMATION

## Adapter Flanges - (FCA-xxxx-DxxD-R24B style)



### RESTRAINED FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS WITH TYPE 316 STAINLESS STEEL HARDWARE, EPDM GASKETS AND EPOXY COATING

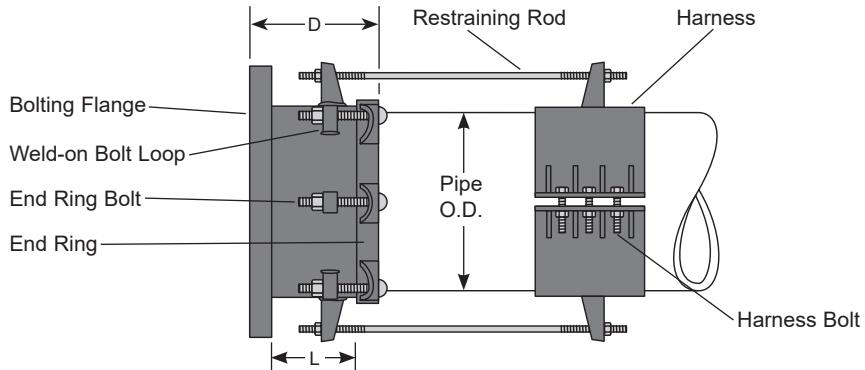

**FCA Coupling with Restrainer Lug and Harness Assembly**

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FIG. SIZE	END RING BOLTS			RESTRAINING RODS			HARNESS CLAMPING BOLTS			SLEEVE THICKNESS		L	D	APPROX. WT. (LBS.)	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER
			dia.	lgth.	qty.	dia.	lgth.	qty.	dia.	lgth.	qty.	fca	harness					
10"	10.75	10"	5/8"	5"	6	3/4"	24"	4	1"	7"	6	1/4"	3/8"	15"	17"	170	200	FCA-1075-D10D-R24B
12"	12.75	12"	5/8"	5"	7	3/4"	24"	4	1"	7"	6	1/4"	3/8"	15"	17"	220	150	FCA-1275-D12D-R24B

### FEATURES

- Sleeve - Carbon steel per ASTM A36
- Harness - Carbon steel per ASTM A36
- End Rings - Carbon steel per ASTM A36
- Flange - Class D AWWA C207
- Bolts, Nuts and Restraining Rods - Type 316 stainless steel per A193 and A194
- Gasket - EPDM rubber per ASTM D2000
- Finish - Fusion bonded epoxy - NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By: