



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxE-BBN style)



14" - 24" STYLE FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS WITH EPOXY COATING AND BLUE FLUOROCARBON-COATED HARDWARE

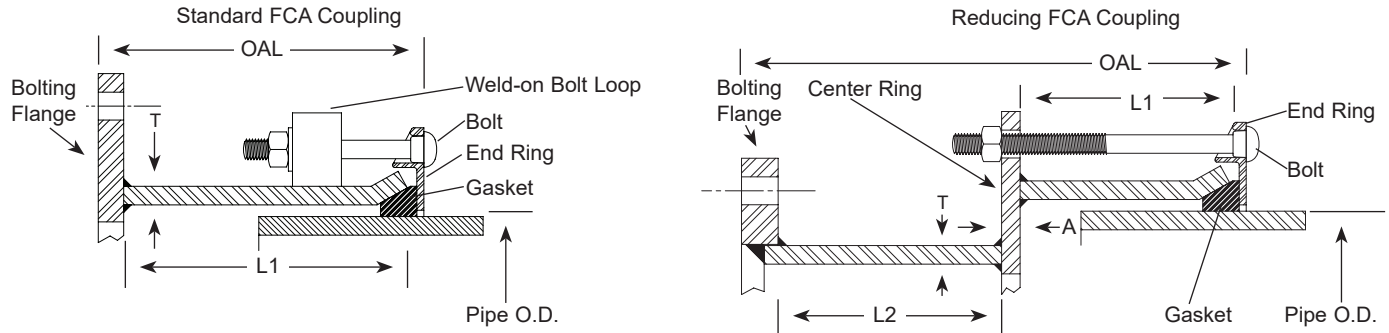

NOM. PIPE SIZE	COUPLING GASKET RANGE	FLG SIZE	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.	A	T	L1	L2					
14"	13.69 - 14.04	12"	5/8"	8"	7	3/8"	1/4"	5"	7"	13-7/8"	107	175	FCA-1404-D12E-BBN	
	13.69 - 14.04	14"		8"	3/8"	5"		7"	13-7/8"	128	150	FCA-1404-D14E-BBN		
	15.30 - 15.70	10"		8"	3/8"	5"		7"	13-7/8"	133	175	FCA-1570-D10E-BBN		
	15.30 - 15.70	12"		8"	3/8"	5"		7"	13-7/8"	-	175	FCA-1570-D12E-BBN		
	15.30	14"		5"	n/a	10"		n/a	11-1/2"	108	150	FCA-1530-D14E-BBN		
	15.70	14"		5"	n/a	10"		n/a	11-1/2"	114	150	FCA-1570-D14E-BBN		
16"	16.00 - 16.35	14"	5/8"	8"	10	1/2"	1/4"	5"	7"	14-1/8"	166	150	FCA-1635-D14E-BBN	
	16.00	16"		5"		n/a		10"	n/a	11-1/2"	128	150	FCA-1600-D16E-BBN	
	17.40 - 17.80	12"		8"		1/2"		5"	7"	14-1/8"	152	175	FCA-1780-D12E-BBN	
	17.40	16"		5"		n/a		10"	n/a	11-1/2"	134	150	FCA-1740-D16E-BBN	
	17.80	16"		5"		n/a		10"	n/a	11-1/2"	135	150	FCA-1780-D16E-BBN	
	18.00	18"		5"		n/a		10"	n/a	11-5/8"	136	150	FCA-1800-D18E-BBN	
19.50 - 20.00	14"	8"	5/8"	5"	7"	14-1/4"	153	FCA-2000-D14E-BBN						
19.50 - 20.00	16"	8"	5/8"	5"	7"	14-1/4"	-	FCA-2000-D16E-BBN						
19.50	18"	5"	n/a	10"	n/a	11-5/8"	140	FCA-1950-D18E-BBN						
20"	19.50 - 20.00	18"	5/8"	8"	12	5/8"	1/4"	5"	7"	14-3/8"	192	150	FCA-2000-D18E-BBN	
	20.00	20"		5"		n/a		10"	n/a	11-3/4"	160		FCA-2000-D20E-BBN	
	21.60 - 22.06	16"		8"		5/8"		5"	7"	14-3/8"	200		FCA-2206-D16E-BBN	
	21.60 - 22.06	18"		8"		5/8"		5"	7"	14-3/8"	-		FCA-2206-D18E-BBN	
	21.60	20"		5"		n/a		10"	n/a	11-3/4"	164		FCA-2160-D20E-BBN	
	22.06	20"		5"		n/a		10"	n/a	11-3/4"	169		FCA-2206-D20E-BBN	
24"	24.00	20"	5/8"	*5"	14	7/8"	1/4"	5"	7"	14-3/4"	-	150	FCA-2400-D20E-BBN	
	24.00	24"		5"		n/a		10"	n/a	11-7/8"	204		FCA-2400-D24E-BBN	
	25.80	20"		*5"		7/8"		5"	7"	14-3/4"	-		FCA-2580-D20E-BBN	
	25.80	24"		5"		n/a		10"	n/a	11-7/8"	209		FCA-2580-D24E-BBN	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - High strength, low alloy steel per ASTM A242 or AWWA C111 with blue fluorocarbon coating
- Flange - Class D AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Fusion-bonded epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

01/31/22

Submitted By: