



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxE style)



FCA COUPLING FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

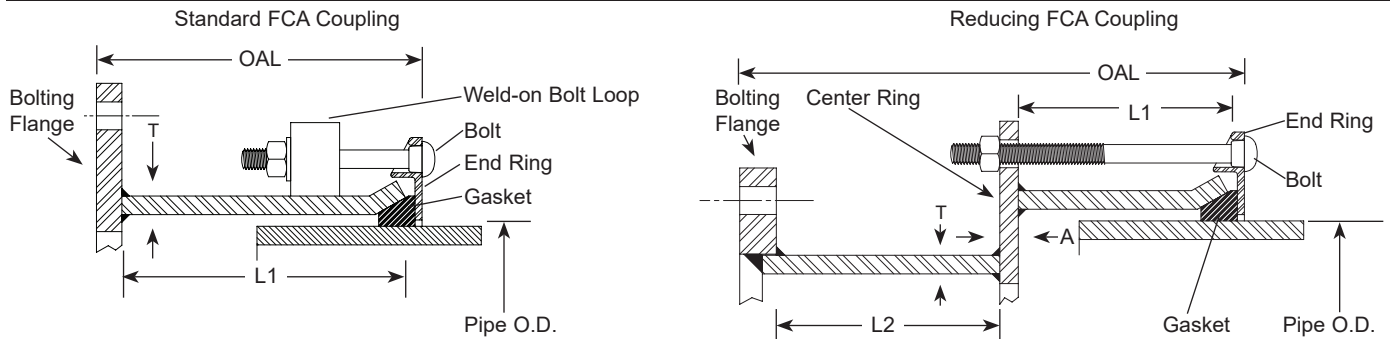

NOM. PIPE SIZE (IN.)	COUPLING GASKET RANGE	FLANGE SIZE (IN.)	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH (IN.)	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA. (IN.)	LENGTH (IN.)	QTY.	A (IN.)	T (IN.)	L1 (IN.)	L2 (IN.)					
14	13.69 - 14.04	12	5/8	8	7	3/8	1/4	5	7	13-7/8	107	175	FCA-1404-D12E	
	13.69 - 14.04	14		8		3/8		5	7	13-7/8	128	150	FCA-1404-D14E	
	15.30 - 15.70	10		8	9	3/8		5	7	13-7/8	133	175	FCA-1570-D10E	
	15.30 - 15.70	12		8		3/8		5	7	13-7/8	-	175	FCA-1570-D12E	
	15.30	14		5		n/a		10	n/a	11-1/2	108	150	FCA-1530-D14E	
	15.70	14		5		n/a		10	n/a	11-1/2	114	150	FCA-1570-D14E	
16	16.00 - 16.35	14	5/8	8	10	1/2	1/4	5	7	14-1/8	166	150	FCA-1635-D14E	
	16.00	16		5		n/a		10	n/a	11-1/2	128	150	FCA-1600-D16E	
	17.40 - 17.80	12		8		1/2		5	7	14-1/8	152	175	FCA-1780-D12E	
	17.40	16		5		n/a		10	n/a	11-1/2	134	150	FCA-1740-D16E	
	17.80	16		5		n/a		10	n/a	11-1/2	135	150	FCA-1780-D16E	
	18.00	18		5		n/a		10	n/a	11-5/8	136		FCA-1800-D18E	
18	19.50 - 20.00	14	5/8	8	11	5/8	1/4	5	7	14-1/4	153	150	FCA-2000-D14E	
	19.50 - 20.00	16		8		5/8		5	7	14-1/4	-		FCA-2000-D16E	
	19.50	18		5		n/a		10	n/a	11-5/8	140		FCA-1950-D18E	
	19.50 - 20.00	18		8		5/8		5	7	14-3/8	192		FCA-2000-D18E	
20	20.00	20	5/8	5	12	n/a	1/4	10	n/a	11-3/4	160	150	FCA-2000-D20E	
	21.60 - 22.06	16		8		5/8		5	7	14-3/8	200		FCA-2206-D16E	
	21.60 - 22.06	18		8		5/8		5	7	14-3/8	-		FCA-2206-D18E	
	21.60	20		5		n/a		10	n/a	11-3/4	164		FCA-2160-D20E	
	22.06	20		5		n/a		10	n/a	11-3/4	169		FCA-2206-D20E	
	24.00	20		*5		7/8		5	7	14-3/4	-		FCA-2400-D20E	
24	24.00	24	5/8	5	14	n/a	1/4	10	n/a	11-7/8	204	150	FCA-2400-D24E	
	25.80	20		*5		7/8		5	7	14-3/4	-		FCA-2580-D20E	
	25.80	24		5		n/a		10	n/a	11-7/8	209		FCA-2580-D24E	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - High strength, low alloy steel per ASTM A242 or AWWA C111
- Flange - Class D AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Fusion bonded epoxy coating
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/08/25

Submitted By: