



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxP style)



14" - 24" STYLE FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

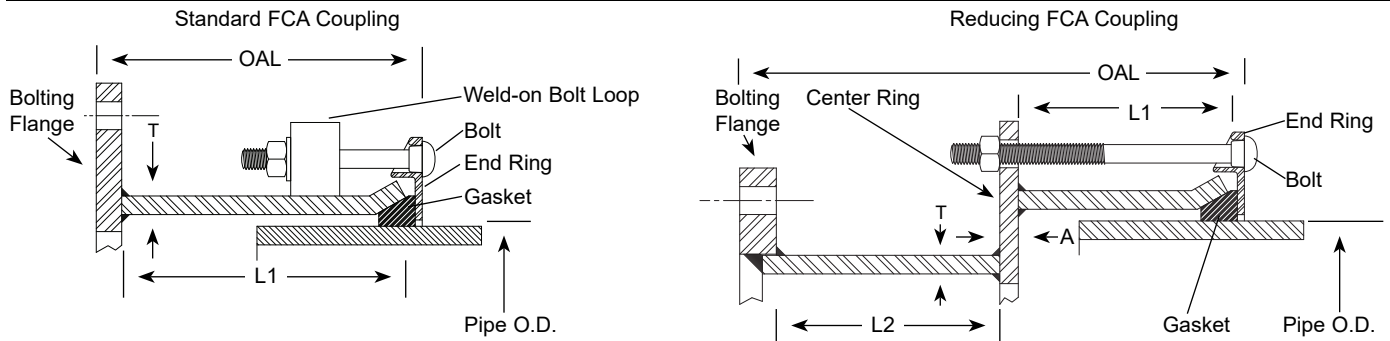

NOM. PIPE SIZE	COUPLING GASKET RANGE	FLG SIZE	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.	A	T	L1	L2					
14"	13.69 - 14.04	12"	5/8"	8"	7	3/8"	1/4"	5"	7"	13-7/8"	107	175	FCA-1404-D12P	
	15.30 - 15.70	10"		8"	9	3/8"		5"	7"	13-7/8"	133	175	FCA-1570-D10P	
	15.30 - 15.70	12"		8"		3/8"		5"	7"	13-7/8"	-	175	FCA-1570-D12P	
	15.30 - 15.70	14"		5"		n/a		10"	n/a	11-1/2"	114	150	FCA-1570-D14P	
	15.30	14"		5"		n/a		10"	n/a	11-1/2"	108	150	FCA-1530-D14P	
16"	16.00 - 16.35	14"	5/8"	8"	10	1/2"	1/4"	5"	7"	14-1/8"	166	150	FCA-1635-D14P	
	16.00	16"		5"		n/a		10"	n/a	11-1/2"	128	150	FCA-1600-D16P	
	17.40 - 17.80	12"		8"		1/2"		5"	7"	14-1/8"	152	175	FCA-1780-D12P	
	17.40	16"		5"		n/a		10"	n/a	11-1/2"	134	150	FCA-1740-D16P	
	17.80	16"		5"		n/a		10"	n/a	11-1/2"	135	150	FCA-1780-D16P	
18"	18.00	18"	5/8"	5"	11	n/a	1/4"	10"	n/a	11-5/8"	136	150	FCA-1800-D18P	
	19.50 - 20.00	14"		8"		5/8"		5"	7"	14-1/4"	153		FCA-2000-D14P	
	19.50 - 20.00	16"		8"		5/8"		5"	7"	14-1/4"	-		FCA-2000-D16P	
	19.50	18"		5"		n/a		10"	n/a	11-5/8"	140		FCA-1950-D18P	
	19.50 - 20.00	18"		8"		5/8"		5"	7"	14-3/8"	192		FCA-2000-D18P	
20"	20.00	20"	5/8"	5"	12	n/a	1/4"	10"	n/a	11-3/4"	160	150	FCA-2000-D20P	
	21.60 - 22.06	16"		8"		5/8"		5"	7"	14-3/8"	200		FCA-2206-D16P	
	21.60 - 22.06	18"		8"		5/8"		5"	7"	14-3/8"	-		FCA-2206-D18P	
	21.60 - 22.06	20"		5"		n/a		10"	n/a	11-3/4"	169		FCA-2206-D20P	
	21.60	20"		5"		n/a		10"	n/a	11-3/4"	164		FCA-2160-D20P	
24"	24.00	20"	5/8"	*5"	14	7/8"	1/4"	5"	7"	14-3/4"	-	150	FCA-2400-D20P	
	24.00	24"		5"		n/a		10"	n/a	11-7/8"	204		FCA-2400-D24P	
	25.80	20"		*5"		7/8"		5"	7"	14-3/4"	-		FCA-2580-D20P	
	25.80	24"		5"		n/a		10"	n/a	11-7/8"	209		FCA-2580-D24P	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve: Carbon steel per ASTM A36
- Center Ring: Carbon steel per ASTM A36
- End Ring: Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts: Type 304 stainless steel per ASTM A193 and A194
- Flange: Class D AWWA C207
- Gasket: Extruded NBR (Buna-N) rubber per ASTM D2000
- Finish: Fusion bonded epoxy per AWWA C213

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/12/17

Submitted By: