




SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxY style)

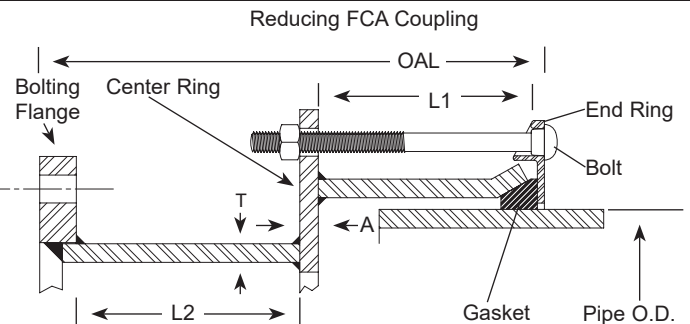

FCA COUPLING FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

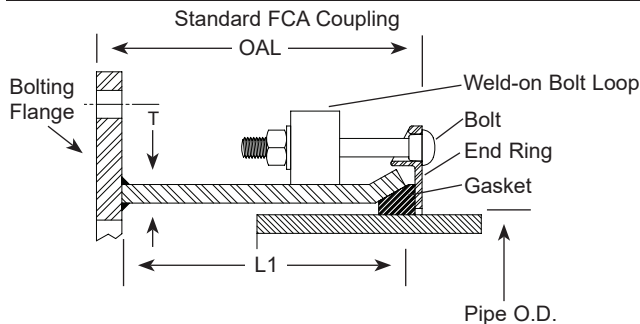

NOM. PIPE SIZE (IN.)	COUPLING GASKET RANGE (IN.)	FLG SIZE (IN.)	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH (IN.)	APPROX. WT. LBS.	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA. (IN.)	LGTH. (IN.)	QTY.	A (IN.)	T (IN.)	L1 (IN.)	L2 (IN.)					
14	13.69 - 14.04	12	5/8	8	7	3/8	1/4	5	7	13-7/8	107	175	FCA-1404-D12Y	
	13.69 - 14.04	14		8		3/8		5	7	13-7/8	128	150	FCA-1404-D14Y	
	15.30 - 15.70	10		8		3/8		5	7	13-7/8	133	175	FCA-1570-D10Y	
	15.30 - 15.70	12		8		3/8		5	7	13-7/8	114	175	FCA-1570-D12Y	
	15.30	14		5		n/a		10	n/a	11-1/2	108	150	FCA-1530-D14Y	
	15.70	14		5		n/a		10	n/a	11-1/2	114	150	FCA-1570-D14Y	
16	16.00 - 16.35	14	5/8	8	10	1/2	1/4	5	7	14-1/8	166	150	FCA-1635-D14Y	
	16.00	16		5		n/a		10	n/a	11-1/2	128	150	FCA-1600-D16Y	
	17.40 - 17.80	12		8		1/2		5	7	14-1/8	152	175	FCA-1780-D12Y	
	17.40	16		5		n/a		10	n/a	11-1/2	134	150	FCA-1740-D16Y	
	17.80	16		5		n/a		10	n/a	11-1/2	135	150	FCA-1780-D16Y	
	18.00	16		8		5/8		5	7	14-1/4	168		FCA-1800-D16Y	
18	18.00	18	5/8	5	11	n/a	1/4	10	n/a	11-5/8	136		FCA-1800-D18Y	
	19.50 - 20.00	14		8		5/8		5	7	14-1/4	153	150	FCA-2000-D14Y	
	19.50 - 20.00	16		8		5/8		5	7	14-1/4	210		FCA-2000-D16Y	
	19.50	18		5		n/a		10	n/a	11-5/8	140		FCA-1950-D18Y	
	19.50 - 20.00	18		8		5/8		5	7	14-3/8	192		FCA-2000-D18Y	
	20.00	20		5		n/a		10	n/a	11-3/4	160		FCA-2000-D20Y	
20	21.60 - 22.06	16	5/8	8	12	5/8	1/4	5	7	14-3/8	200	150	FCA-2206-D16Y	
	21.60 - 22.06	18		8		5/8		5	7	14-3/8	180		FCA-2206-D18Y	
	21.60	20		5		n/a		10	n/a	11-3/4	164		FCA-2160-D20Y	
	22.06	20		5		n/a		10	n/a	11-3/4	169		FCA-2206-D20Y	
	24.00	20"		*5"		7/8"		5"	7"	14-3/4"	300		FCA-2400-D20Y	
	24.00	24"		*5"		n/a		10"	n/a	11-7/8"	204		FCA-2400-D24Y	
24"	24.00	28"	5/8	*5"	14	7/8"	1/4"	5"	7"	14-3/4"	-	150	FCA-2400-D28Y	
	25.80	20"		*5"		7/8"		5"	7"	14-3/4"	250		FCA-2580-D20Y	
	25.80	24"		5"		n/a		10"	n/a	11-7/8"	209		FCA-2580-D24Y	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and ASTM A194
- Flange - Class D AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Fusion bonded epoxy
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/07/24

Submitted By: