



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxZ-U100 style)



14" - 24" STYLE FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

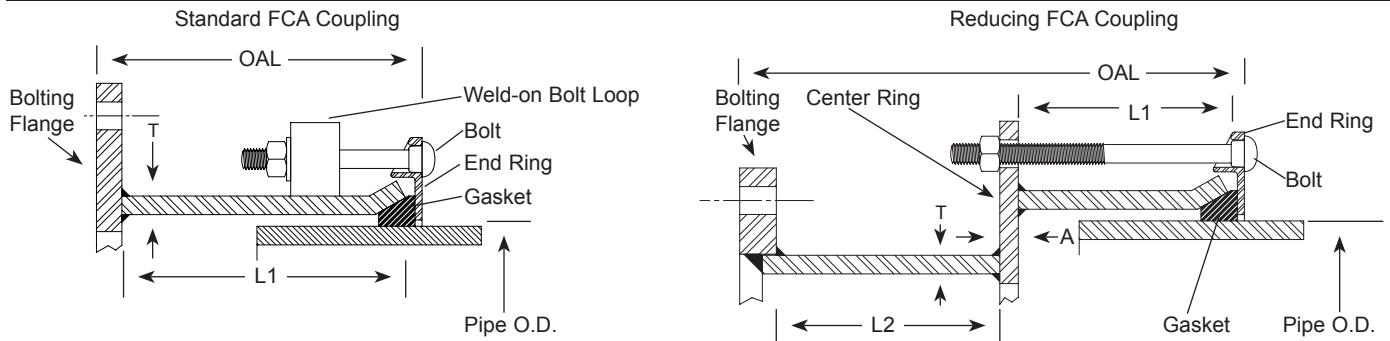

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FLG SIZE	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.	A	T	L1	L2					
14"	13.69 - 14.04	12"	5/8"	8"	7	3/8"	1/4"	5"	7"	13-7/8"	107	175	FCA-1404-D12Z-U100	
	13.69 - 14.04	14"		5"		n/a		10"	n/a	11-1/2"	110	175	FCA-1404-D14Z-U100	
	15.30 - 15.70	10"		8"		3/8"		5"	7"	13-7/8"	133	175	FCA-1570-D10Z-U100	
	15.30 - 15.70	12"		8"	9	3/8"		5"	7"	13-7/8"	-	175	FCA-1570-D12Z-U100	
	15.30	14"		5"		n/a		10"	n/a	11-1/2"	108	150	FCA-1530-D14Z-U100	
	15.70	14"		5"		n/a		10"	n/a	11-1/2"	114	150	FCA-1570-D14Z-U100	
16"	16.00 - 16.35	14"	5/8"	8"	10	1/2"	1/4"	5"	7"	14-1/8"	166	150	FCA-1635-D14Z-U100	
	16.00	16"		5"		n/a		10"	n/a	11-1/2"	128	150	FCA-1600-D16Z-U100	
	17.40 - 17.80	12"		8"		1/2"		5"	7"	14-1/8"	152	175	FCA-1780-D12Z-U100	
	17.40	16"		5"		n/a		10"	n/a	11-1/2"	134	150	FCA-1740-D16Z-U100	
	17.80	16"		5"		n/a		10"	n/a	11-1/2"	135	150	FCA-1780-D16Z-U100	
	18.00	18"		5"		n/a		10"	n/a	11-5/8"	136		FCA-1800-D18Z-U100	
18"	19.50 - 20.00	14"	5/8"	8"	11	5/8"	1/4"	5"	7"	14-1/4"	153	150	FCA-2000-D14Z-U100	
	19.50 - 20.00	16"		8"		5/8"		5"	7"	14-1/4"	-		FCA-2000-D16Z-U100	
	19.50	18"		5"		n/a		10"	n/a	11-5/8"	140		FCA-1950-D18Z-U100	
	19.50 - 20.00	18"		8"		5/8"		5"	7"	14-3/8"	192		FCA-2000-D18Z-U100	
	20.00	20"		5"		n/a		10"	n/a	11-3/4"	160		FCA-2000-D20Z-U100	
	21.60 - 22.06	16"		8"	12	5/8"	1/4"	5"	7"	14-3/8"	200	150	FCA-2206-D16Z-U100	
20"	21.60 - 22.06	18"	5/8"	8"		5/8"		5"	7"	14-3/8"	-		FCA-2206-D18Z-U100	
	21.60	20"		5"		n/a		10"	n/a	11-3/4"	164		FCA-2160-D20Z-U100	
	22.06	20"		5"		n/a		10"	n/a	11-3/4"	169		FCA-2206-D20Z-U100	
	24.00	20"		*5"	14	7/8"	1/4"	5"	7"	14-3/4"	-	150	FCA-2400-D20Z-U100	
	24.00	24"		5"		n/a		10"	n/a	11-7/8"	204		FCA-2400-D24Z-U100	
	25.80	20"		*5"		7/8"		5"	7"	14-3/4"	-		FCA-2580-D20Z-U100	
	25.80	24"		5"		n/a		10"	n/a	11-7/8"	209		FCA-2580-D24Z-U100	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - 316 stainless steel per ASTM A193 and A194
- Flange - Class D AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Fusion-bonded epoxy per AWWA C213
- 100% manufactured in the United State of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/18/21

Submitted By: