




SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-DxxZ style)

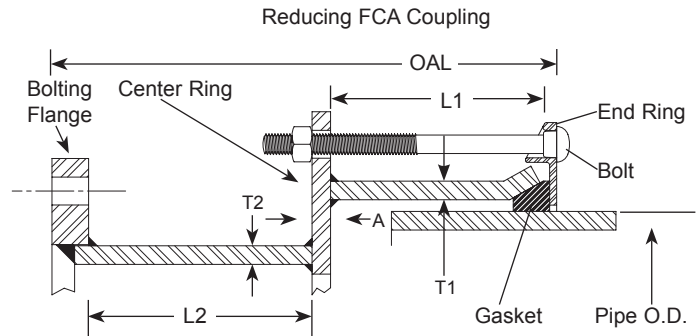

3" - 12" STYLE FCA COUPLINGS (WITH EPOXY COATING AND 316 STAINLESS STEEL HARDWARE) FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

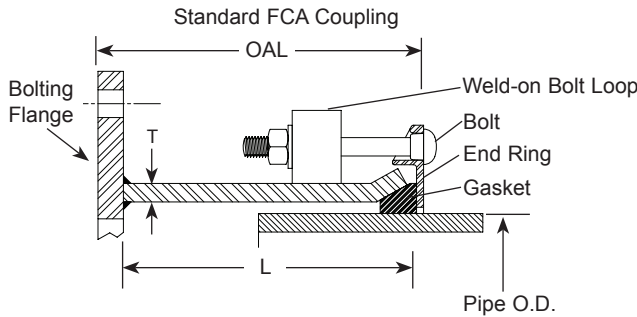

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FLG. SIZE	END RING BOLTS			DIMENSION			SLEEVE LGTH		APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.	A	T / T2	T1	L / L1	L2					
3"	3.70 - 3.88	3"	5/8"	5"	3	n/a	3/8"	n/a	*7"	n/a	8-1/2"	21	175	FCA-380-D3Z	
	3.80 - 3.96					n/a		n/a	*7"	n/a	8-1/2"	21	175	FCA-396-D3Z	
4"	4.00	4"	5/8"	5"	3	n/a	3/8"	n/a	*7"	n/a	8-1/2"	27	175	FCA-400-D4Z	
	4.50 - 4.80					n/a		n/a	*7"	n/a	8-1/2"	27	175	FCA-480-D4Z	
6"	6.00	4"	5/8"	8"	4	1/4"	3/8"	3/16"	5"	7"	13-1/2"	40	175	FCA-600-D4Z	
	6.00	6"		5"		n/a		n/a	*7"	n/a	8-1/2"	37		FCA-600-D6Z	
	6.30	4"		8"		1/4"		3/16"	5"	7"	13-1/2"	40		FCA-630-D4Z	
	6.30	6"		5"		n/a		n/a	*7"	n/a	8-1/2"	38		FCA-630-D6Z	
	6.63 - 6.90	4"		8"		1/4"		3/16"	5"	7"	13-1/2"	41		FCA-690-D4Z	
	6.63 - 6.90	6"		5"		n/a		n/a	*7"	n/a	8-1/2"	36		FCA-690-D6Z	
8"	8.00	6"	5/8"	8"	5	1/4"	1/4"	3/16"	5"	7"	13-1/2"	48	175	FCA-800-D6Z	
	8.00	8"		5"		n/a		n/a	10"	n/a	11-1/2"	49		FCA-800-D8Z	
	8.63 - 9.05	4"		8"		1/4"		3/16"	5"	7"	13-1/2"	46		FCA-905-D4Z	
	8.63 - 9.05	6"		8"		1/4"		3/16"	5"	7"	13-1/2"	50		FCA-905-D6Z	
	8.63 - 9.05	8"		5"		n/a		n/a	10"	n/a	11-1/2"	47		FCA-905-D8Z	
10"	10.00	10"	5/8"	5"	6	n/a	1/4"	n/a	10"	n/a	11-1/2"	65	175	FCA-1000-D10Z	
	10.75	10"		5"		n/a		n/a	10"	n/a	11-1/2"	61		FCA-1075-D10Z	
	11.10 - 11.46	8"		8"		1/4"		3/16"	5"	7"	13-1/2"	70		FCA-1146-D8Z	
	11.10 - 11.46	10"		5"		n/a		n/a	10"	n/a	11-1/2"	59		FCA-1146-D10Z	
12"	12.00	12"	5/8"	5"	6	n/a	1/4"	n/a	10"	n/a	11-1/2"	79	175	FCA-1200-D12Z	
	12.75	12"		5"		n/a		n/a	10"	n/a	11-1/2"	87		FCA-1275-D12Z	
	13.20 - 13.56	10"		8"		1/4"		1/4"	5"	7"	13-1/2"	90		FCA-1356-D10Z	
	13.20 - 13.56	12"		5"		n/a		n/a	10"	n/a	11-1/2"	81		FCA-1356-D12Z	

Note: Flexible couplings do not restrain axial forces on piping.

*1/4" thick sleeve reducer used to attach sleeve to flange

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Rings - Ductile iron per ASTM A536
- Flange - Class D AWWA C207
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194
- Gasket - SBR rubber per ASTM D2000
- Finish - Fusion-bonded epoxy - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/27/21

Submitted By: