



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-ExxE style)



14" - 24" STYLE FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

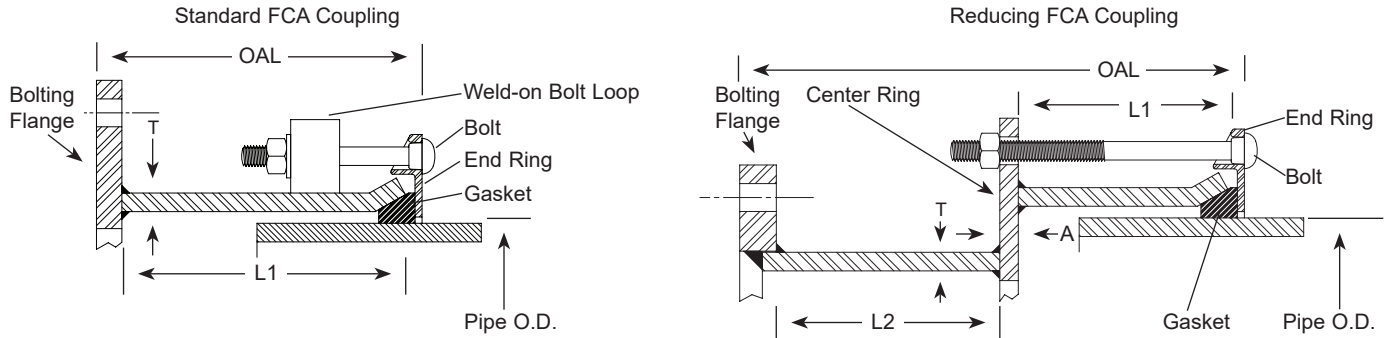

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FLG SIZE	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.	A	T	L1	L2					
14"	13.69 - 14.04	12"	5/8"	8"	7	3/8"	1/4"	5"	7"	13-7/8"	107	175	FCA-1404-E12E	
	13.69 - 14.04	14"		8"		3/8"		5"	7"	13-7/8"	128	150	FCA-1404-E14E	
	15.30 - 15.70	10"		8"		3/8"		5"	7"	13-7/8"	133	175	FCA-1570-E10E	
	15.30 - 15.70	12"		8"	9	3/8"		5"	7"	13-7/8"	135	175	FCA-1570-E12E	
	15.30	14"		5"		n/a		10"	n/a	11-1/2"	108	150	FCA-1530-E14E	
16"	15.70	14"	5/8"	5"		n/a	1/4"	10"	n/a	11-1/2"	114	150	FCA-1570-E14E	
	16.00 - 16.35	14"		8"		1/2"		5"	7"	14-1/8"	166	150	FCA-1635-E14E	
	16.00	16"		5"		n/a		10"	n/a	11-1/2"	128	150	FCA-1600-E16E	
	17.40 - 17.80	12"		8"	10	1/2"		5"	7"	14-1/8"	152	175	FCA-1780-E12E	
	17.40	16"		5"		n/a		10"	n/a	11-1/2"	134	150	FCA-1740-E16E	
18"	17.80	16"	5/8"	5"		n/a	1/4"	10"	n/a	11-1/2"	135	150	FCA-1780-E16E	
	18.00	18"		5"		n/a		10"	n/a	11-5/8"	136	150	FCA-1800-E18E	
	19.50 - 20.00	14"		8"		5/8"		5"	7"	14-1/4"	153	150	FCA-2000-E14E	
	19.50 - 20.00	16"		8"	11	5/8"		5"	7"	14-1/4"	210	150	FCA-2000-E16E	
	19.50	18"		5"		n/a		10"	n/a	11-5/8"	140	150	FCA-1950-E18E	
20"	19.50 - 20.00	18"	5/8"	8"		5/8"	1/4"	5"	7"	14-3/8"	192	150	FCA-2000-E18E	
	20.00	20"		5"		n/a		10"	n/a	11-3/4"	160	150	FCA-2000-E20E	
	21.60 - 22.06	16"		8"		5/8"		5"	7"	14-3/8"	200	150	FCA-2206-E16E	
	21.60 - 22.06	18"		8"	12	5/8"		5"	7"	14-3/8"	220	150	FCA-2206-E18E	
	21.60	20"		5"		n/a		10"	n/a	11-3/4"	164	150	FCA-2160-E20E	
24"	22.06	20"	5/8"	5"		n/a	1/4"	10"	n/a	11-3/4"	169	150	FCA-2206-E20E	
	24.00	20"		*5"		7/8"		5"	7"	14-3/4"	300	150	FCA-2400-E20E	
	24.00	24"		5"	14	n/a		10"	n/a	11-7/8"	226	150	FCA-2400-E24E	
	25.80	20"		*5"		7/8"		5"	7"	14-3/4"	250	150	FCA-2580-E20E	
	25.80	24"		5"		n/a		10"	n/a	11-7/8"	233	150	FCA-2580-E24E	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - Low alloy steel per ASTM A242 or AWWA C111
- Flange - Class E AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/05/21

Submitted By: