



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-xxxx-ExxR style)



14" - 24" STYLE FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

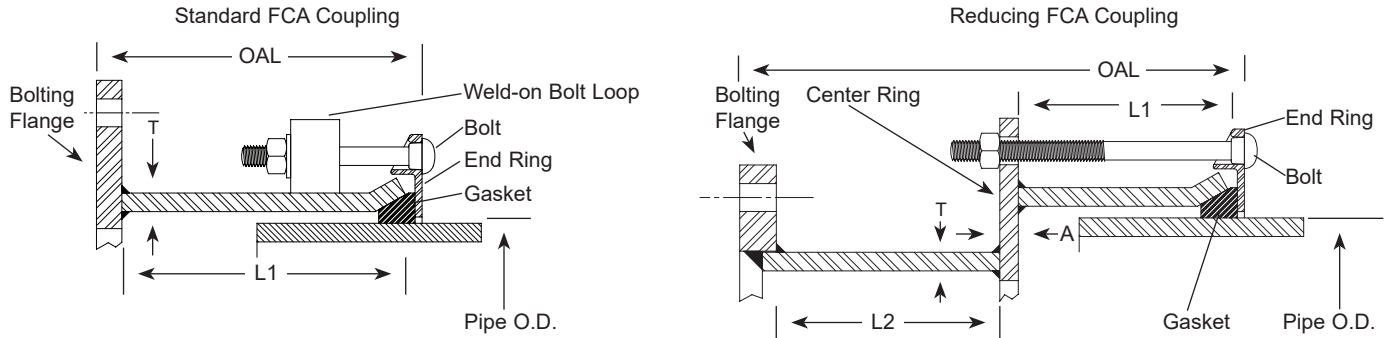

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FLG SIZE	END RING BOLTS			DIMENSION		SLEEVE LGTH		APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.	A	T	L1	L2					
14"	13.69 - 14.04	12"	5/8"	8"	7	3/8"	1/4"	5"	7"	13-7/8"	107	175	FCA-1404-E12R	
	13.69 - 14.04	14"		8"		3/8"		5"	7"	13-7/8"	128	150	FCA-1404-E14R	
	15.30 - 15.70	10"		8"		3/8"		5"	7"	13-7/8"	133	175	FCA-1570-E10R	
	15.30 - 15.70	12"		8"	9	3/8"		5"	7"	13-7/8"	135	175	FCA-1570-E12R	
	15.30	14"		5"		n/a		10"	n/a	11-1/2"	108	150	FCA-1530-E14R	
16"	15.70	14"		5"		n/a		10"	n/a	11-1/2"	114	150	FCA-1570-E14R	
	16.00 - 16.35	14"	5/8"	8"	10	1/2"	1/4"	5"	7"	14-1/8"	166	150	FCA-1635-E14R	
	16.00	16"		5"		n/a		10"	n/a	11-1/2"	128	150	FCA-1600-E16R	
	17.40 - 17.80	12"		8"		1/2"		5"	7"	14-1/8"	152	175	FCA-1780-E12R	
	17.40	16"		5"		n/a		10"	n/a	11-1/2"	134	150	FCA-1740-E16R	
18"	17.80	16"		5"		n/a		10"	n/a	11-1/2"	135	150	FCA-1780-E16R	
	18.00	18"	5/8"	5"	11	n/a	1/4"	10"	n/a	11-5/8"	136	150	FCA-1800-E18R	
	19.50 - 20.00	14"		8"		5/8"		5"	7"	14-1/4"	153		FCA-2000-E14R	
	19.50 - 20.00	16"		8"		5/8"		5"	7"	14-1/4"	210		FCA-2000-E16R	
	19.50	18"		5"		n/a		10"	n/a	11-5/8"	140		FCA-1950-E18R	
20"	19.50 - 20.00	18"		8"	12	5/8"		5"	7"	14-3/8"	192	150	FCA-2000-E18R	
	20.00	20"	5/8"	5"		n/a		10"	n/a	11-3/4"	160		FCA-2000-E20R	
	21.60 - 22.06	16"		8"		5/8"		5"	7"	14-3/8"	200		FCA-2206-E16R	
	21.60 - 22.06	18"		8"		5/8"		5"	7"	14-3/8"	220		FCA-2206-E18R	
	21.60	20"		5"		n/a		10"	n/a	11-3/4"	164		FCA-2160-E20R	
24"	22.06	20"	5/8"	5"	14	n/a	1/4"	10"	n/a	11-3/4"	169	150	FCA-2206-E20R	
	24.00	20"		*5"		7/8"		5"	7"	14-3/4"	300		FCA-2400-E20R	
	24.00	24"		5"		n/a		10"	n/a	11-7/8"	226		FCA-2400-E24R	
	25.80	20"		*5"		7/8"		5"	7"	14-3/4"	250		FCA-2580-E20R	
	25.80	24"		5"		n/a		10"	n/a	11-7/8"	233		FCA-2580-E24R	

Note: Flexible couplings do not restrain axial forces on piping.

* 24" reducing coupling sleeves employ weld-on bolt loops rather than connecting to center ring.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Ductile iron per ASTM A536 or carbon steel per ASTM A36
- Bolts and Nuts - Low alloy steel per ASTM A242 or AWWA C111
- Flange - Class E AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Black shop coat - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/05/21

Submitted By: