



SUBMITTAL INFORMATION

Iron Service Saddles - (FCD202-xxx-TAP-Q-U100 style)



DUAL BAND EPOXY COATING IRON SERVICE SADDLES FOR USE ON DUCTILE IRON AND A/C PIPE, WITH 316 STAINLESS STEEL HARDWARE

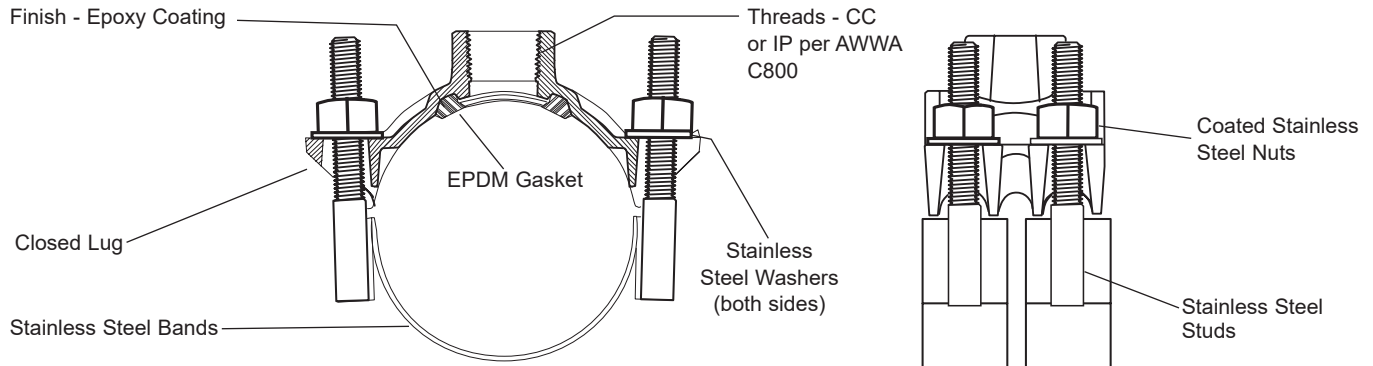

NOM. PIPE SIZE (IN.)	O.D. RANGE (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2	■ 2.35 - 2.50	2.8	FCD202-250-TAP-Q-U100	
2-1/2	■ 2.75 - 2.90	2.8	FCD202-290-TAP-Q-U100	
3	*3.46 - 3.80	4.8	FCD202-380-TAP-Q-U100	
	*3.80 - 4.25	5.5	FCD202-425-TAP-Q-U100	
	**4.26 - 4.80	5.4	FCD202-480-TAP-Q-U100	
4	▲4.74 - 5.00	5.4	FCD202-500-TAP-Q-U100	
	*4.74 - 5.26	5.4	FCD202-526-TAP-Q-U100	
	▲4.97 - 5.26	5.4	FCD202-526-TAP-Q-U100	
	4.50 - 5.40	5.4	FCD202-540-TAP-Q-U100	
	5.94 - 6.69	5.7	FCD202-669-TAP-Q-U100	
6	6.63 - 6.90	5.7	FCD202-690-TAP-Q-U100	
	6.84 - 7.60	6.7	FCD202-760-TAP-Q-U100	
	6.63 - 7.61	6.7	FCD202-761-TAP-Q-U100	
	7.93 - 8.71	6.8	FCD202-871-TAP-Q-U100	
8	8.63 - 9.05	8.2	FCD202-905-TAP-Q-U100	
	8.99 - 9.79	8.4	FCD202-979-TAP-Q-U100	
	8.63 - 9.80	8.4	FCD202-980-TAP-Q-U100	
	10.00 - 10.75	9.4	FCD202-1075-TAP-Q-U100	
10	10.75 - 11.10	9.0	FCD202-1110-TAP-Q-U100	
	11.10 - 12.12	10.8	FCD202-1212-TAP-Q-U100	
	10.64 - 12.13	10.8	FCD202-1213-TAP-Q-U100	
	12.00 - 12.75	11.0	FCD202-1275-TAP-Q-U100	
12	12.75 - 13.20	9.0	FCD202-1320-TAP-Q-U100	
	13.20 - 14.38	12.8	FCD202-1438-TAP-Q-U100	
	12.62 - 14.39	12.8	FCD202-1439-TAP-Q-U100	
14	15.30 - 16.25	11.9	FCD202-1625-TAP-Q-U100	
	16.30 - 17.25	12.9	FCD202-1725-TAP-Q-U100	
16	17.40 - 18.40	13.1	FCD202-1840-TAP-Q-U100	
	18.50 - 19.25	12.3	FCD202-1925-TAP-Q-U100	
18	19.50 - 20.50	13.1	FCD202-2050-TAP-Q-U100	
20	21.20 - 22.20	13.2	FCD202-2220-TAP-Q-U100	
	22.50 - 23.50	13.3	FCD202-2350-TAP-Q-U100	
	23.80 - 24.80	13.4	FCD202-2480-TAP-Q-U100	
24	25.60 - 26.50	13.9	FCD202-2650-TAP-Q-U100	
30	31.74 - 32.74	14.8	FCD202-3274-TAP-Q-U100	

* Saddles with this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

** These saddles with 1-1/4" through 2-1/2" taps fit the top of the listed range only. Example FCD202-480-CC7 fits 4.80" pipe O.D. only.

▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

■ These saddles are only available with 3/4" CC/IP or 1" CC/IP threads

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD

THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Each dual band and 5/8" UNC threaded studs are type 316 stainless steel. For saddles 3" or smaller, studs are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Conforms to AWWA C800
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/18/25

Submitted By: