


SUBMITTAL INFORMATION

Fabricated Steel Saddle- (FCD202-xxxx-TAP-U100 style)





14" - 30" FABRICATED STEEL SADDLE - WITH STAINLESS STEEL BANDS (3" & 4" TAPS)

Tap - Iron Pipe Thread
per AWWA C800

5/8" Studs Type 304
Stainless Steel

Heavy hex nuts and
washers - Nuts are
coated to prevent
galling

Gasket - NBR (Buna-N)
Rubber per ASTM D2000

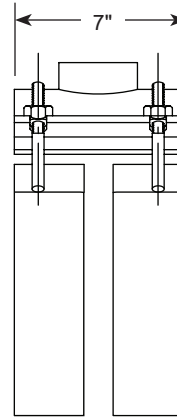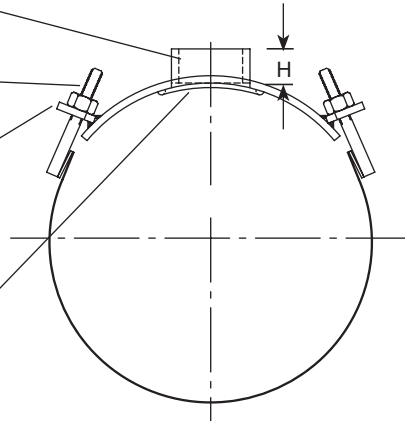

Body - Fabricated Steel
Finish - Epoxy coating

Bands - Type 304 Stainless
Steel

NOM. PIPE SIZE	ACTUAL PIPE O.D. (IN.)	TAP SIZE (INCHES)	BOSS HEIGHT H	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
14"	14.00	3	3-1/16"	22.0	FCD202-1400-IP9-U100	
	14.00	4	3-5/16"	23.0	FCD202-1400-IP11-U100	
	15.30	3	3-1/16"	22.6	FCD202-1530-IP9-U100	
	15.30	4	3-5/16"	23.4	FCD202-1530-IP11-U100	
16"	16.00	3	3-1/16"	23.5	FCD202-1600-IP9-U100	
	16.00	4	3-5/16"	23.9	FCD202-1600-IP11-U100	
	17.40	3	1-7/16"	23.7	FCD202-1740-IP9-U100	
	17.40	4	1-9/16"	24.6	FCD202-1740-IP11-U100	
	17.80	3	1-7/16"	23.8	FCD202-1780-IP9-U100	
	17.80	4	1-9/16"	24.1	FCD202-1780-IP11-U100	
	18.00	3	1-7/16"	24.0	FCD202-1800-IP9-U100	
	18.00	4	1-9/16"	24.4	FCD202-1800-IP11-U100	
18"	19.50	3	1-7/16"	24.5	FCD202-1950-IP9-U100	
	19.50	4	1-9/16"	24.9	FCD202-1950-IP11-U100	
20"	20.00	3	1-7/16"	24.9	FCD202-2000-IP9-U100	
	20.00	4	1-9/16"	25.4	FCD202-2000-IP11-U100	
	21.60	3	1-7/16"	25.0	FCD202-2160-IP9-U100	
	21.60	4	1-9/16"	25.8	FCD202-2160-IP11-U100	
24"	24.00	3	1-7/16"	25.9	FCD202-2400-IP9-U100	
	24.00	4	1-9/16"	26.3	FCD202-2400-IP11-U100	
	25.80	3	1-7/16"	27.0	FCD202-2580-IP9-U100	
	25.80	4	1-9/16"	27.5	FCD202-2580-IP11-U100	
	30.00	3	1-7/16"	28.3	FCD202-3000-IP9-U100	
30"	30.00	4	1-9/16"	28.7	FCD202-3000-IP11-U100	
	32.00	3	1-7/16"	29.9	FCD202-3200-IP9-U100	
	32.00	4	1-9/16"	30.4	FCD202-3200-IP11-U100	

FEATURES

- 150 psi working pressure, dependent upon industry standard support and backfill practices.
- Boss tapped with iron pipe threads.
- Body made of carbon steel per ASTM A36
- Finish on saddle body is fusion-bonded epoxy coating - NSF 61 approved
- Each dual band and 5/8" UNC threaded studs are type 304 stainless steel
- Conforms to AWWA C800
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/26/22

Submitted By: