



SUBMITTAL INFORMATION


Dismantling Joint - (FDJ-DxxB-R style)



RESTRAINED DISMANTLING JOINT - CLASS D FLANGE

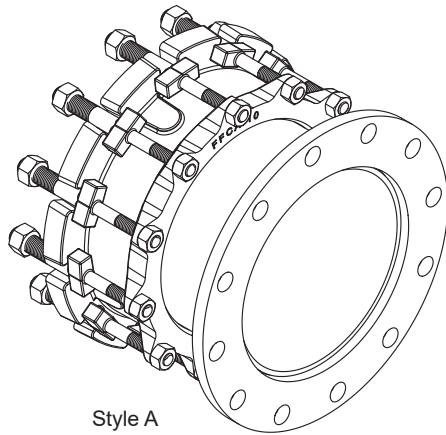

Style A

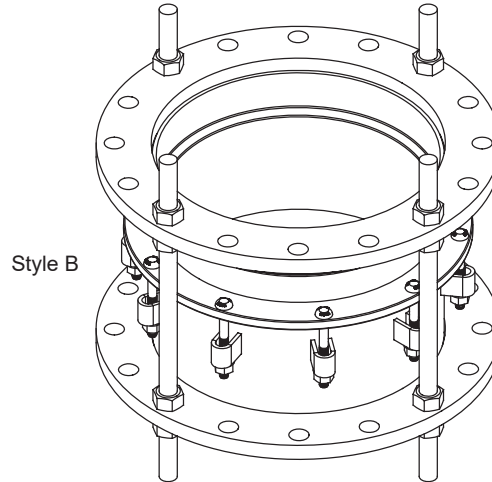

Style B

NOMINAL SIZE (IN.)	CATALOG NUMBER	STYLE	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	RESTRAINT RODS		APPROX. WEIGHT LBS.	✓ SUBMITTED ITEM(S)
						NUMBER	SIZE (IN.)		
3	FDJ-D3B-R	A	12-1/8	10-1/2	13-3/4	2	5/8 x 18	55	
4	FDJ-D4B-R	A	8-1/16	7-1/8	9	2	5/8 x 14	39	
6	FDJ-D6B-R	A	12-3/4	11-1/4	14-1/4	2	3/4 x 22	67	
8	FDJ-D8B-R	A	15	13-1/4	16-3/4	2	3/4 x 24	88	
10	FDJ-D10B-R	B	15-1/4	13-1/2	17	2	7/8 x 24	93	
12	FDJ-D12B-R	B	15-1/2	14	17	2	7/8 x 24	165	
14	FDJ-D14B-R	B	14-3/4	13-1/4	16-1/4	2	1 x 24	192	
16	FDJ-D16B-R	B	15	13-1/2	16-1/2	2	1 x 24	249	
18	FDJ-D18B-R	B	15-1/8	13-5/8	16-5/8	2	1-1/8 x 24	270	
20	FDJ-D20B-R	B	15-1/8	13-5/8	16-5/8	2	1-1/8 x 24	310	
24	FDJ-D24B-R	B	15-1/4	13-3/4	16-3/4	2	1-1/4 x 30	396	
30	FDJ-D30B-R	B	15-7/8	14-3/4	17	4	1-1/4 x 30	605	
36	FDJ-D36B-R	B	16-1/4	15-1/4	17-1/4	4	1-1/2 x 30	971	
42	FDJ-D42B-R	B	15-1/2	13-3/4	17-1/4	4	1-1/2 x 30	1275	
48	FDJ-D48B-R	B	17-3/8	15-3/4	19	6	1-1/2 x 36	1567	
54	FDJ-D54B-R	B	19	17-1/4	20-3/4	6	1-3/4 x 36	2100	

FEATURES

- Flange - AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe - ASTM A36 carbon steel
- Gaskets - EPDM rubber per ASTM D2000
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Tie rods - Type 304 stainless steel per ASTM A193 and A194
- Finish - Epoxy coating
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

06/24/25

Submitted By: