



SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-DxxC-R-BBN-U style)




RESTRAINED DISMANTLING JOINT - CLASS D FLANGE

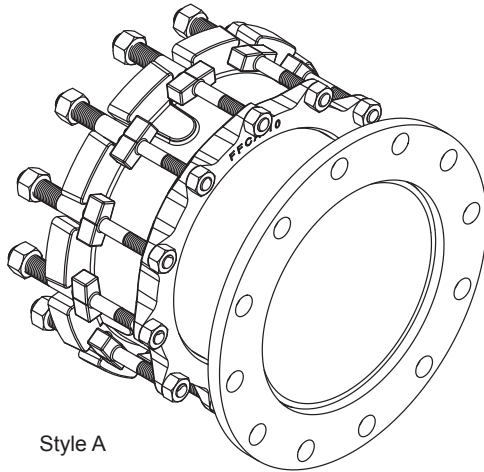

Style A

Style B

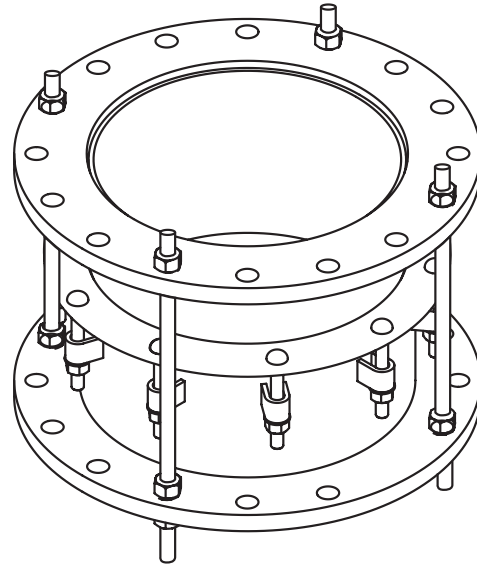

NOMINAL SIZE	CATALOG NUMBER	STYLE	NOMINAL LENGTH	MINIMUM LENGTH	MAXIMUM LENGTH	RESTRAINT RODS		APPROX. WEIGHT	✓ SUBMITTED ITEM(S)
						NUMBER	SIZE		
4"	FDJ-D4C-R-BBN-U	A	8-1/16"	7-1/8"	9"	2	5/8" X 14"	39	
6"	FDJ-D6C-R-BBN-U	B	12-3/4"	11-1/4"	14-1/4"	2	3/4" X 22"	67	
8"	FDJ-D8C-R-BBN-U	B	15"	13-1/4"	16-3/4"	2	3/4" X 24"	88	
12"	FDJ-D12C-R-BBN-U	B	15-1/2"	14"	17"	2	7/8" X 24"	165	
14"	FDJ-D14C-R-BBN-U	B	14-3/4"	13-1/4"	16-1/4"	2	1" X 24"	192	
16"	FDJ-D16C-R-BBN-U	B	15"	13-1/2"	16-1/2"	2	1" X 24"	249	
20"	FDJ-D20C-R-BBN-U	B	15-1/8"	13-5/8"	16-5/8"	2	1-1/8" X 24"	310	
24"	FDJ-D24C-R-BBN-U	B	15-1/4"	13-3/4"	16-3/4"	2	1-1/4" X 30"	396	

FEATURES

- Flange: AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe: ASTM A36 carbon steel
- Gaskets - Extruded NBR (Buna-N) rubber per ASTM D2000
- Bolts and Nuts - High strength, low alloy steel per AWWA C111 with blue fluorocarbon coating
- Tie rods - Grade B7 steel per ASTM A193
- Coating - Fusion bonded epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/15/22

Submitted By: