



SUBMITTAL INFORMATION


Dismantling Joint - (FDJ-DxxE-R-BBN style)



RESTRAINED DISMANTLING JOINT - CLASS D FLANGE

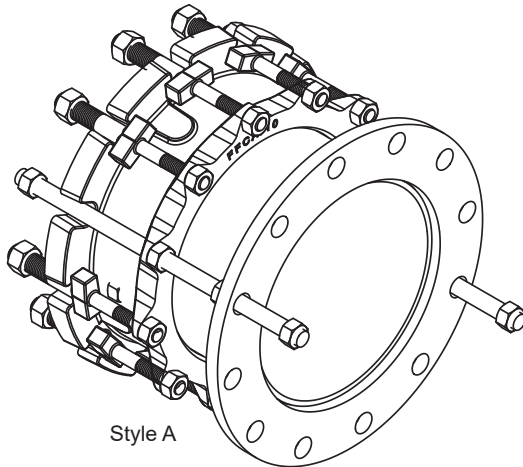

Style A

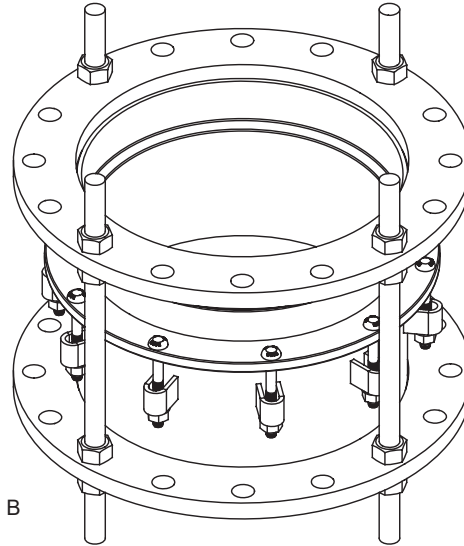

Style B

NOMINAL SIZE (IN.)	CATALOG NUMBER	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	RESTRAINT RODS		STYLE	APPROX. WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE (IN.)			
3	FDJ-D3E-R-BBN	8-5/16	7-1/2	9-1/8	2	5/8 x 14	A	31	
4	FDJ-D4E-R-BBN	8-1/16	7-1/8	9	2	5/8 x 14	A	39	
6	FDJ-D6E-R-BBN	9	8	10	2	3/4 x 15	A	59	
8	FDJ-D8E-R-BBN	9-1/16	8-1/8	10	2	3/4 x 15	A	80	
10	FDJ-D10E-R-BBN	15-1/4	13-1/2	17	2	7/8 x 24	B	93	
12	FDJ-D12E-R-BBN	15-1/2	14	17	2	7/8 x 24	B	165	
14	FDJ-D14E-R-BBN	14-3/4	13-1/4	16-1/4	2	1 x 24	B	192	
16	FDJ-D16E-R-BBN	15	13-1/2	16-1/2	2	1 x 24	B	249	
18	FDJ-D18E-R-BBN	15-1/8	13-5/8	16-5/8	2	1-1/8 x 24	B	270	
20	FDJ-D20E-R-BBN	15-1/8	13-5/8	16-5/8	2	1-1/8 x 24	B	310	
24	FDJ-D24E-R-BBN	15-1/4	13-3/4	16-3/4	2	1-1/4 x 30	B	396	
30	FDJ-D30E-R-BBN	15-7/8	14-3/4	17	4	1-1/4 x 30	B	605	
36	FDJ-D36E-R-BBN	16-1/4	15-1/4	17-1/4	4	1-1/2 x 30	B	971	
42	FDJ-D42E-R-BBN	15-1/2	13-3/4	17-1/4	4	1-1/2 x 30	B	1275	
48	FDJ-D48E-R-BBN	17-3/8	15-3/4	19	6	1-1/2 x 36	B	1567	

FEATURES

- Flange - AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe - ASTM A36 carbon steel
- Gaskets - SBR rubber per ASTM D2000
- Bolts and Nuts - High strength, low alloy steel per AWWA C111, with blue fluorocarbon coating
- Tie rods - Grade B7 steel per ASTM A193
- Finish - Epoxy coating
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

09/13/24

Submitted By: