




SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-DxxE-R style)

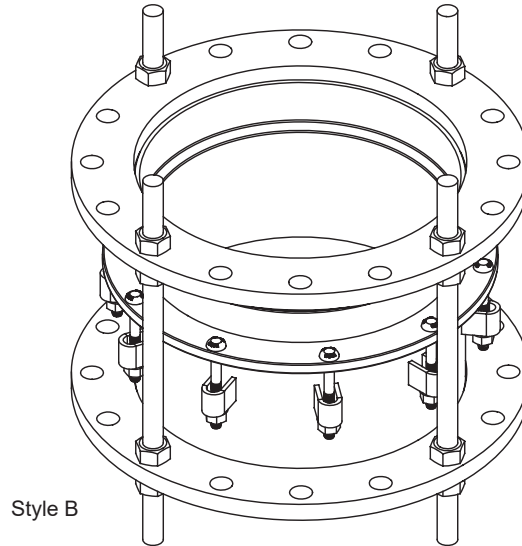

RESTRAINED DISMANTLING JOINT - CLASS D FLANGE

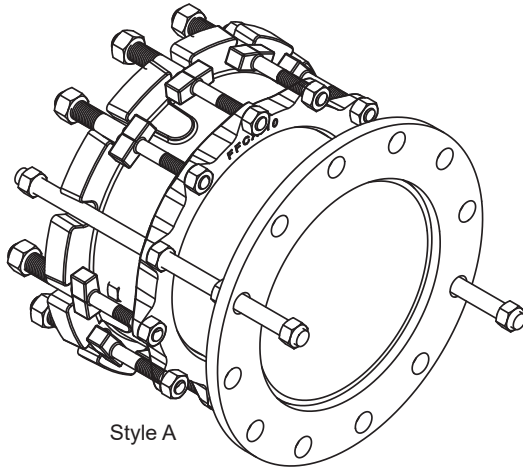

NOMINAL SIZE (IN.)	CATALOG NUMBER	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	RESTRAINT RODS		STYLE	APPROX. WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE (IN.)			
3	FDJ-D3E-R	8-5/16	7-1/2	9-1/8	2	5/8 x 14	A	31	
4	FDJ-D4E-R	8-1/16	7-1/8	9	2	5/8 x 14	A	39	
6	FDJ-D6E-R	9	8	10	2	3/4 x 15	A	59	
8	FDJ-D8E-R	9-1/16	8-1/8	10	2	3/4 x 15	A	80	
10	FDJ-D10E-R	15-1/4	13-1/2	17	2	7/8 x 24	B	93	
12	FDJ-D12E-R	15-1/2	14	17	2	7/8 x 24	B	165	
14	FDJ-D14E-R	14-3/4	13-1/4	16-1/4	2	1 x 24	B	192	
16	FDJ-D16E-R	15	13-1/2	16-1/2	2	1 x 24	B	249	
18	FDJ-D18E-R	15-1/8	13-5/8	16-5/8	2	1-1/8 x 24	B	270	
20	FDJ-D20E-R	15-1/8	13-5/8	16-5/8	2	1-1/8 x 24	B	310	
24	FDJ-D24E-R	15-1/4	13-3/4	16-3/4	2	1-1/4 x 30	B	396	
30	FDJ-D30E-R	15-7/8	14-3/4	17	4	1-1/4 x 30	B	605	
36	FDJ-D36E-R	16-1/4	15-1/4	17-1/4	4	1-1/2 x 30	B	971	
42	FDJ-D42E-FBE-R	15-1/2	13-3/4	17-1/4	4	1-1/2 x 30	B	1275	
48	FDJ-D48E-FBE-R	17-3/8	15-3/4	19	6	1-1/2 x 36	B	1567	

FEATURES

- Flange - AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe - ASTM A36 carbon steel
- Gaskets - SBR rubber per ASTM D2000
- Bolts and Nuts - High strength, low alloy steel per AWWA C111
- Tie rods - Grade B7 steel per ASTM A193
- Finish - Fusion bonded epoxy coating per AWWA C213
- Rated to 150 psi working pressure
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/26/24

Submitted By: