



SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-DxxX-R-U style)



RESTRAINED DISMANTLING JOINT - CLASS D FLANGE

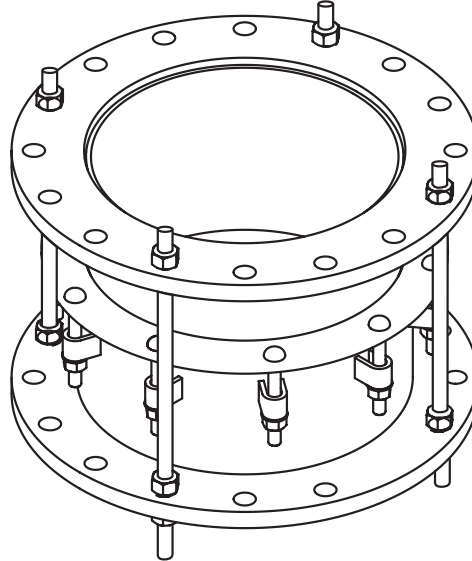

NOMINAL SIZE	CATALOG NUMBER	NOMINAL LENGTH	MINIMUM LENGTH	MAXIMUM LENGTH	RESTRAINT RODS		APPROX. WEIGHT (Lbs.)	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE		
12"	FDJ-D12X-R-U	15-1/2"	14"	17"	3	7/8" x 24"	165	
14"	FDJ-D14X-R-U	14-3/4"	13-1/4"	16-1/4"	4	1" X 24"	192	
16"	FDJ-D16X-R-U	15"	13-1/2"	16-1/2"	4	1" X 24"	249	
18"	FDJ-D18X-R-U	15-1/8"	13-5/8"	16-5/8"	4	1-1/8" X 24"	270	
20"	FDJ-D20X-R-U	15-1/8"	13-5/8"	16-5/8"	4	1-1/8" X 24"	310	
24"	FDJ-D24X-R-U	15-1/4"	13-3/4"	16-3/4"	4	1-1/4" X 30"	396	
30"	FDJ-D30X-R-U	15-7/8"	14-3/4"	17"	7	1-1/4" X 30"	605	
36"	FDJ-D36X-R-U	16-1/4"	15-1/4"	17-1/4"	8	1-1/2" X 30"	971	
42"	FDJ-D42X-R-U	15-1/2"	13-3/4"	17-1/4"	9	1-1/2" X 30"	1275	
48"	FDJ-D48X-R-U	17-3/8"	15-3/4"	19"	11	1-1/2" X 36"	1567	

FEATURES

- Flange: Drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb. Drilling
- Flange and adjusting pipe: ASTM A36 carbon steel
- Gaskets - Extruded SBR rubber per ASTM D2000
- Bolts and nuts - Type 304 stainless steel per ASTM A193 and A194
- Tie Rods - Type 304 stainless steel per ASTM A193 and A194
- Finish - Black shop coat - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

10/31/22

Submitted By: