



# SUBMITTAL INFORMATION


## Dismantling Joint - (FDJ-DxxY-U100 style)



### DISMANTLING JOINT WITH 304 STAINLESS STEEL HARDWARE - CLASS D FLANGE

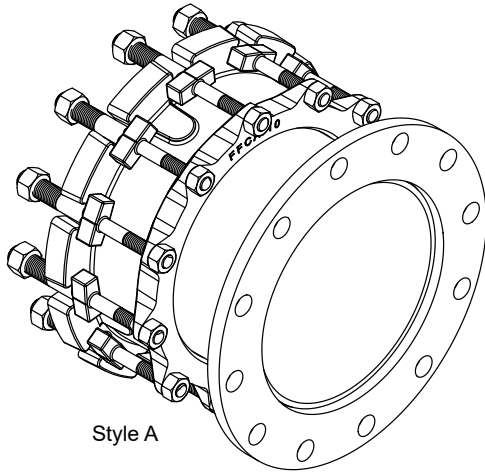

Style A

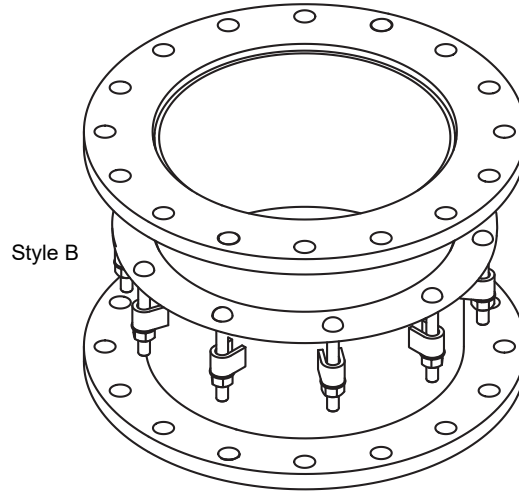

Style B

| NOMINAL SIZE | CATALOG NUMBER | STYLE | NOMINAL LENGTH | MINIMUM LENGTH | MAXIMUM LENGTH | APPROX. WEIGHT (LBS.) | ✓ SUBMITTED ITEM(S) |
|--------------|----------------|-------|----------------|----------------|----------------|-----------------------|---------------------|
| 4"           | FDJ-D4Y-U100   | A     | 8-1/16"        | 7-1/8"         | 9"             | 39                    |                     |
| 6"           | FDJ-D6Y-U100   | B     | 12-3/4"        | 11-1/4"        | 14-1/4"        | 67                    |                     |
| 8"           | FDJ-D8Y-U100   | B     | 15"            | 13-1/4"        | 16-3/4"        | 88                    |                     |
| 10"          | FDJ-D10Y-U100  | B     | 15-1/4"        | 13-1/2"        | 17"            | 93                    |                     |
| 12"          | FDJ-D12Y-U100  | B     | 15-1/2"        | 14"            | 17"            | 165                   |                     |
| 14"          | FDJ-D14Y-U100  | B     | 14-3/4"        | 13-1/4"        | 16-1/4"        | 192                   |                     |
| 16"          | FDJ-D16Y-U100  | B     | 15"            | 13-1/2"        | 16-1/2"        | 249                   |                     |
| 18"          | FDJ-D18Y-U100  | B     | 15-1/8"        | 13-5/8"        | 16-5/8"        | 270                   |                     |
| 20"          | FDJ-D20Y-U100  | B     | 15-1/8"        | 13-5/8"        | 16-5/8"        | 310                   |                     |
| 24"          | FDJ-D24Y-U100  | B     | 15-1/4"        | 13-3/4"        | 16-3/4"        | 396                   |                     |
| 30"          | FDJ-D30Y-U100  | B     | 15-7/8"        | 14-3/4"        | 17"            | 605                   |                     |
| 36"          | FDJ-D36Y-U100  | B     | 16-1/4"        | 15-1/4"        | 17-1/4"        | 971                   |                     |
| 42"          | FDJ-D42Y-U100  | B     | 15-1/2"        | 13-3/4"        | 17-1/4"        | 1275                  |                     |
| 48"          | FDJ-D48Y-U100  | B     | 17-3/8"        | 15-3/4"        | 19"            | 1567                  |                     |

## FEATURES

- Flange: AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe: ASTM A36 carbon steel
- Gaskets - Extruded SBR rubber per ASTM D2000
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Coating - Fusion bonded epoxy - NSF 61 approved
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

06/23/21

Submitted By: