



SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-ExxE-R style)



RESTRAINED DISMANTLING JOINT - CLASS E FLANGE WITH EPOXY COATING

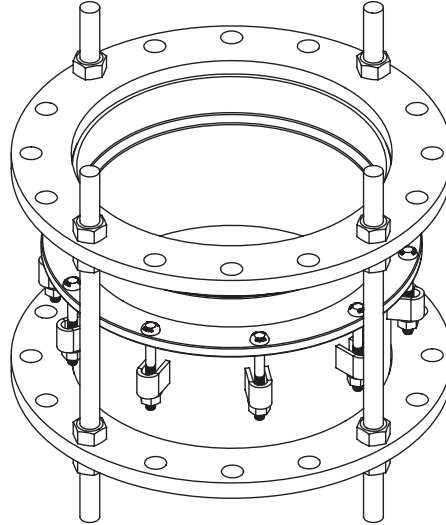

NOMINAL SIZE (IN.)	CATALOG NUMBER	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	RESTRAINT RODS		APPROX. WEIGHT	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE (IN.)		
3	FDJ-E3E-R	13-1/8	11-1/2	14-3/4	2	5/8 x 24	60	
4	FDJ-E4E-R	13-1/8	11-1/2	14-3/4	2	5/8 x 24	70	
6	FDJ-E6E-R	14	12-1/2	15-1/2	2	3/4 x 24	92	
8	FDJ-E8E-R	16-5/8	14-7/8	18-3/8	4	3/4 x 26	126	
10	FDJ-E10E-R	17	15-1/4	18-3/4	3	7/8 x 26	156	
12	FDJ-E12E-R	17-3/8	15-7/8	18-7/8	2	7/8 x 26	186	
14	FDJ-E14E-R	16-5/8	15-1/8	18-1/8	2	1 x 26	358	
16	FDJ-E16E-R	17	15-1/2	18-1/2	4	1 x 30	375	
18	FDJ-E18E-R	17-1/4	15-3/4	18-3/4	4	1-1/8 x 30	390	
20	FDJ-E20E-R	17-5/8	16-1/8	19-1/8	4	1-1/8 x 30	608	
24	FDJ-E24E-R	18	16-1/2	19-1/2	4	1-1/4 x 30	660	
30	FDJ-E30E-R	18-7/8	17-3/4	20	6	1-1/4 x 36	1,345	
36	FDJ-E36E-R	19-1/4	18-1/4	20-1/4	6	1-1/2 x 36	-	
42	FDJ-E42E-FBE-R	18-3/4	17	20-1/2	8	1-1/2 x 36	-	
48	FDJ-E48E-FBE-R	20-5/8	19	22-1/4	10	1-1/2 x 36	-	

FEATURES

- Flange - AWWA C207 Class E flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb
- Flange and adjusting pipe - A36 carbon steel
- Gaskets - SBR rubber per ASTM D2000
- Bolts and Nuts - High strength, low alloy steel per AWWA C111
- Tie rods - Grade B7 steel per ASTM A193
- Finish - Fusion-bonded epoxy coating per AWWA C213
- Rated for 250 psi working pressure
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/17/25

Submitted By: