



SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-FxxA-R-U style)



RESTRAINED DISMANTLING JOINT - CLASS F FLANGE

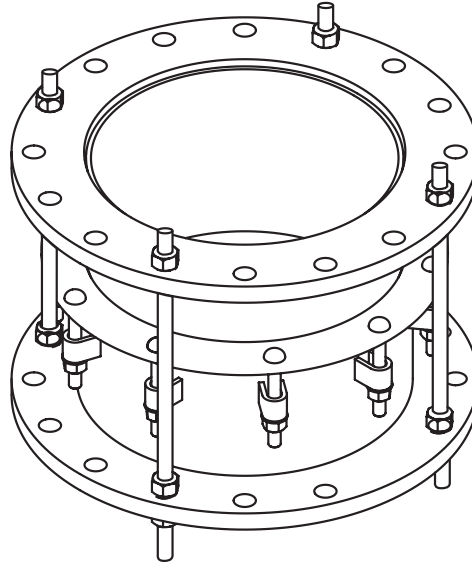

NOMINAL SIZE	CATALOG NUMBER	NOMINAL LENGTH	MINIMUM LENGTH	MAXIMUM LENGTH	RESTRAINT RODS		APPROX. WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE		
4"	FDJ-F4A-R-U	13-1/8"	11-1/2"	14-3/4"	2	3/4" x 24"	55	
6"	FDJ-F6A-R-U	14"	12-1/2"	15-1/2"	2	3/4" x 22"	101	
8"	FDJ-F8A-R-U	16-1/4"	14-1/2"	18"	2	7/8" x 26"	150	
10"	FDJ-F10A-R-U	16-7/8"	15-1/8"	18-5/8"	2	1" x 26"	192	
12"	FDJ-F12A-R-U	17-1/8"	15-5/8"	18-5/8"	2	1-1/8" x 28"	252	
14"	FDJ-F14A-R-U	16-3/4"	15-1/4"	18-1/4"	2	1-1/8" x 28"	416	
16"	FDJ-F16A-R-U	17-1/4"	15-3/4"	18-3/4"	2	1-1/4" x 30"	481	
18"	FDJ-F18A-R-U	17-1/2"	16"	19"	2	1-1/4" x 30"	586	
20"	FDJ-F20A-R-U	17-1/2"	16"	19"	4	1-1/4" x 30"	702	
24"	FDJ-F24A-R-U	18-1/8"	16-5/8"	19-5/8"	4	1-1/2" x 30"	-	
30"	FDJ-F30A-R-U	19-3/8"	18-1/4"	20-1/2"	4	1-3/4" x 36"	-	
36"	FDJ-F36A-R-U	19-7/8"	18-7/8"	20-7/8"	4	2" x 36"	975	

FEATURES

- Flange - AWWA Class F flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 250 lb
- Flange and adjusting pipe - A36 carbon steel
- Gaskets - Extruded EPDM rubber per ASTM D2000
- Bolts and Nuts - High strength, low alloy steel per ASTM A242 and AWWA C111
- Tie rods - Grade B7 steel per ASTM A193
- Finish - Fusion-bonded epoxy coating - NSF 61 approved
- Rated for 300 psi working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/1/22

Submitted By: