



# SUBMITTAL INFORMATION

## Dismantling Joint - (FDJ-FxxP-R-U100 style)



### RESTRAINED DISMANTLING JOINT - CLASS F FLANGE

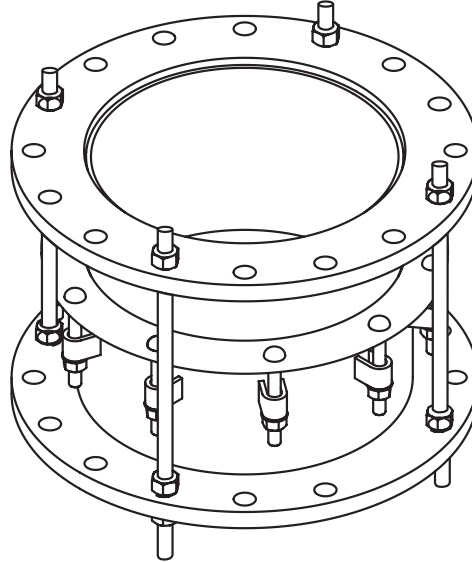

NOMINAL SIZE	CATALOG NUMBER	NOMINAL LENGTH	MINIMUM LENGTH	MAXIMUM LENGTH	RESTRAINT RODS		APPROX. WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE		
4"	FDJ-F4P-R-U100	13-1/8"	11-1/2"	14-3/4"	2	3/4" x 24"	55	
6"	FDJ-F6P-R-U100	14"	12-1/2"	15-1/2"	2	3/4" x 24"	101	
8"	FDJ-F8P-R-U100	16-1/4"	14-1/2"	18"	4	7/8" x 26"	150	
10"	FDJ-F10P-R-U100	16-7/8"	15-1/8"	18-5/8"	4	1" x 26"	192	
12"	FDJ-F12P-R-U100	17-1/8"	15-5/8"	18-5/8"	4	1-1/8" x 28"	252	
14"	FDJ-F14P-R-U100	16-3/4"	15-1/4"	18-1/4"	4	1-1/8" x 28"	416	
16"	FDJ-F16P-R-U100	17-1/4"	15-3/4"	18-3/4"	4	1-1/4" x 30"	481	
18"	FDJ-F18P-R-U100	17-1/2"	16"	19"	6	1-1/4" x 30"	586	
20"	FDJ-F20P-R-U100	17-1/2"	16"	19"	6	1-1/4" x 30"	702	
24"	FDJ-F24P-R-U100	18-1/8"	16-5/8"	19-5/8"	6	1-1/2" x 30"	-	
30"	FDJ-F30P-R-U100	19-3/8"	18-1/4"	20-1/2"	7	1-3/4" x 36"	-	
36"	FDJ-F36P-R-U100	19-7/8"	18-7/8"	20-7/8"	8	2" x 36"	975	

### FEATURES

- Flange: AWWA Class F flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 250 lb
- Flange and adjusting pipe: A36 carbon steel
- Gaskets - Extruded NBR (Buna-N) rubber per ASTM D2000
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Tie Rods - Type 304 stainless steel per ASTM A193 and A194
- Finish - Fusion-bonded epoxy coating - NSF 61 approved
- Rated for 300 psi working pressure
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

11/1/22

Submitted By: