



SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-FxxY-R-U100 style)



RESTRAINED DISMANTLING JOINT - CLASS F FLANGE WITH 304 STAINLESS STEEL HARDWARE AND EPOXY COATING

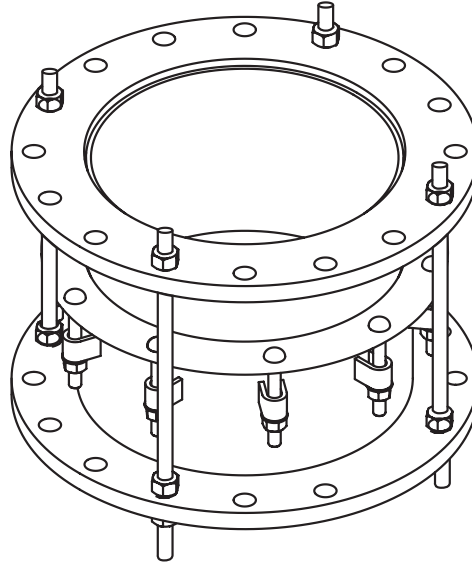

NOMINAL SIZE (IN.)	CATALOG NUMBER	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	RESTRAINT RODS		APPROX. WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE (IN.)		
4	FDJ-F4Y-R-U100	13-1/8	11-1/2	14-3/4	2	3/4 x 24	55	
6	FDJ-F6Y-R-U100	14	12-1/2	15-1/2	2	3/4 x 24	101	
8	FDJ-F8Y-R-U100	16-1/4	14-1/2	18	4	7/8 x 26	150	
10	FDJ-F10Y-R-U100	16-7/8	15-1/8	18-5/8	4	1 x 26	192	
12	FDJ-F12Y-R-U100	17-1/8	15-5/8	18-5/8	4	1-1/8 x 28	252	
14	FDJ-F14Y-R-U100	16-3/4	15-1/4	18-1/4	4	1-1/8 x 28	416	
16	FDJ-F16Y-R-U100	17-1/4	15-3/4	18-3/4	4	1-1/4 x 30	481	
18	FDJ-F18Y-R-U100	17-1/2	16	19	6	1-1/4 x 30	586	
20	FDJ-F20Y-R-U100	17-1/2	16	19	6	1-1/4 x 30	702	
24	FDJ-F24Y-R-U100	18-1/8	16-5/8	19-5/8	6	1-1/2 x 30	-	
30	FDJ-F30Y-R-U100	19-3/8	18-1/4	20-1/2	7	1-3/4 x 36	-	
36	FDJ-F36Y-R-U100	19-7/8	18-7/8	20-7/8	8	2 x 36	975	

FEATURES

- Flange - AWWA Class F flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 250 lb
- Flange and adjusting pipe - A36 carbon steel
- Gaskets - SBR rubber per ASTM D2000
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Tie Rods - Type 304 stainless steel per ASTM A193 and A194
- Finish - Epoxy coating
- Rated for 300 psi working pressure
- Certified to ANSI/NSF 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/14/25

Submitted By: