



SUBMITTAL INFORMATION

Ductile Iron Couplings - (FEC-xxx-BBN style)



END CAP COUPLING FOR CAST, DUCTILE IRON OR PVC PIPE WITH BLUE FLUOROCARBON-COATED HARDWARE

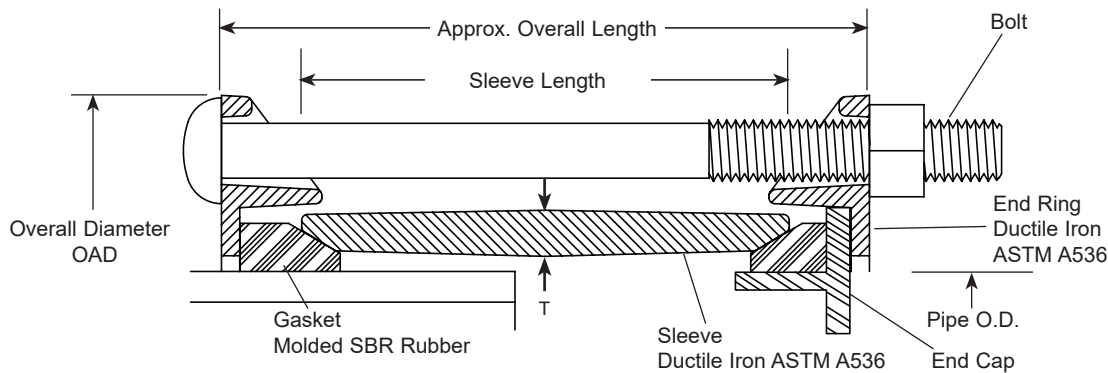

NOM. PIPE SIZE (IN.)	PIPE O.D. RANGE (IN.)	CATALOG NUMBER	APPROX. OAD (IN.)	SLEEVE LENGTH (IN.)	APPROX. OAL (IN.)	END CAP ONLY (INCLUDES GASKET)		MIN. NO. BOLTS	APPROX. WT. LBS.	✓SUBMITTED ITEM(S)
						FC1 COUPLING	FC2A COUPLING			
4	4.00	FEC-400-BBN	9.45	5	6-1/8	FEC1-4-BBN	FEC2-4-BBN	3	21	
	4.50	FEC-450-BBN								
	4.80-5.14	FEC-514-BBN								
	5.15-5.57	FEC-557-BBN								
6	6.00	FEC-600-BBN	11.11	5	6-1/8	FEC1-6-BBN	FEC2-6-BBN	4	31	
	6.63	FEC-663-BBN								
	6.90-7.20	FEC-720-BBN	11.50							
	7.21-7.56	FEC-756-BBN								
8	8.00	FEC-800-BBN	13.38	5	6-1/8	FEC1-8-BBN	FEC2-8-BBN	5	41	
	8.63	FEC-863-BBN								
	9.05-9.40	FEC-940-BBN								
	9.40-9.74	FEC-974-BBN								
10	11.10-11.40	FEC-1140-BBN	15.65	6	7-1/8	FEC1-10-BBN	FEC2-10-BBN	6	55	
	11.77-12.12	FEC-1212-BBN								
12	13.20-13.50	FEC-1350-BBN	17.75	6	7-1/8	FEC1-12-BBN	FEC2-12-BBN	7	66	

FEATURES

- Sleeve - Ductile iron per ASTM A536, 65-45-12.
- End Rings - Ductile iron per ASTM A536, 65-45-12.
- Gaskets - NBR (Buna-N) per ASTM D2000
- End Cap - Steel with 2" female iron pipe threaded boss
- Bolts - High strength, low alloy per ASTM A242 and AWWA C111 with blue fluorocarbon coating
- Finish - Shop coat
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/02/25

Submitted By: