



SUBMITTAL INFORMATION

Equipment Connection Fitting - (FECF-DxxC style)



FLANGE BY FLANGE FITTING WITH THE ABILITY TO ADJUST FOR LATERAL, RADIAL AND ANGULAR MISALIGNMENT WITH EPOXY COATING AND NBR (BUNA-N) GASKET

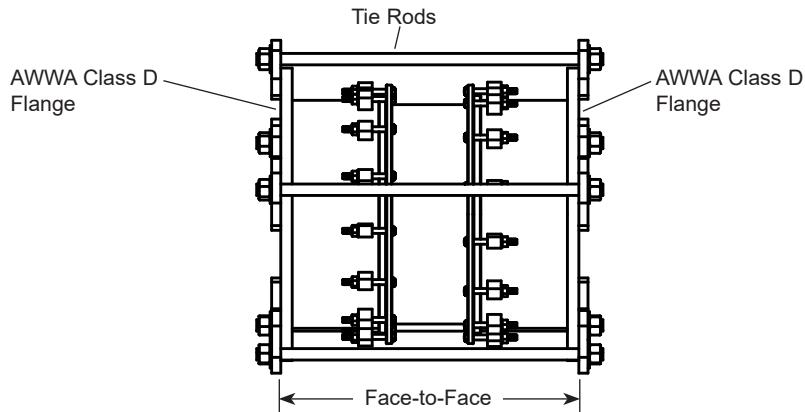

Nom. Pipe Size	Allowable Offset (in.)		Allowable Deflection (in.)		Approx. Face to Face Distance (in.)			Tie Rod			Max. Pressure Rating	Catalog Number
	Min	Max	Min	Max	Min	Nom	Max	Length (in.)	Dia. (in.)	Qty.		
4"	0.5	0.75	3	3.5	25	26	27	36	5/8	2	275 psi	FECF-D4C
6"	0.5	0.75	2.5	3.5	25	26	27	36	3/4	2	275 psi	FECF-D6C

*Contact Ford Meter Box for Higher Pressure Ratings

**Pressure Rating Based on Class D Flange Rating

FEATURES

- Body - Carbon steel per ASTM A36
- Slip Pipe - Carbon steel per ASTM A53
- Tie Rods and Flange Lug Bolts - High tensile steel per ASTM A193, B7
- Heavy Tie Rod Nuts and Heavy Flange Lug Bolt Nuts - Grade 2H per ASTM A194
- Spherical Washers - Carbon steel per ASTM A519, grade 1215
- Flange Lugs - Carbon steel per ASTM A36
- Finish - Fusion bonded epoxy coating
- Gasket - NBR (Buna-N) rubber per ASTM D2000

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: