



SUBMITTAL INFORMATION


Flanged Coupling Adapters - (FFCA-xxx-Y style)



**STYLE FFCA ADAPTERS (EPOXY COATED WITH 304 STAINLESS STEEL HARDWARE)
FOR JOINING PLAIN END PIPE TO FLANGED FITTINGS**

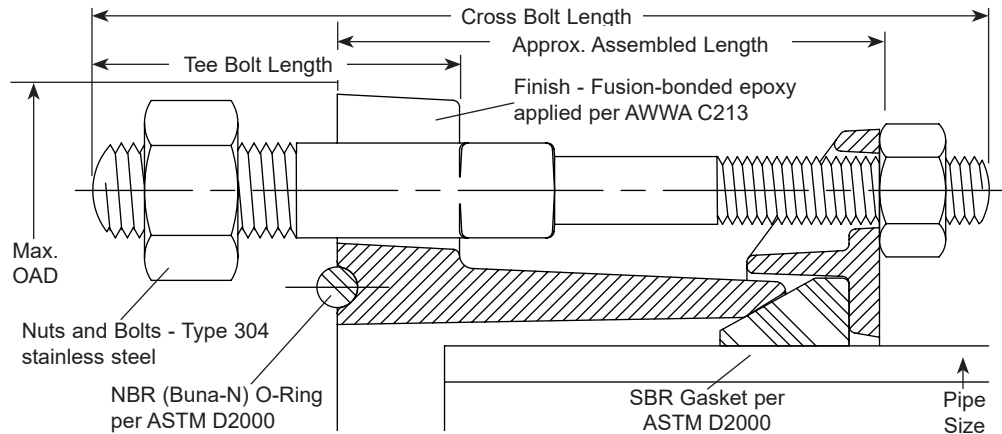

Optional Anchor Studs



NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	END RING COLOR CODE	APPROX. ASSEMBLED LENGTH	MAX. O.D.	(No.) AND SIZE OF CROSS BOLTS	(No.) AND SIZE OF TEE BOLTS	OPTIONAL ANCHOR STUDS	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3"	3.45 - 3.60	Red	3-7/8"	7-1/2"	(4) 5/8"x5/8" x 6-5/8"	-	2	16.6	FFCA-360-Y	
	3.70 - 3.88	Black						16.6	FFCA-388-Y	
	3.91 - 4.06	Black						16.4	FFCA-406-Y	
	4.07 - 4.20	White/Gray						16.5	FFCA-420-Y	
4"	4.45 - 4.60	Red	3-1/2"	9-1/8"	(4) 5/8"x5/8" x 6-5/8"	(4) 5/8"x3"	2	20.2	FFCA-460-Y	
	4.70 - 4.91	Black						20.6	FFCA-491-Y	
	4.92 - 5.16	Black						21.2	FFCA-516-Y	
	5.17 - 5.32	White/Gray						21.5	FFCA-532-Y	
	6.54 - 6.76	Red						31.6	FFCA-676-Y	
6"	6.81 - 7.12	Black	4-1/8"	11-1/8"	(4) 3/4"x5/8" x 7-3/8"	(4) 3/4"x3-1/2"	2	31.3	FFCA-712-Y	
	7.17 - 7.37	Black						31.4	FFCA-737-Y	
	7.37 - 7.60	White/Gray						31.7	FFCA-760-Y	
	8.50 - 8.75	Red						43.1	FFCA-875-Y	
8"	8.76 - 9.17	Black	4-3/16"	13-5/8"	(4) 3/4"x5/8" x 7-3/8"	-	4	42.4	FFCA-917-Y	
	9.22 - 9.50	Black						42.2	FFCA-950-Y	
	9.49 - 9.79	White/Gray						42.3	FFCA-979-Y	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Body and End Rings - Ductile iron per ASTM A536 (65-45-12)
- Gaskets - SBR per ASTM D2000
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194, nuts are coated to prevent galling
- Flange - Drilling per ANSI/AWWA C110/A21.10-86 and per ANSI B16.1 Class 125
- Flange O-Ring - NBR (Buna-N) per ASTM D2000
- Finish - Fusion-bonded epoxy. Applied per AWWA C213
- Rated Working Pressure - 175 PSI
- Optional Anchor Studs: For two studs add "-AS2" to the catalog number. For four studs, add "-AS4" to the catalog number. Examples: FFCA-712-**AS2**, FFCA-917-**AS4**
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/08/22

Submitted By: