


# SUBMITTAL INFORMATION

## Repair Clamps - (FS1-xxx-Length style)



### 2" TO 6" ALL STAINLESS STEEL CIRCLE REPAIR CLAMPS

**Optional Stainless Taps**  
Type 304 stainless steel TIG welded to band. Available with AWWA or I.P. threads.

**Band**  
Type 304 stainless steel


**Lifter Bar**  
Type 304 heavy gauge stainless steel

**Sidebar**  
Type 304 heavy gauge stainless steel

**Lug**  
Type 304 heavy gauge stainless steel

**Armor**  
Type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

**Gasket**  
Gridded virgin SBR compounded for water service, per ASTM D2000. NBR (Buna-N) Nitrile is optional.

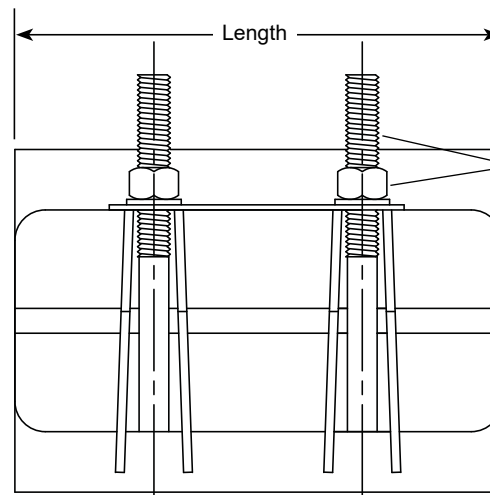

**Bolts & Nuts**  
Type 304 stainless steel per ASTM A193 and A194. Nuts are coated to prevent galling.

#### OUTLET THREAD TAP CODE

CC (AWWA) Thread				IP Thread		
THREAD	CODE NUMBER	MIN. CLAMP SZ.		THREAD	CODE NUMBER	MIN. CLAMP SZ.
3/4" CC	-CC3	2.63		3/4" IP	-IP3	2.63
1" CC	-CC4	2.63		1" IP	-IP4	2.63
1-1/4" CC	-CC5	3.70		1-1/4" IP	-IP5	3.70
1-1/2" CC	-CC6	4.25		1-1/2" IP	-IP6	3.70
2" CC	-CC7	4.73		2" IP	-IP7	4.25

NOM PIPE SIZE	PIPE OD RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)										BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		4"	6"	7.5"	10"	12.5"	15"	20"	24"	30"	36"				
2"	1.69 - 1.96	3	4	4	5	5	8	N/A	N/A	N/A	N/A	1/2" 13 UNC	24 GA.	FS1-196-Length	
	1.90 - 2.15	3	4	4	5	5	8	N/A	N/A	N/A	N/A			FS1-215-Length	
3"	3.25 - 3.50	N/A	4	5	5	6	9	N/A	N/A	N/A	N/A	5/8" 11 UNC	20 GA.	FS1-350-Length	
	5.75 - 6.15	N/A	N/A	7	9	10	14	17	21	27	34			FS1-615-Length	
6"	6.10 - 6.50	N/A	N/A	7	9	10	14	17	21	27	34			FS1-650-Length	
	6.40 - 6.80	N/A	N/A	7	9	10	14	17	21	27	34			FS1-680-Length	
	6.60 - 7.00	N/A	N/A	7	9	10	14	17	21	27	34			FS1-700-Length	
	6.69 - 7.09	N/A	N/A	7	9	10	14	17	21	27	34			FS1-709-Length	
	7.06 - 7.46	N/A	N/A	7	9	10	14	17	21	27	34			FS1-746-Length	
	7.55 - 7.95	N/A	N/A	7	9	10	14	17	21	27	34			FS1-795-Length	
Number of Bolts		1	2	2	3	3	4	6	7	9	10				

### FEATURES

- NBR (Buna-N) gasket and conductivity strips are available
- Also available in two-and three-section clamps for a wider range of pipe sizes and tolerances
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

02/01/2021

Submitted By: