


SUBMITTAL INFORMATION

Repair Clamps - (FS1-xxxx-xxx-N style)



10" AND 12" ALL STAINLESS STEEL CIRCLE REPAIR CLAMPS - NBR (BUNA-N GASKET)

Optional Stainless Taps
ASTM A240 Type 304 Stainless
Steel Tig Welded to Band.
Available with AWWA or I.P.
Threads.

Band
ASTM A240 Type 304 Stainless
Steel


Lifter Bar
ASTM A240 Type 304 Heavy
Gauge Stainless Steel

Sidebar
ASTM A240 Type 304 Heavy
Gauge Stainless Steel

Lug
ASTM A240 Type 304
Heavy Gauge Stainless
Steel

Gasket
NBR (Buna-N) per ASTM
D2000

Armor
ASTM A240 Type 304 Heavy Gauge Stainless
Steel, mold bonded into the gasket to ensure
uniform compression against the pipe

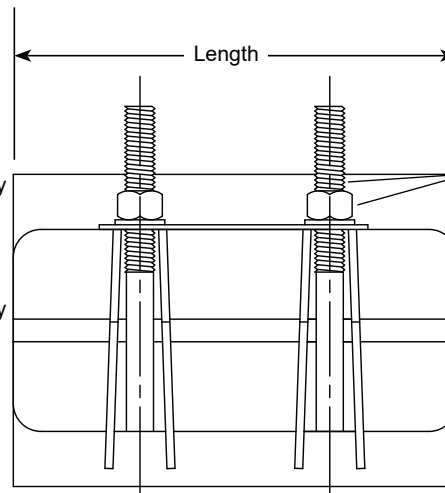

Bolts & Nuts
ASTM A240 Type
304 Stainless
Steel Nuts are
Coated to Prevent
Galling.

OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
Thread	Code No.	Thread	Code No.
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

NOM. PIPE SIZE	PIPE O.D.	LENGTH AND APPROXIMATE WEIGHT (LBS.)								BOLT SIZE	BAND THICKNESS	CATALOG NUMBER FS1-XXXX-LENGTH	✓ SUBMITTED ITEM(S)
	RANGE	7.5"	10"	12.5"	15"	20"	24"	30"	36"				
10"	9.70 - 10.10	11	14	16	24	28	32	42	49	5/8" 11 UNC	20 GA.	FS1-1010-xxx-N	
	10.64 - 11.04											FS1-1104-xxx-N	
	11.04 - 11.44											FS1-1144-xxx-N	
	11.34 - 11.74											FS1-1174-xxx-N	
	11.75 - 12.15											FS1-1215-xxx-N	
12"	12.00 - 12.40	13	16	18	27	30	36	48	57			FS1-1240-xxx-N	
	12.62 - 13.02											FS1-1302-xxx-N	
	13.10 - 13.50											FS1-1350-xxx-N	
	13.40 - 13.80											FS1-1380-xxx-N	
	13.70 - 14.10											FS1-1410-xxx-N	
	14.00 - 14.40											FS1-1440-xxx-N	
Number of Bolts		2	3	4	4	6	7	9	10				

FEATURES

- UL Classified to ANSI/NSF Standard 61
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Also available in two-and three- section clamps for a wider range of pipe sizes and tolerances
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number
- Conductivity strips are available

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/03/17

Submitted By: