



SUBMITTAL INFORMATION

Stainless Steel Saddle - Double Band - (FS323-xxx-TAP-Q-U style)



TAPPED TYPE 316 STAINLESS STEEL SADDLE

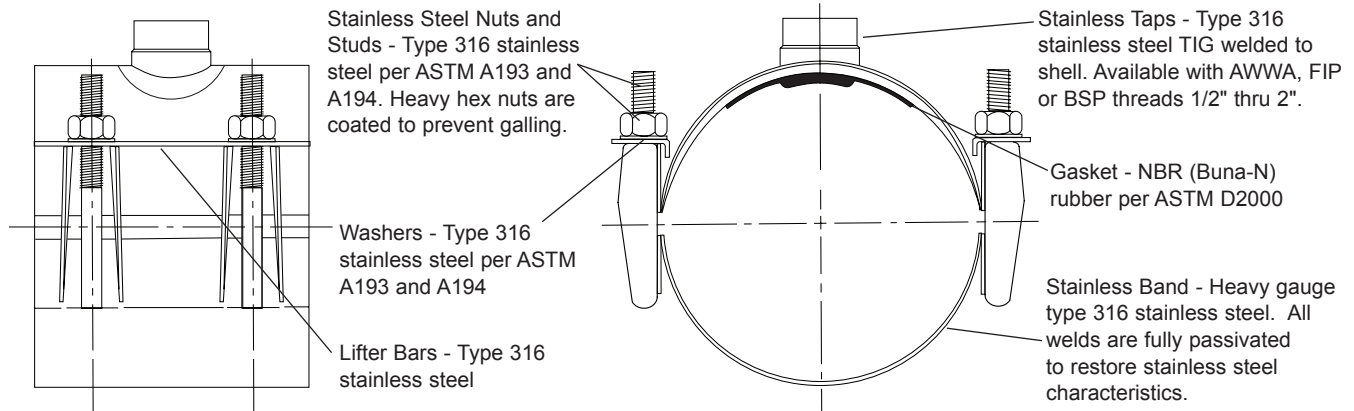

NOM. PIPE SIZE	SADDLE O.D. RANGE (IN.)	TAP SIZE 1/2" - 1"			TAP SIZE 1-1/4", 1-1/2" & 2"			CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.	BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.		
4"	4.74-5.54	6"	5/8"	5.2	7-1/2"	5/8"	5.7	FS323-554-TAP-Q-U	
6"	6.40-7.20	6"	5/8"	5.1	7-1/2"	5/8"	5.8	FS323-720-TAP-Q-U	
8"	8.40-9.20	6"	5/8"	6.3	7-1/2"	5/8"	7.8	FS323-920-TAP-Q-U	
10"	10.70-11.50	6"	5/8"	7.0	7-1/2"	5/8"	9.0	FS323-1150-TAP-Q-U	
12"	12.70-13.50	6"	5/8"	9.0	7-1/2"	5/8"	11.0	FS323-1350-TAP-Q-U	
	14.00-14.80	6"	5/8"		7-1/2"	5/8"		FS323-1480-TAP-Q-U	
14"	14.95-15.75	6"	5/8"	10.0	7-1/2"	5/8"	12.0	FS323-1575-TAP-Q-U	
	15.60-16.40	6"	5/8"		7-1/2"	5/8"		FS323-1640-TAP-Q-U	
16"	15.75-16.55	6"	5/8"	10.5	7-1/2"	5/8"	12.5	FS323-1655-TAP-Q-U	
	16.40-17.20	6"	5/8"		7-1/2"	5/8"		FS323-1720-TAP-Q-U	
	17.20-18.00	6"	5/8"		7-1/2"	5/8"		FS323-1800-TAP-Q-U	
	17.60-18.40	6"	5/8"		7-1/2"	5/8"		FS323-1840-TAP-Q-U	
18"	18.00-18.80	6"	5/8"	10.5	7-1/2"	5/8"	12.5	FS323-1880-TAP-Q-U	
	18.40-19.20	6"	5/8"		7-1/2"	5/8"		FS323-1920-TAP-Q-U	
	18.80-19.60	6"	5/8"		7-1/2"	5/8"		FS323-1960-TAP-Q-U	
	19.20-20.00	6"	5/8"		7-1/2"	5/8"		FS323-2000-TAP-Q-U	

OUTLET TAP CODE

CC (AWWA) THREAD			IP THREAD		
THREAD	CODE NO.	✓ SUBMITTED ITEM(S)	THREAD	CODE NO.	✓ SUBMITTED ITEM(S)
1/2" CC	CC1		1/2" IP	IP1	
3/4" CC	CC3		3/4" IP	IP3	
1" CC	CC4		1" IP	IP4	
1-1/4" CC	CC5		1-1/4" IP	IP5	
1-1/2" CC	CC6		1-1/2" IP	IP6	
2" CC	CC7		2" IP	IP7	

To Order: Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code. Example: A double band saddle for 9.05 O.D. pipe with a 3/4" CC thread would be FS323-920-CC3-Q-U.

FEATURES

- Body, bands and threaded studs are made of type 316 stainless steel
- All welds are fully passivated for corrosion resistance
- Coined body for gasket retention
- Rated for working pressure equal to the lesser of the pipe pressure rating or 250 psi up to 12". 150 psi for sizes 14" and larger.
- NBR (Buna-N) rubber gasket per ASTM D2000
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/10/21

Submitted By: