



# SUBMITTAL INFORMATION

## Stainless Steel Saddle - Double Band - (FS323-xxx-TAP-Q style)



### TAPPED STAINLESS STEEL SADDLE

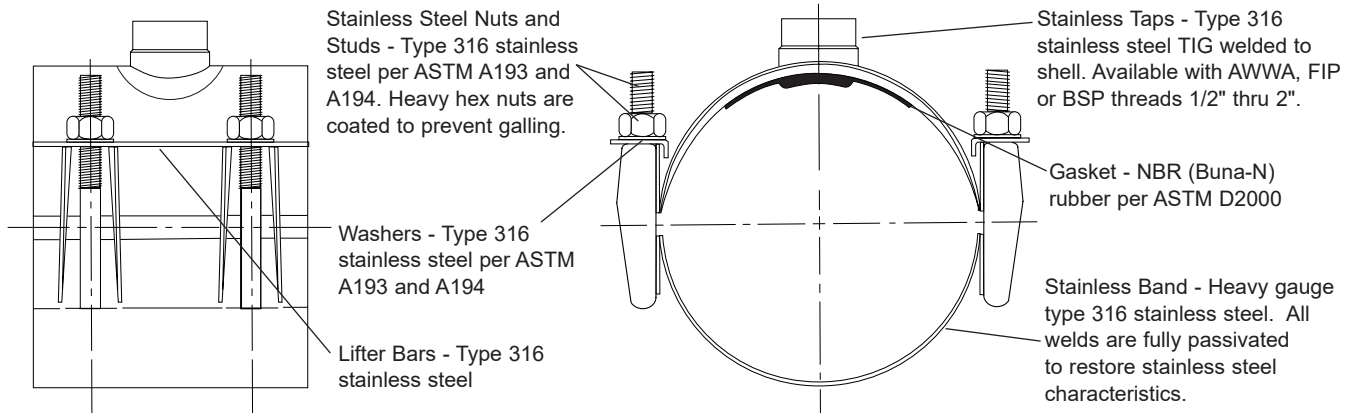

NOM. PIPE SIZE	SADDLE O.D. RANGE (IN.)	TAP SIZE 1/2" - 1"			TAP SIZE 1-1/4", 1-1/2" & 2"			CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.	BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.		
4"	4.74-5.54	6"	5/8"	5.2	7-1/2"	5/8"	5.7	FS323-554-TAP-Q	
6"	6.40-7.20	6"	5/8"	5.1	7-1/2"	5/8"	5.8	FS323-720-TAP-Q	
8"	8.40-9.20	6"	5/8"	6.3	7-1/2"	5/8"	7.8	FS323-920-TAP-Q	
10"	10.70-11.50	6"	5/8"	7.0	7-1/2"	5/8"	9.0	FS323-1150-TAP-Q	
12"	12.70-13.50	6"	5/8"	9.0	7-1/2"	5/8"	11.0	FS323-1350-TAP-Q	
	14.00-14.80	6"	5/8"		7-1/2"	5/8"		FS323-1480-TAP-Q	
	14.95-15.75	6"	5/8"		7-1/2"	5/8"		FS323-1575-TAP-Q	
14"	15.60-16.40	6"	5/8"	10.0	7-1/2"	5/8"	12.0	FS323-1640-TAP-Q	
	15.75-16.55	6"	5/8"		7-1/2"	5/8"		FS323-1655-TAP-Q	
	16.40-17.20	6"	5/8"		7-1/2"	5/8"		FS323-1720-TAP-Q	
16"	17.20-18.00	6"	5/8"	10.5	7-1/2"	5/8"	12.5	FS323-1800-TAP-Q	
	17.60-18.40	6"	5/8"		7-1/2"	5/8"		FS323-1840-TAP-Q	
	18.00-18.80	6"	5/8"		7-1/2"	5/8"		FS323-1880-TAP-Q	
18"	18.40-19.20	6"	5/8"	10.5	7-1/2"	5/8"	12.5	FS323-1920-TAP-Q	
	18.80-19.60	6"	5/8"		7-1/2"	5/8"		FS323-1960-TAP-Q	
	19.20-20.00	6"	5/8"		7-1/2"	5/8"		FS323-2000-TAP-Q	

### OUTLET TAP CODE

CC (AWWA) THREAD			IP THREAD		
THREAD	CODE No.	✓ SUBMITTED ITEM(S)	THREAD	CODE No.	✓ SUBMITTED ITEM(S)
1/2" CC	CC1		1/2" IP	IP1	
3/4" CC	CC3		3/4" IP	IP3	
1" CC	CC4		1" IP	IP4	
1-1/4" CC	CC5		1-1/4" IP	IP5	
1-1/2" CC	CC6		1-1/2" IP	IP6	
2" CC	CC7		2" IP	IP7	

**To Order:** Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code. Example: A double band saddle for 9.05 O.D. pipe with a 3/4" CC thread would be **FS323-920-CC3-Q**.

### FEATURES

- Body, bands and threaded studs are made of type 316 stainless steel
- All welds are fully passivated for corrosion resistance
- Coined body for gasket retention
- Rated for working pressure equal to the lesser of the pipe pressure rating or 250 psi up to 12". 150 psi for sizes 14" and larger.
- NBR (Buna-N) rubber pad gasket per ASTM D2000 with raised compression seal
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

04/01/22

Submitted By: