



SUBMITTAL INFORMATION

Stainless Steel Saddle - Double Band - (FS323-xxx-TAP-U100 style)



TAPPED STAINLESS STEEL SADDLE

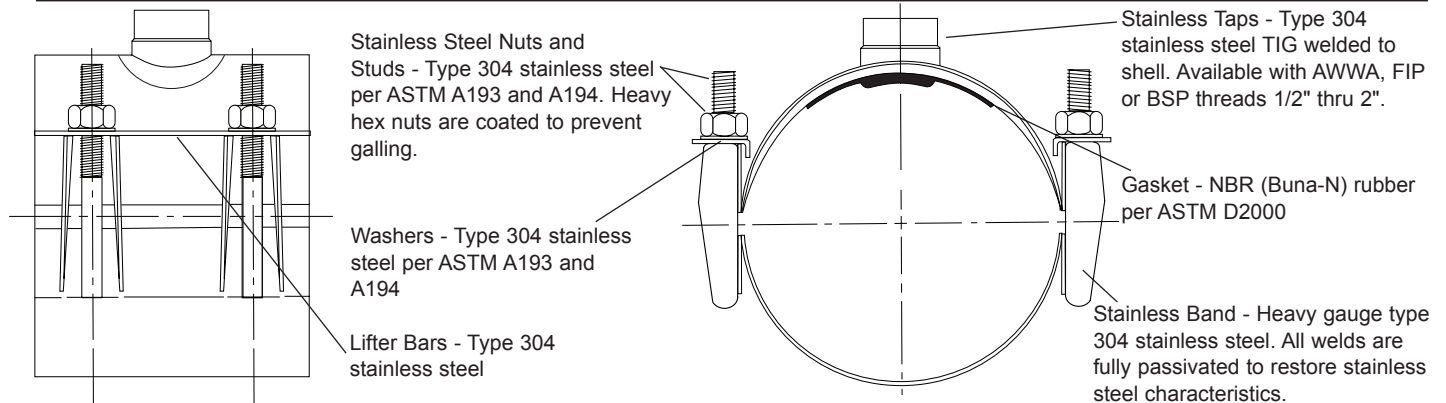

NOM. PIPE SIZE	SADDLE O.D. RANGE (IN.)	TAP SIZE 1/2" - 1"			TAP SIZE 1-1/4", 1-1/2" & 2"			CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.	BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.		
4"	4.74-5.54	6"	5/8"	5.2	7-1/2"	5/8"	5.7	FS323-554-TAP-U100	
6"	6.40-7.20	6"	5/8"	5.1	7-1/2"	5/8"	5.8	FS323-720-TAP-U100	
8"	8.40-9.20	6"	5/8"	6.3	7-1/2"	5/8"	7.8	FS323-920-TAP-U100	
10"	10.70-11.50	6"	5/8"	7.0	7-1/2"	5/8"	9.0	FS323-1150-TAP-U100	
12"	12.70-13.50	6"	5/8"	9.0	7-1/2"	5/8"	11.0	FS323-1350-TAP-U100	
	14.00-14.80	6"	5/8"		7-1/2"	5/8"		FS323-1480-TAP-U100	
14"	14.95-15.75	6"	5/8"	10.0	7-1/2"	5/8"	12.0	FS323-1575-TAP-U100	
	15.60-16.40	6"	5/8"		7-1/2"	5/8"		FS323-1640-TAP-U100	
	15.75-16.55	6"	5/8"		7-1/2"	5/8"		FS323-1655-TAP-U100	
16"	16.40-17.20	6"	5/8"	10.5	7-1/2"	5/8"	12.5	FS323-1720-TAP-U100	
	17.20-18.00	6"	5/8"		7-1/2"	5/8"		FS323-1800-TAP-U100	
	17.60-18.40	6"	5/8"		7-1/2"	5/8"		FS323-1840-TAP-U100	
	18.00-18.80	6"	5/8"		7-1/2"	5/8"		FS323-1880-TAP-U100	
18"	18.40-19.20	6"	5/8"	10.5	7-1/2"	5/8"	12.5	FS323-1920-TAP-U100	
	18.80-19.60	6"	5/8"		7-1/2"	5/8"		FS323-1960-TAP-U100	
	19.20-20.00	6"	5/8"		7-1/2"	5/8"		FS323-2000-TAP-U100	

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NO.	✓ SUBMITTED ITEM(S)
1/2" CC	CC1	
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD		
THREAD	CODE NO.	✓ SUBMITTED ITEM(S)
1/2" IP	IP1	
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	IP5	
1-1/2" IP	IP6	
2" IP	IP7	

To Order: Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code. Example: A double band saddle for 9.05 O.D. pipe with a 3/4" CC thread would be FS323-920-CC3-U100.

FEATURES

- Body, bands and threaded studs are made of type 304 stainless steel
- All welds are fully passivated for corrosion resistance
- Coined body for gasket retention
- Rated for working pressure equal to the lesser of the pipe pressure rating or 250 psi up to 12". 150 psi for sizes 14" and larger.
- NBR (Buna-N) rubber pad gasket per ASTM D2000 with raised compression seal
- Certified to ANSI/NSF Standard 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/10/21

Submitted By: