



SUBMITTAL INFORMATION

Stainless Steel Saddle - Double Band - (FS323-xxx-TAP-V style)



TAPPED STAINLESS STEEL SADDLE

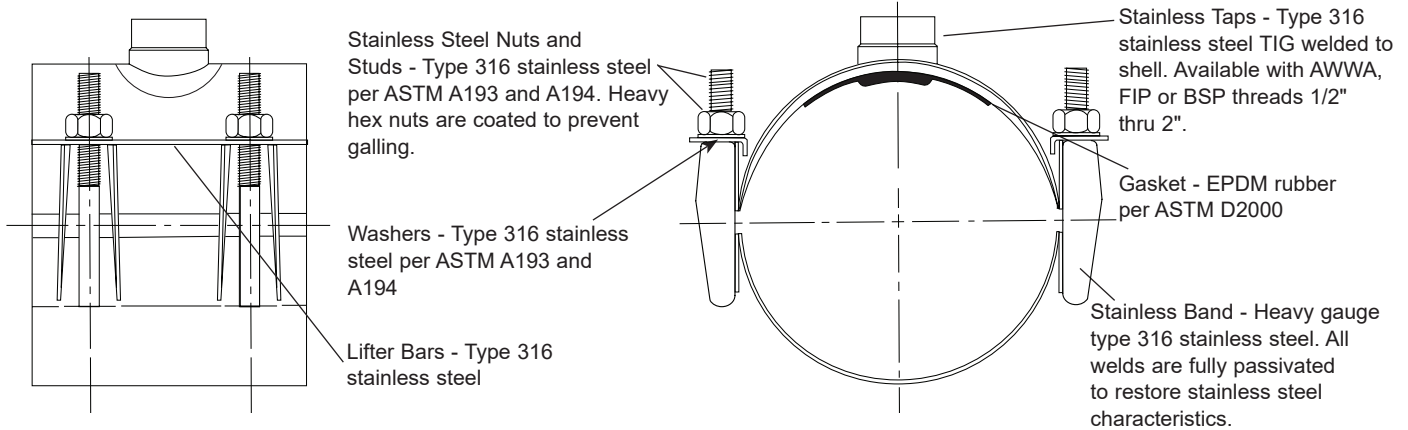

NOM. PIPE SIZE (IN.)	SADDLE O.D. RANGE (IN.)	TAP SIZE 1/2" - 1"			TAP SIZE 1-1/4", 1-1/2" & 2"			CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		BAND WIDTH (IN.)	BOLT SIZE (IN.)	APPROX. WT. LBS.	BAND WIDTH (IN.)	BOLT SIZE (IN.)	APPROX. WT. LBS.		
4	4.74-5.54	6	5/8	5.2	7-1/2	5/8	5.7	FS323-554-TAP-V	
6	6.40-7.20	6	5/8	5.1	7-1/2	5/8	5.8	FS323-720-TAP-V	
8	8.40-9.20	6	5/8	6.3	7-1/2	5/8	7.8	FS323-920-TAP-V	
10	10.70-11.50	6	5/8	7.0	7-1/2	5/8	9.0	FS323-1150-TAP-V	
12	12.70-13.50	6	5/8	9.0	7-1/2	5/8	11.0	FS323-1350-TAP-V	
	14.00-14.80	6	5/8		7-1/2	5/8		FS323-1480-TAP-V	
14	14.95-15.75	6	5/8	10.0	7-1/2	5/8	12.0	FS323-1575-TAP-V	
	15.60-16.40	6	5/8		7-1/2	5/8		FS323-1640-TAP-V	
	15.75-16.55	6	5/8		7-1/2	5/8		FS323-1655-TAP-V	
16	16.40-17.20	6	5/8	10.5	7-1/2	5/8	12.5	FS323-1720-TAP-V	
	17.20-18.00	6	5/8		7-1/2	5/8		FS323-1800-TAP-V	
	17.60-18.40	6	5/8		7-1/2	5/8		FS323-1840-TAP-V	
	18.00-18.80	6	5/8		7-1/2	5/8		FS323-1880-TAP-V	
18	18.40-19.20	6	5/8	10.5	7-1/2	5/8	12.5	FS323-1920-TAP-V	
	18.80-19.60	6	5/8		7-1/2	5/8		FS323-1960-TAP-V	
	19.20-20.00	6	5/8		7-1/2	5/8		FS323-2000-TAP-V	

OUTLET TAP CODE

CC (AWWA) THREAD			IP THREAD		
THREAD	CODE No.	✓ SUBMITTED ITEM(S)	THREAD	CODE No.	✓ SUBMITTED ITEM(S)
1/2" CC	CC1		1/2" IP	IP1	
3/4" CC	CC3		3/4" IP	IP3	
1" CC	CC4		1" IP	IP4	
1-1/4" CC	CC5		1-1/4" IP	IP5	
1-1/2" CC	CC6		1-1/2" IP	IP6	
2" CC	CC7		2" IP	IP7	

To Order: Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code. Example: A double band saddle for 9.05 O.D. pipe with a 3/4" CC thread would be FS323-920-CC3-V.

FEATURES

- Body, bands and threaded studs are made of type 316 stainless steel
- All welds are fully passivated for corrosion resistance
- Coined body for gasket retention
- EPDM rubber pad gasket per ASTM D2000 with raised compression seal
- 4"-12" rated to 250 psi. 14"-18" rated to 150 psi. Rating not to exceed the pressure rating of the pipe
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/15/24

Submitted By: