



SUBMITTAL INFORMATION

Stainless Steel Saddle - Triple Band - (FS333-xxxx-TAP-U100 style)




TAPPED STAINLESS STEEL SADDLE

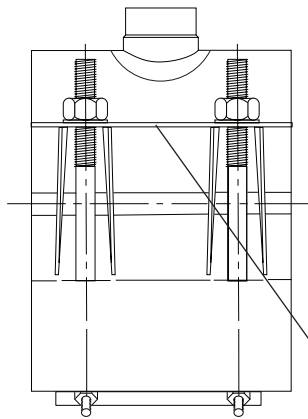

Stainless Steel Nuts and Bolts - Type 304 stainless steel nuts and bolts per ASTM A193 and A194. Nuts are EPIII coated to prevent galling and bolts are MIG welded to side bar.

Washers - Type 304 stainless steel per ASTM A193 and A194.

Lifter Bars - Type 304 stainless steel provides a heavy bearing surface for nuts.

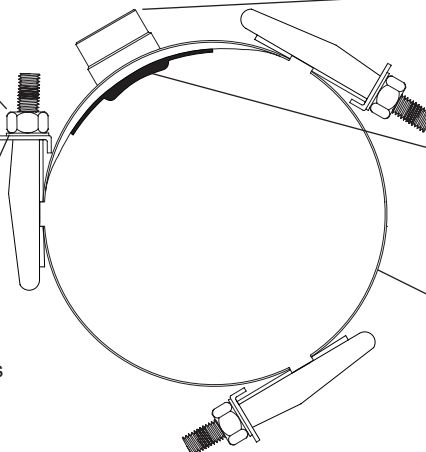

Stainless Taps - Type 304 stainless steel TIG welded to band. Available with AWWA, NPT, or BSP threads.

Gasket - NBR (Buna-N) rubber per ASTM D2000

Stainless Band - Heavy gauge type 304 stainless steel

NOM. PIPE SIZE	SADDLE O.D. RANGE (IN.)	TAP SIZE 1/2" - 1"			TAP SIZE 1-1/4", 1-1/2" & 2"			CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.	BAND WIDTH	BOLT SIZE	APPROX. WT. LBS.		
20"	21.40-22.60	6"	5/8"	14.5	7-1/2"	5/8"	17.0	FS333-2260-TAP-U100	
	22.80-24.00	6"	5/8"		7-1/2"	5/8"		FS333-2400-TAP-U100	
	23.05-24.25	6"	5/8"		7-1/2"	5/8"		FS333-2425-TAP-U100	
	23.45-24.65	6"	5/8"		7-1/2"	5/8"		FS333-2465-TAP-U100	
24"	24.45-25.65	6"	5/8"	15.5	7-1/2"	5/8"	17.5	FS333-2565-TAP-U100	
	25.50-26.70	6"	5/8"		7-1/2"	5/8"		FS333-2670-TAP-U100	
	28.25-29.45	6"	5/8"		7-1/2"	5/8"		FS333-2945-TAP-U100	
30"	29.40-30.60	6"	5/8"	17.0	7-1/2"	5/8"	19.5	FS333-3060-TAP-U100	
	29.85-31.05	6"	5/8"		7-1/2"	5/8"		FS333-3105-TAP-U100	
	30.85-32.05	6"	5/8"		7-1/2"	5/8"		FS333-3205-TAP-U100	

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE No.	✓ SUBMITTED ITEM(S)
1/2" CC	CC1	
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD		
THREAD	CODE No.	✓ SUBMITTED ITEM(S)
1/2" IP	IP1	
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	IP5	
1-1/2" IP	IP6	
2" IP	IP7	

To Order: Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code. Example: A triple band saddle for 25.80 O.D. pipe with a 3/4" CC thread would be FS333-2670-CC3-U100.

FEATURES

- Body, bands and threaded studs are made of type 304 stainless steel
- All welds are fully passivated for corrosion resistance
- Coined body for gasket retention
- NBR (Buna-N) rubber pad gasket per ASTM D2000 with raised compression seal
- Rated for working pressure equal to the lesser of pipe pressure rating or 150 psi
- Certified to ANSI/NSF Standard 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/13/21

Submitted By: