


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTS-xxx-x style)





STEEL TAPPING SLEEVE - 4" TO 16"

Flange - ASTM A36 carbon steel with recess per MSS SP-60 to accept standard tapping valves. Flange conforms to AWWA C207 Class D ANSI 150# drilling

3/4-14 Steel Test Plug

Bolts and Nuts - High strength, low alloy

Finish - Shop coat base for field coatings.

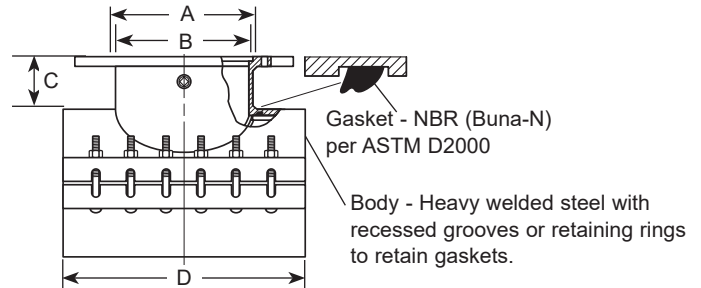

NOM PIPE SIZE (IN.)	SLEEVE OD RANGE (IN.)	FLANGE SIZE CODE	NOMINAL DIMENSIONS - INCHES				MIN. NO. OF BOLTS	BOLT DIA. (IN.)	APPROX WEIGHT LBS.	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
			COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
			A	B	C	D					
4	4.50-4.80	2	3-3/64	2-1/16	5-1/16	12	8	5/8	43	*FTS-480-x	
	4.80-5.10	3	4-3/64	3-1/16	5-1/16	12	8	5/8	44	*FTS-510-x	
		4	5-3/64	4-1/8	5-1/16	12	8	5/8	45		
6	6.57-6.73	2	3-3/64	2-1/16	5-1/16	12	6	3/4	65	*FTS-673-x	
	6.83-7.16	3	4-3/64	3-1/16	5-1/16	12	6	3/4	67	FTS-716-x	
	7.20-7.60	4	5-3/64	4-1/8	5-1/16	12	6	3/4	70	FTS-760-x	
	7.40-7.73	6	7-3/64	6-1/4	5-1/16	12	6	3/4	75	FTS-773-x	
	7.95-8.05	2	3-3/64	2-1/16	5-3/16	12	6	3/4	71	**FTS-805-x	
8	8.36-8.75	3	4-3/64	3-1/16	5-3/16	12	6	3/4	73	*FTS-875-x	
	8.73-9.12	4	5-3/64	4-1/8	5-3/16	12	6	3/4	76	FTS-912-x	
	8.89-9.37	6	7-3/64	6-1/4	5-3/16	12	6	3/4	86	FTS-937-x	
	9.27-9.69	8	9-3/64	8-1/4	5-3/16	16	8	3/4	93	FTS-969-x	
		2	3-3/64	2-1/16	5-3/16	12	6	3/4	79		
10	9.95-10.10	3	4-3/64	3-1/16	5-3/16	12	6	3/4	81	**FTS-1010-x	
	10.45-10.88	4	5-3/64	4-1/8	5-3/16	12	6	3/4	84	FTS-1088-x	
	11.03-11.47	6	7-3/64	6-1/4	5-3/16	12	6	3/4	93	FTS-1147-x	
	11.36-11.80	8	9-3/64	8-1/4	5-3/16	16	8	3/4	130	FTS-1180-x	
		10	11-3/64	10-1/4	5-3/16	20	10	3/4	139		
12	11.76-12.20	2	3-3/64	2-1/16	5-3/16	12	6	3/4	87		
	12.42-12.88	3	4-3/64	3-1/16	5-3/16	12	6	3/4	89	**FTS-1220-x	
	13.13-13.60	4	5-3/64	4-1/8	5-3/16	12	6	3/4	92	FTS-1288-x	
	13.60-14.09	6	7-3/64	6-1/4	5-3/16	12	6	3/4	100	FTS-1360-x	
	14.10-14.58	8	9-3/64	8-1/4	5-3/16	16	8	3/4	140	FTS-1409-x	
		10	11-3/64	10-1/4	5-3/16	20	10	3/4	190	FTS-1458-x	
14-16		12	13-3/64	12-1/4	5-3/16	24	12	3/4	199		
	14.59-15.08	2	3-3/64	2-1/16	5-3/16	12	6	3/4	94		
	15.23-15.72	3	4-3/64	3-1/16	5-3/16	12	6	3/4	96	**FTS-1508-x	
	15.73-16.22	4	5-3/64	4-1/8	5-3/16	12	6	3/4	99	FTS-1572-x	
	16.30-16.73	6	7-3/64	6-1/4	5-3/16	12	6	3/4	110	FTS-1622-x	
	16.74-17.26	8	9-3/64	8-1/4	5-3/16	16	8	3/4	152	FTS-1673-x	
		10	11-3/64	10-1/4	5-3/16	20	10	3/4	203	FTS-1726-x	
		12	13-3/64	12-1/4	5-3/16	24	12	3/4	228		
		14	15-5/16	13-1/2	6-1/4	28	14	3/4	253		

* These units for size on size taps may require a 1/2" under size cutter.

** Size on size for this range not available.

*** To order: Add Flange Size to the Sleeve Number. Example: A 4" flange on 6" cast iron pipe would be FTS-716-4. For stainless steel nuts and bolts option, add "-SH" to the catalog number. Example: FTS-716-4-SH.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of high strength, low alloy per ASTM A242 and AWWA C111
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Certified to ANSI/NSF 61
- Meets AWWA C223 and MSS SP-60
- Rated for 250 psi. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/21/25

Submitted By: