


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTS-xxxx-xx-MJ style)



STEEL TAPPING SLEEVE - 16" TO 30" WITH MECHANICAL JOINT OUTLET

MJ Adapter Outlet - Compatible with AWWA C111 Mechanical Joint fittings



Connecting Gasket - NBR (Buna-N) per ASTM D2000

Support Ring - ASTM A36 Carbon Steel

3/4-14 Steel Test Plug

Bolts and Nuts - High strength, low alloy

Finish - Shop coat base for field coatings

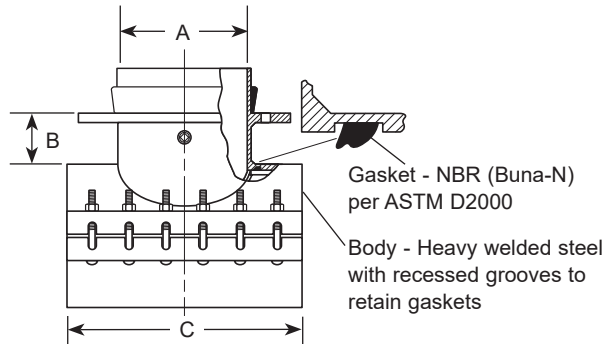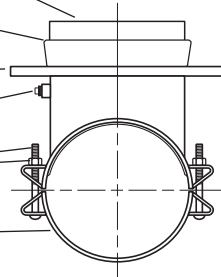

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	OUTLET SIZE CODE	NOMINAL DIMENSIONS - INCHES			MIN. NO. OF BOLTS	APPROX. WT. LBS.	SLEEVE NUMBER*	✓ SUBMITTED ITEM(S)
				A	B	C				
16"-18"	17.33-17.87		3	3-1/16"	5-3/16"	12	6	113	FTS-1787-xx-MJ	
	17.88-18.43		4	4-1/8"	5-3/16"	12		114	FTS-1843-xx-MJ	
	18.46-19.03		6	6-1/4"	5-3/16"	12		120	FTS-1903-xx-MJ	
	18.87-19.45		8	8-1/4"	5-3/16"	16	8	159	FTS-1945-xx-MJ	
	19.41-20.01		10	10-1/4"	5-3/16"	20	10	203	FTS-2001-xx-MJ	
			12	12-1/4"	5-3/16"	24	12	256		
18"-20"	19.88-20.48		3	3-1/16"	5-3/16"	12	6	121	FTS-2048-xx-MJ	
	20.29-20.92		4	4-1/8"	5-3/16"	12		122	FTS-2092-xx-MJ	
	20.93-21.57		6	6-1/4"	5-3/16"	12		128	FTS-2157-xx-MJ	
	21.51-22.15		8	8-1/4"	5-3/16"	16	8	170	FTS-2215-xx-MJ	
	22.16-22.81		10	10-1/4"	5-3/16"	20	10	216	FTS-2281-xx-MJ	
			12	12-1/4"	5-3/16"	24	12	273		
20"-24"	22.78-23.45		3	3-1/16"	5-3/16"	12	6	132	FTS-2345-xx-MJ	
	23.46-24.16		4	4-1/8"	5-3/16"	12		133	FTS-2416-xx-MJ	
	24.15-24.85		6	6-1/4"	5-3/16"	12		136	FTS-2485-xx-MJ	
	24.82-25.52		8	8-1/4"	5-3/16"	16	8	180	FTS-2552-xx-MJ	
			10	10-1/4"	5-3/16"	20	10	229		
			12	12-1/4"	5-3/16"	24	12	299		
24"	25.71-26.41		3	3-1/16"	5-3/16"	12	6	148	FTS-2641-xx-MJ	
	26.55-27.25		4	4-1/8"	5-3/16"	12		149	FTS-2725-xx-MJ	
	27.26-27.96		6	6-1/4"	5-3/16"	12		153	FTS-2796-xx-MJ	
	28.14-28.84		8	8-1/4"	5-3/16"	16	8	212	FTS-2884-xx-MJ	
			10	10-1/4"	5-3/16"	20	10	260		
			12	12-1/4"	5-3/16"	24	12	323		
30"	29.78-30.48		3	3-1/16"	5-3/16"	12	6	161	FTS-3048-xx-MJ	
	30.48-31.18		4	4-1/8"	5-3/16"	12		162	FTS-3118-xx-MJ	
	31.52-32.22		6	6-1/4"	5-3/16"	12		168	FTS-3222-xx-MJ	
			8	8-1/4"	5-3/16"	16	8	222		
			10	10-1/4"	5-3/16"	20	10	283		
			12	12-1/4"	5-3/16"	24	12	350		

***To Order:** Add outlet size to the sleeve number. Example: A 12" outlet on 24" cast iron pipe would be FTS-2641-12-MJ. For stainless steel nuts and bolts option, add "-SH" to the catalog number. Example: FTS-2641-12-MJ-SH.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of high strength, low alloy per ASTM A242 and AWWA C111
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/08/22

Submitted By: