



# SUBMITTAL INFORMATION

## Stainless Steel Tapping Sleeve 4"-12" - (FTSAS-xxx-x-Q style)



### 316 STAINLESS STEEL TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

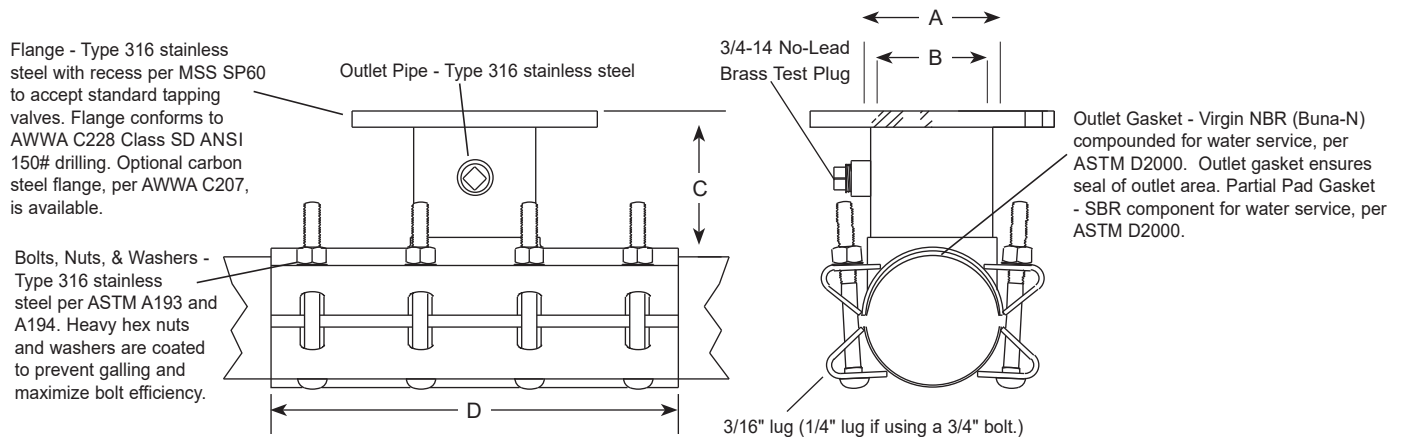

| NOM. PIPE SIZE | SLEEVE O.D. RANGE (IN.)                   | SLEEVE NUMBER  | FLANGE SIZE CODE | NOMINAL DIMENSIONS - INCHES |                |                              |       | MIN. NO. OF BOLTS | SIZE OF BOLTS | APPROX. WEIGHT LBS. | ✓ SUBMITTED ITEM(S) |
|----------------|-------------------------------------------|----------------|------------------|-----------------------------|----------------|------------------------------|-------|-------------------|---------------|---------------------|---------------------|
|                |                                           |                |                  | COUNTER-BORE ID             | OUTLET PIPE ID | TOP OF PIPE TO TOP OF FLANGE | WIDTH |                   |               |                     |                     |
|                |                                           |                |                  | A                           | B              | C                            | D     |                   |               |                     |                     |
| 4"             | 4.50-4.80                                 | FTSAS-480-x-Q  | 2                | 3-1/16                      | 3-1/4          | 5-3/8                        | 15    | 8                 | 5/8           | 39                  |                     |
|                |                                           |                | 3                | 4-1/16                      | 3-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 40                  |                     |
|                |                                           |                | 4                | 5-1/16                      | 4-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 40                  |                     |
| 6"             | 6.63-7.00<br>6.90-7.30                    | FTSAS-700-x-Q  | 2                | 3-1/16                      | 3-1/4          | 5-3/8                        | 15    | 8                 | 5/8           | 65                  |                     |
|                |                                           |                | 3                | 4-1/16                      | 3-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 66                  |                     |
|                |                                           | FTSAS-730-x-Q  | 4                | 5-1/16                      | 4-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 67                  |                     |
|                |                                           |                | 6                | 7-1/16                      | 6-13/32        | 5-1/4                        | 15    | 8                 | 5/8           | 74                  |                     |
|                |                                           |                | 2                | 3-1/16                      | 3-1/4          | 5-3/8                        | 15    | 8                 | 5/8           | 83                  |                     |
| 8"             | 8.63-9.05<br>9.05-9.30                    | FTSAS-905-x-Q  | 3                | 4-1/16                      | 3-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 84                  |                     |
|                |                                           |                | 4                | 5-1/16                      | 4-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 85                  |                     |
|                |                                           | FTSAS-930-x-Q  | 6                | 7-1/16                      | 6-13/32        | 5-1/4                        | 15    | 8                 | 5/8           | 89                  |                     |
|                |                                           |                | 8                | 9-1/16                      | 8-13/32        | 5-3/8                        | 20    | 12                | 5/8           | 94                  |                     |
|                |                                           |                | 2                | 3-1/16                      | 3-1/4          | 5-3/8                        | 15    | 8                 | 5/8           | 88                  |                     |
| 10"            | 10.75-11.10<br>11.10-11.40<br>11.40-11.70 | FTSAS-1110-x-Q | 3                | 4-1/16                      | 3-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 89                  |                     |
|                |                                           |                | 4                | 5-1/16                      | 4-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 90                  |                     |
|                |                                           | FTSAS-1140-x-Q | 6                | 7-1/16                      | 6-13/32        | 5-1/4                        | 15    | 8                 | 5/8           | 93                  |                     |
|                |                                           |                | 8                | 9-1/16                      | 8-13/32        | 5-3/8                        | 20    | 12                | 5/8           | 99                  |                     |
|                |                                           |                | 10               | 11-1/16                     | 10-15/32       | 5-7/8                        | 20    | 12                | 3/4           | 111                 |                     |
| 12"            | 12.75-13.20<br>13.20-13.50                | FTSAS-1320-x-Q | 2                | 3-1/16                      | 3-1/4          | 5-3/8                        | 15    | 8                 | 5/8           | 96                  |                     |
|                |                                           |                | 3                | 4-1/16                      | 3-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 97                  |                     |
|                |                                           | FTSAS-1350-x-Q | 4                | 5-1/16                      | 4-1/4          | 4-15/16                      | 15    | 8                 | 5/8           | 98                  |                     |
|                |                                           |                | 6                | 7-1/16                      | 6-13/32        | 5-1/4                        | 15    | 8                 | 5/8           | 102                 |                     |
|                |                                           |                | 8                | 9-1/16                      | 8-13/32        | 5-3/8                        | 20    | 12                | 5/8           | 108                 |                     |
|                |                                           |                | 10               | 11-1/16                     | 10-15/32       | 5-7/8                        | 20    | 12                | 3/4           | 188                 |                     |
|                |                                           |                | 12               | 13-1/16                     | 12-13/32       | 6                            | 24    | 14                | 3/4           | 207                 |                     |

\* To order: Add flanged outlet size to catalog number. Example: The complete FTSAS catalog number for a 6" pipe (6.90 O.D.) with a 4" stainless steel flange is FTSAS-730-4-Q. For a carbon steel flange, add "A" to the catalog number. Example: FTSAS-730-4A-Q

#### FEATURES

- Body, straps and UNC threaded bolts are made of type 316 stainless steel. Flange can be either stainless steel or ASTM A36 carbon steel. All sleeves are fully passivated for corrosion resistance.
- Outlet gasket is NBR (Buna-N) per ASTM 2000.
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

08/08/22

Submitted By: