



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve 14"-18" - (FTSAS-xxxx-xx-MJ-U100 style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

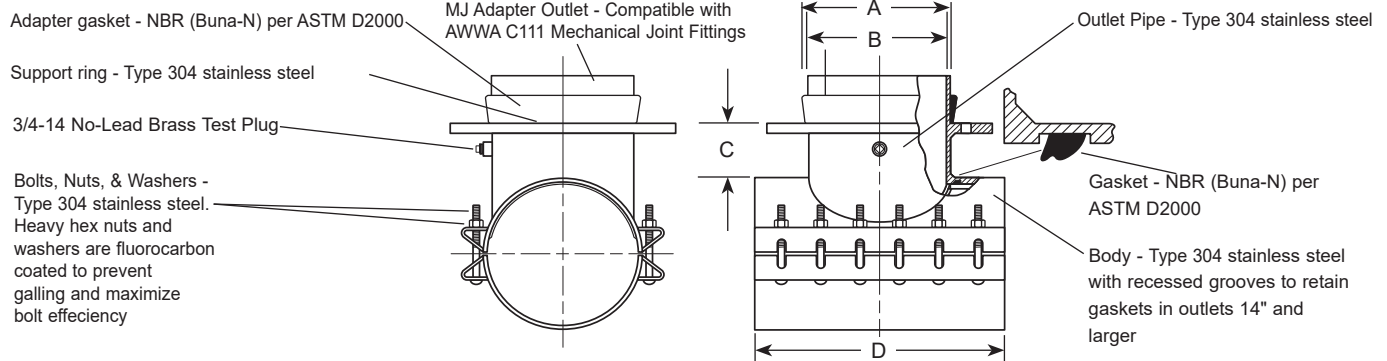

NOM PIPE SIZE (IN.)	SLEEVE OD RANGE (IN.)	OUTLET SIZE CODE	NOMINAL DIMENSIONS - INCHES				MIN. NO. OF BOLTS	APPROX WEIGHT LBS.	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
			A	B	C	D				
14	15.23-15.72 15.73-16.22 16.30-16.73 16.74-17.26	3	4-1/64	3-1/4	5-3/16	16	10	236	FTSAS-1572-xx-MJ-U100 FTSAS-1622-xx-MJ-U100 FTSAS-1673-xx-MJ-U100 FTSAS-1726-xx-MJ-U100	
		4	5-1/64	4-1/4	5-3/16	16	10	237		
		6	7-1/64	6-13/32	5-3/16	16	10	240		
		8	9-1/64	8-13/32	5-3/16	16	10	245		
		10	11-1/64	10-31/64	5-3/16	20	12	263		
		12	13-1/64	12-27/64	5-3/16	24	14	288		
		14	15-9/32	13-1/4	6-1/4	24	14	300		
16	17.33-17.87 17.88-18.43 18.46-19.03 18.87-19.45	3	4-1/64	3-1/4	5-3/16	16	10	135	FTSAS-1787-xx-MJ-U100 FTSAS-1843-xx-MJ-U100 FTSAS-1903-xx-MJ-U100 FTSAS-1945-xx-MJ-U100	
		4	5-1/64	4-1/4	5-3/16	16	10	136		
		6	7-1/64	6-13/32	5-1/2	16	10	139		
		8	9-1/64	8-13/32	5-5/8	20	10	144		
		10	11-1/64	10-31/64	6-1/8	20	12	246		
		12	13-1/64	12-27/64	6-1/4	24	14	273		
		14	15-9/32	13-1/4	6-1/4	24	14	285		
18	19.41-20.01 19.88-20.48 20.29-20.92 20.93-21.57	16	17-9/32	15-1/2	6-1/4	32	20	342		
		3	4-1/64	3-1/4	5-3/16	16	10	230	FTSAS-2001-xx-MJ-U100 FTSAS-2048-xx-MJ-U100 FTSAS-2092-xx-MJ-U100 FTSAS-2157-xx-MJ-U100	
		4	5-1/64	4-1/4	5-3/16	16	10	231		
		6	7-1/64	6-13/32	5-1/2	16	10	234		
		8	9-1/64	8-13/32	5-5/8	20	10	239		
		10	11-1/64	10-31/64	6-1/8	20	12	260		
		12	13-1/64	12-27/64	6-1/4	24	12	290		
		14	15-9/32	13-1/4	6-1/4	24	14	302		
		16	17-9/32	15-1/2	6-1/4	32	20	358		
		18	19-1/2	17-1/2	6-1/4	36	24	450		

Note: The complete FTSAS catalog number for a 16" pipe (17.87 O.D.) with a 16" stainless steel flange is FTSAS-1787-16-MJ-U100. For carbon steel flange, add "A" to the catalog number. Example: FTSAS-1787-16A-MJ-U100.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Body, straps and UNC threaded bolts are made of 18-8 Type 304 stainless steel. Flange can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) ASTM D2000
- Other sizes and ranges available. Contact your Ford Meter Box representative for details
- Removable bolts provide better accessibility
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

05/20/25

Submitted By: