



# SUBMITTAL INFORMATION

## Stainless Steel Tapping Sleeve 14"-18" - (FTSAS-xxxx-xx-MJ style)



### TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

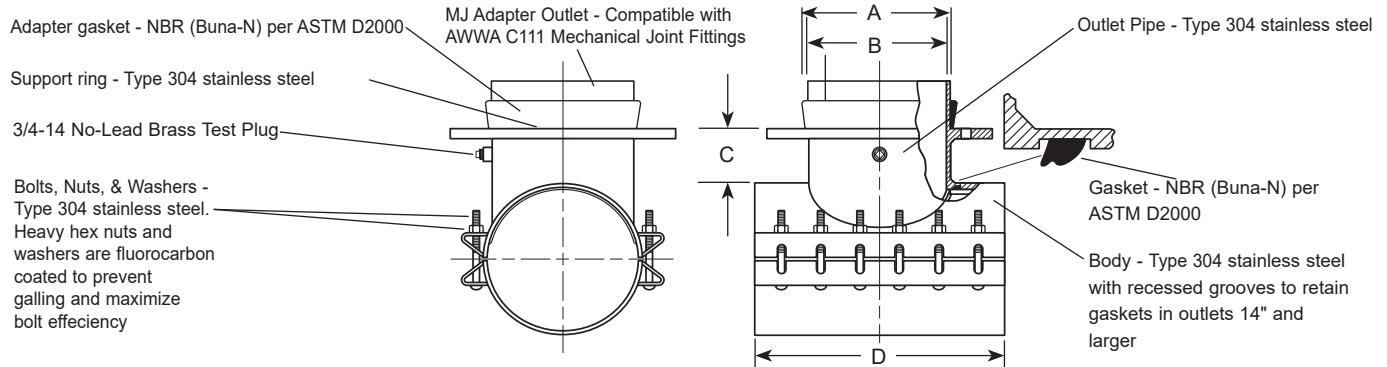

| NOM<br>PIPE<br>SIZE | SLEEVE<br>OD<br>RANGE (IN.)                              | OUTLET<br>SIZE<br>CODE | NOMINAL DIMENSIONS - INCHES |           |         |     | MIN. NO.<br>OF<br>BOLTS | APPROX<br>WEIGHT<br>LBS. | SLEEVE<br>NUMBER                                                             | ✓ SUBMITTED<br>ITEM(S) |
|---------------------|----------------------------------------------------------|------------------------|-----------------------------|-----------|---------|-----|-------------------------|--------------------------|------------------------------------------------------------------------------|------------------------|
|                     |                                                          |                        | A                           | B         | C       | D   |                         |                          |                                                                              |                        |
| 14"                 | 15.23-15.72<br>15.73-16.22<br>16.30-16.73<br>16.74-17.26 | 3                      | 4-1/64"                     | 3-1/4"    | 5-3/16" | 16" | 10                      | 236                      | FTSAS-1572-xx-MJ<br>FTSAS-1622-xx-MJ<br>FTSAS-1673-xx-MJ<br>FTSAS-1726-xx-MJ |                        |
|                     |                                                          | 4                      | 5-1/64"                     | 4-1/4"    | 5-3/16" | 16" | 10                      | 237                      |                                                                              |                        |
|                     |                                                          | 6                      | 7-1/64"                     | 6-13/32"  | 5-3/16" | 16" | 10                      | 240                      |                                                                              |                        |
|                     |                                                          | 8                      | 9-1/64"                     | 8-13/32"  | 5-3/16" | 16" | 10                      | 245                      |                                                                              |                        |
|                     |                                                          | 10                     | 11-1/64"                    | 10-31/64" | 5-3/16" | 20" | 12                      | 263                      |                                                                              |                        |
|                     |                                                          | 12                     | 13-1/64"                    | 12-27/64" | 5-3/16" | 24" | 14                      | 288                      |                                                                              |                        |
|                     |                                                          | 14                     | 15-9/32"                    | 13-1/4"   | 6-1/4"  | 24" | 14                      | 300                      |                                                                              |                        |
| 16"                 | 17.33-17.87<br>17.88-18.43<br>18.46-19.03<br>18.87-19.45 | 3                      | 4-1/64"                     | 3-1/4"    | 5-3/16" | 16" | 10                      | 135                      | FTSAS-1787-xx-MJ<br>FTSAS-1843-xx-MJ<br>FTSAS-1903-xx-MJ<br>FTSAS-1945-xx-MJ |                        |
|                     |                                                          | 4                      | 5-1/64"                     | 4-1/4"    | 5-3/16" | 16" | 10                      | 136                      |                                                                              |                        |
|                     |                                                          | 6                      | 7-1/64"                     | 6-13/32"  | 5-1/2"  | 16" | 10                      | 139                      |                                                                              |                        |
|                     |                                                          | 8                      | 9-1/64"                     | 8-13/32"  | 5-5/8"  | 20" | 10                      | 144                      |                                                                              |                        |
|                     |                                                          | 10                     | 11-1/64"                    | 10-31/64" | 6-1/8"  | 20" | 12                      | 246                      |                                                                              |                        |
|                     |                                                          | 12                     | 13-1/64"                    | 12-27/64" | 6-1/4"  | 24" | 14                      | 273                      |                                                                              |                        |
|                     |                                                          | 14                     | 15-9/32"                    | 13-1/4"   | 6-1/4"  | 24" | 14                      | 285                      |                                                                              |                        |
| 18"                 | 19.41-20.01<br>19.88-20.48<br>20.29-20.92<br>20.93-21.57 | 16                     | 17-9/32"                    | 15-1/2"   | 6-1/4"  | 32" | 20                      | 342                      |                                                                              |                        |
|                     |                                                          | 3                      | 4-1/64"                     | 3-1/4"    | 5-3/16" | 16" | 10                      | 230                      | FTSAS-2001-xx-MJ<br>FTSAS-2048-xx-MJ<br>FTSAS-2092-xx-MJ<br>FTSAS-2157-xx-MJ |                        |
|                     |                                                          | 4                      | 5-1/64"                     | 4-1/4"    | 5-3/16" | 16" | 10                      | 231                      |                                                                              |                        |
|                     |                                                          | 6                      | 7-1/64"                     | 6-13/32"  | 5-1/2"  | 16" | 10                      | 234                      |                                                                              |                        |
|                     |                                                          | 8                      | 9-1/64"                     | 8-13/32"  | 5-5/8"  | 20" | 10                      | 239                      |                                                                              |                        |
|                     |                                                          | 10                     | 11-1/64"                    | 10-31/64" | 6-1/8"  | 20" | 12                      | 260                      |                                                                              |                        |
|                     |                                                          | 12                     | 13-1/64"                    | 12-27/64" | 6-1/4"  | 24" | 12                      | 290                      |                                                                              |                        |
|                     |                                                          | 14                     | 15-9/32"                    | 13-1/4"   | 6-1/4"  | 24" | 14                      | 302                      |                                                                              |                        |
|                     |                                                          | 16                     | 17-9/32"                    | 15-1/2"   | 6-1/4"  | 32" | 20                      | 358                      |                                                                              |                        |
| 18                  | 19-1/2"                                                  | 17-1/2"                | 6-1/4"                      | 36"       | 24      | 450 |                         |                          |                                                                              |                        |

**Note:** The complete FTSAS catalog number for a 16" pipe (17.87 O.D.) with a 16" stainless steel flange is FTSAS-1787-16-MJ. For carbon steel flange, add "A" to the catalog number. Example: FTSAS-1787-16A-MJ.

**Note:** A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

### FEATURES

- Body, straps and UNC threaded bolts are made of 18-8 Type 304 stainless steel. Flange can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) ASTM D2000
- Other sizes and ranges available. Contact your Ford Meter Box representative for details
- Removable bolts provide better accessibility
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

08/08/22

Submitted By: